

Motorola Moto G4 Play Screen Replacement

Before you begin, download the Rescue and Smart...

Written By: Michael Cottone



INTRODUCTION

Before you begin, download the <u>Rescue and Smart Assistant</u> app to backup your device and diagnose whether your problem is software or hardware related.



TOOLS:

Tournevis cruciforme #00 (1)

Spudger (spatule antistatique) (1)

Pincettes de précision (1)

Step 1 — Remove back plate



Remove back plate starting with this tab

Step 2



- remove battery
- remove SD card and sim card

Step 3 — remove screws and inner back plate






- remove 16 phillips 00 screws
 - the two screws on either side of the battery (red color on thread) are shorter than the other screws (blue color on thread)
- don't forget this one hiding underneath this sticker
- no screw here
- remove the inner back plate

Step 4 — Remove the motherboard







- disconnect antenna cable from motherboard with a spudger.
- disconnect screen and digitiser cables with a spudger.
- remove rear facing camera with a spudger
- remove phillips 00 screw
- Remove motherboard. this cable is still connected, you must disconnect it as you remove the motherboard.

1 There is a cable attached to the bottom of the motherboard, be careful when removing it

Step 5 — Remove USB accessory board






- disconnect antenna and data cable
- remove philips 00 screws
- Remove usb board and vibrator together.

vibrator is attached to usb board from the bottom, be careful and remove them together to prevent damage.

Step 6 — Remove remaining components from screen assembly

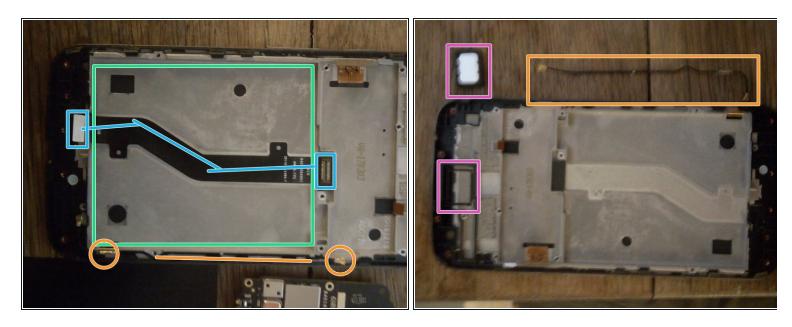

- Peel off black sticker under battery compartment.
- peel off data cable
- remove antenna wire
- remove speaker

To reassemble your device, follow these instructions in reverse order.