

INTRODUCTION

This guide provides instruction on how to replace a broken or damaged touch pad on the HP Pavilion G7-2289wm laptop.

TOOLS:

[Phillips #0 Screwdriver](#) (1)


[iFixit Opening Tool](#) (1)

Step 1 — Battery




- Located on the bottom side of your laptop, slide the battery release latch to the left, towards the center of the laptop.
- Lift the battery up, and pull towards the center of the laptop to remove it.

Step 2 — Hard Drive

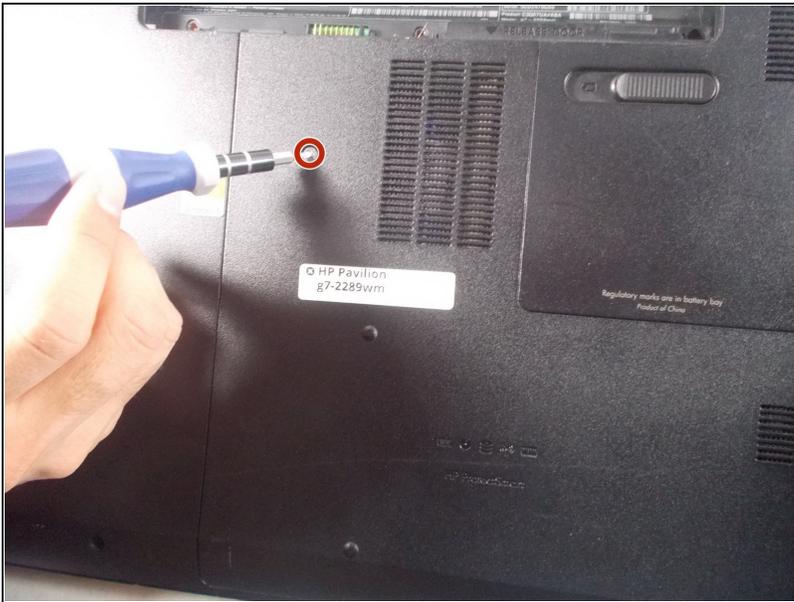

- Loosen the screw that secures the service cover using a Phillips #0 screwdriver.
- Pull the edge of the service cover toward you to remove it.

Step 3

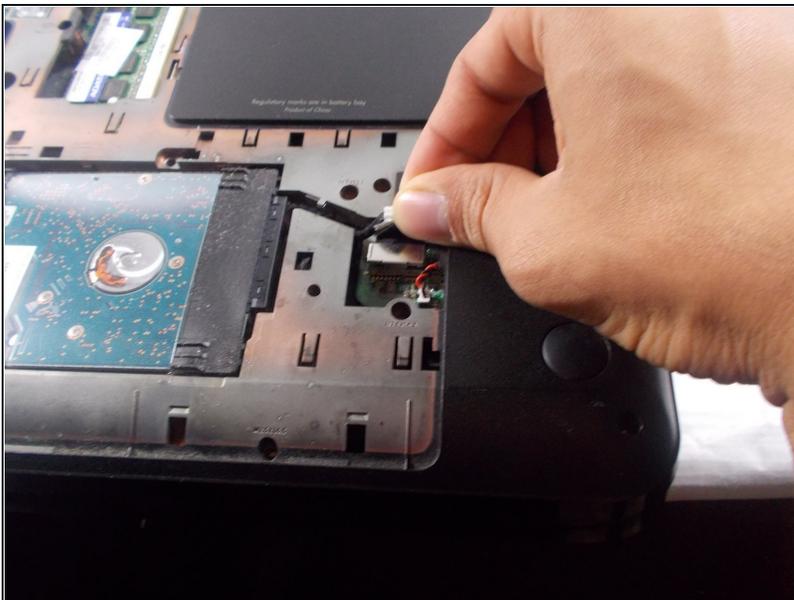

- Disconnect the hard drive connector cable from the motherboard.

Step 4



- Lift the front edge of the hard drive, then pull the hard drive out gently.

Step 5 — Keyboard



- Remove all the screw that secures the keyboard to the computer using a Phillips #0 screwdriver.

Step 6




- Flip your laptop around to the front, using an opening tool, pry around the perimeter of the keyboard.
- Lift the keyboard from the top backward towards the touch pad.
- Unlatch the keyboard connector from the motherboard and remove the keyboard.

Step 7 — Touchpad




- Remove the wires attached to the button pad.

Step 8

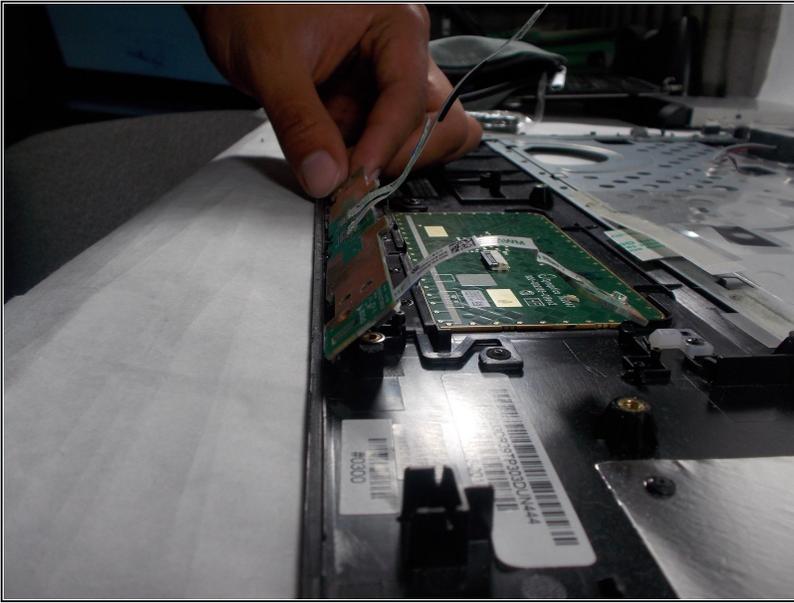

- Carefully lift and remove the button board.

Step 9

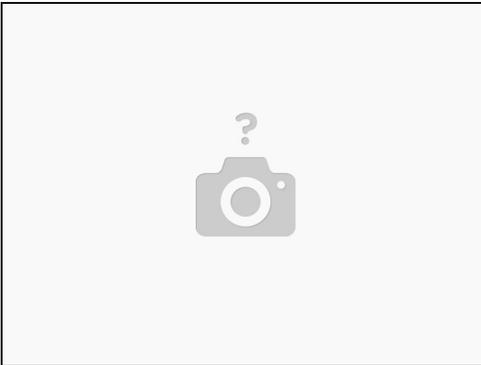

- Remove all screws from the bottom of the laptop.

To reassemble your device, follow these instructions in reverse order.