




# Dell Inspiron 13z 5323 Memory Module Replacement


Written By: Terrence15

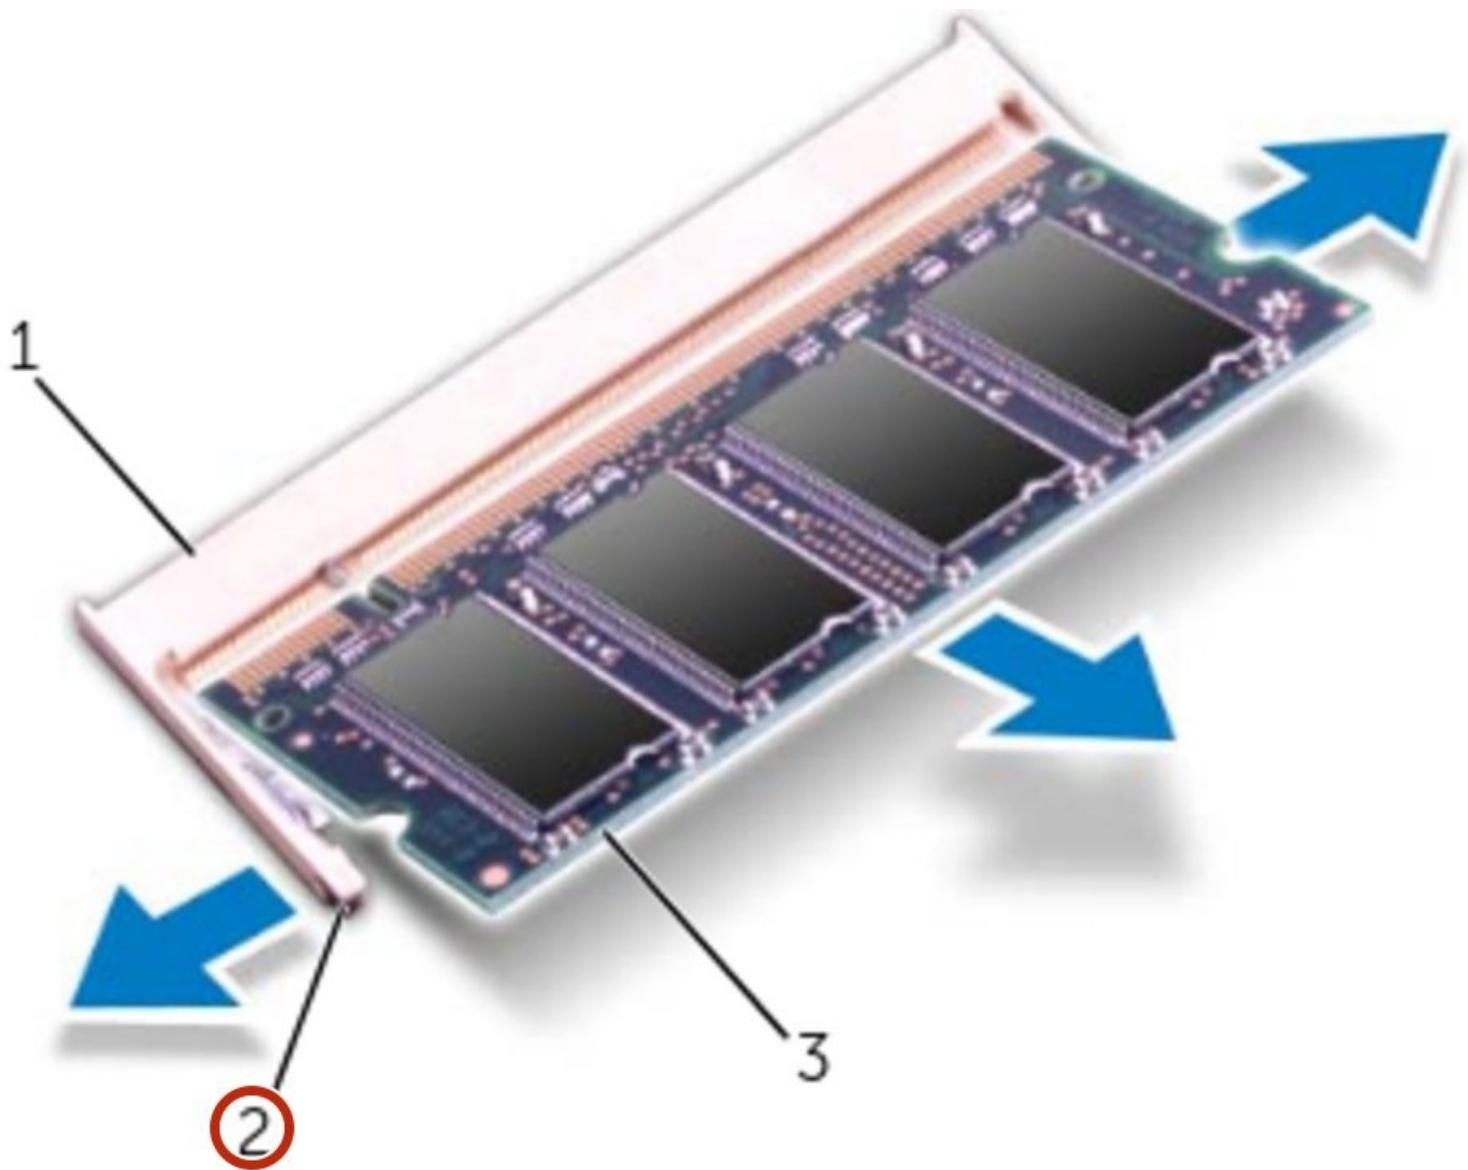

## INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

## Step 1 — Popping up the Memory Module

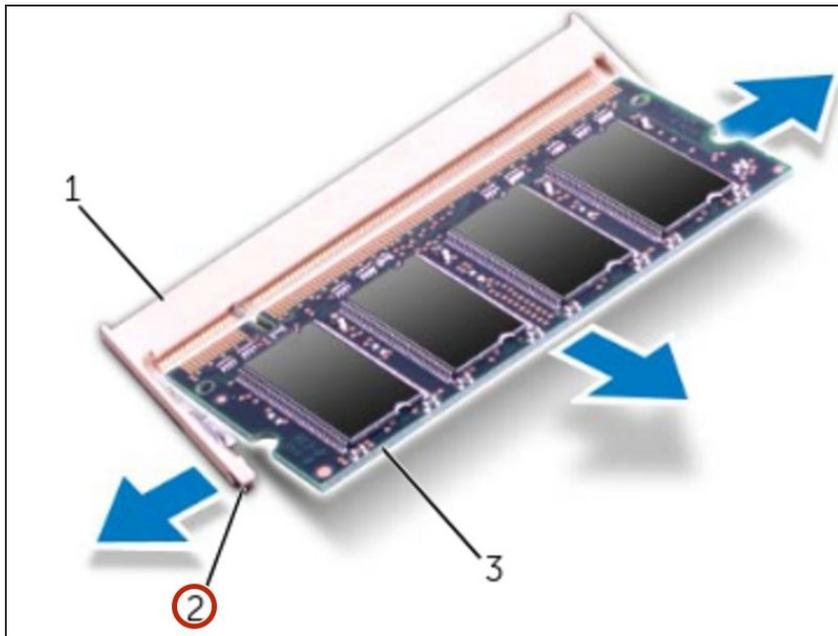


**⚠ WARNING:** Before working inside your computer, read the safety information that shipped with your computer and follow the steps in ["Before You Begin"](#).

**⚠ CAUTION:** To prevent damage to the memory-module connector, do not use tools to spread the memory-module securing clips.


- Close the display and turn the computer over.
- Use your fingertips to carefully spread apart the securing clips on each end of the memory-module connector until the memory module pops up.

## Step 2 — Removing the Memory Module

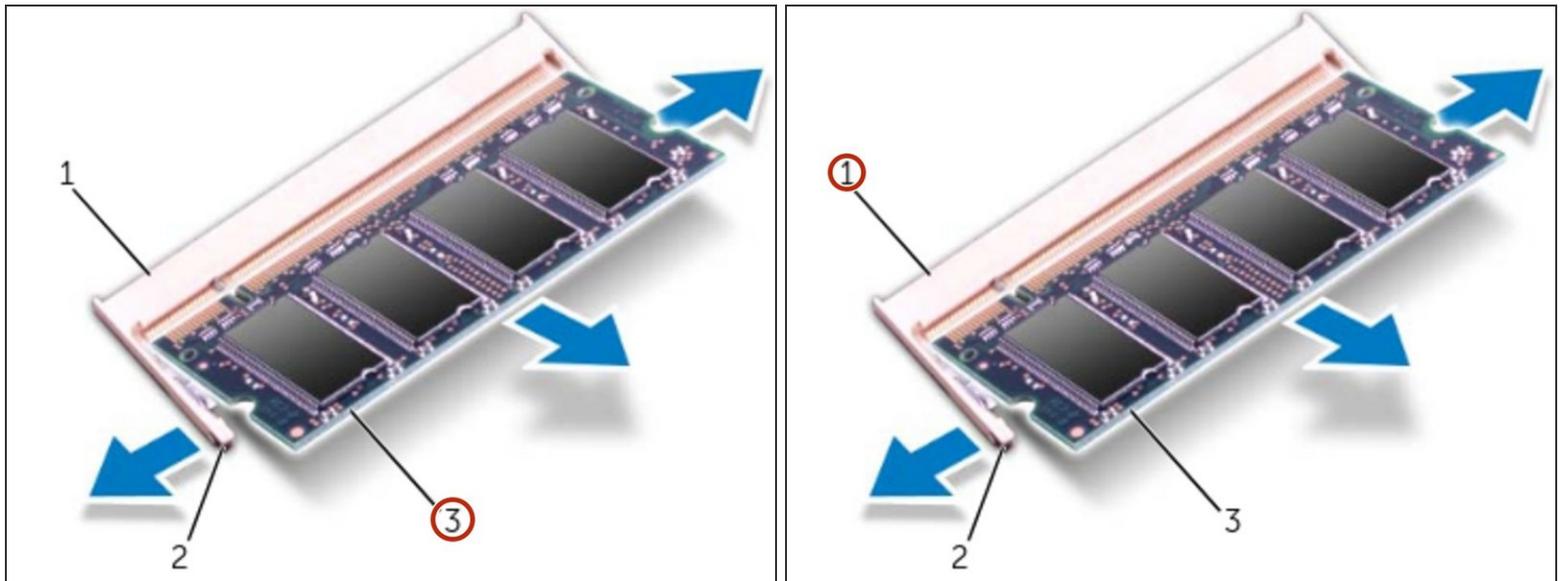

- Remove the memory module from the memory-module connector.


## Step 3 — Align the Notch

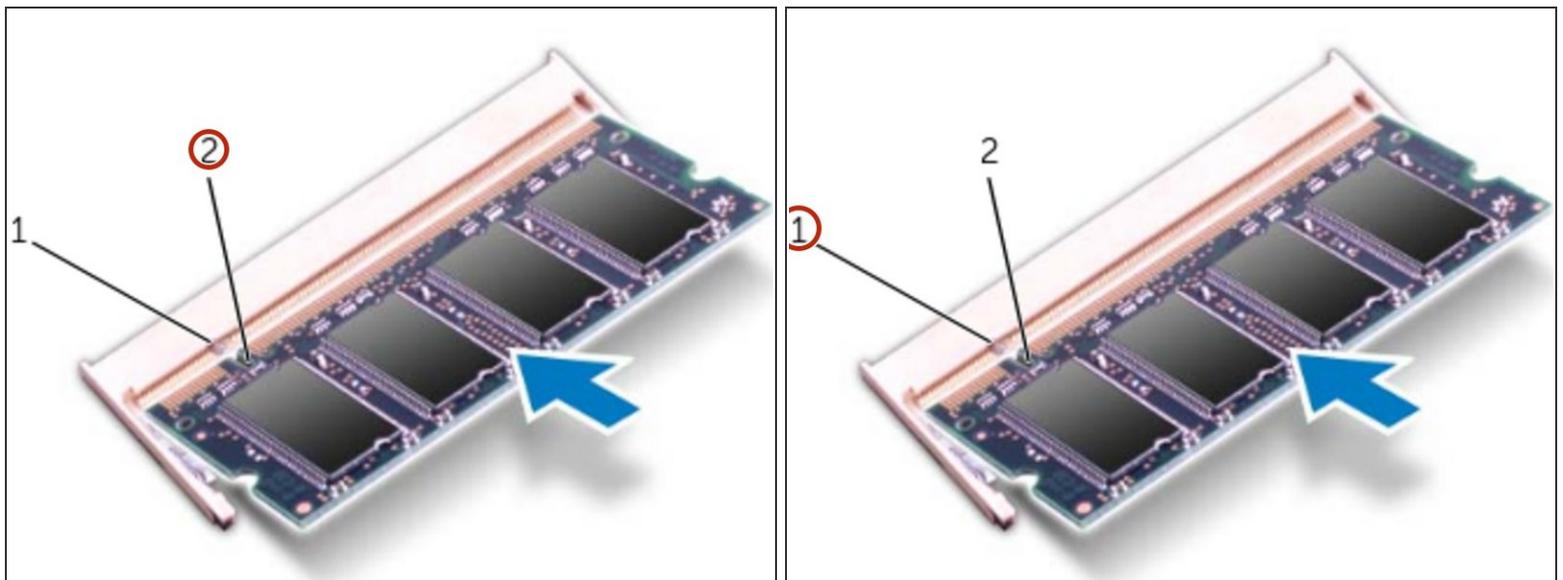

**⚠ CAUTION:** If you need to install memory modules in two connectors, install a memory module in the connector labeled "DIMM A" before you install a memory module in the connector labeled "DIMM B."

- Align the notch on the memory module with the tab on the memory-module connector.

## Step 4 — Installing the Memory Module

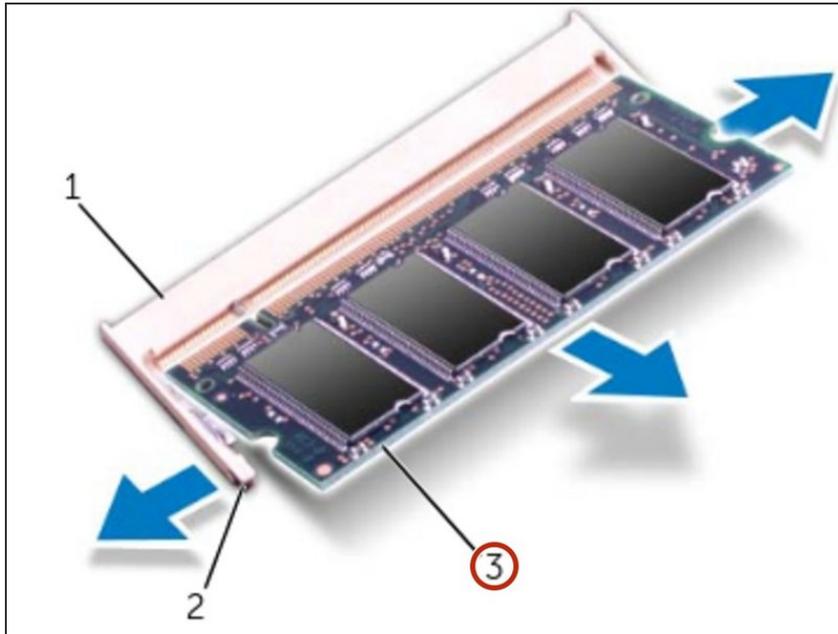

- Slide the memory module firmly into the connector at a 45-degree angle, and press the memory module down until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.

ⓘ NOTE: If the memory module is not installed properly, the computer may not boot.

To reassemble your device, follow these instructions in reverse order.