



# Microsoft Lumia 640 LTE Motherboard Replacement

This guide is used for replacing the...

Written By: Nick Emmert



# INTRODUCTION

This guide is used for replacing the motherboard on the device . This makes the device to work at faster speeds.

---

## TOOLS:

[T4 Torx Screwdriver](#) (1)

[Tweezers](#) (1)

[iFixit Opening Tool](#) (1)

[Fingers](#) (1)

[Spudger](#) (1)


---

## Step 1 — Back Cover




- Use your thumb or fingernail on the edge/corner of the phone to pry the back cover off the phone.

## Step 2 — Screen

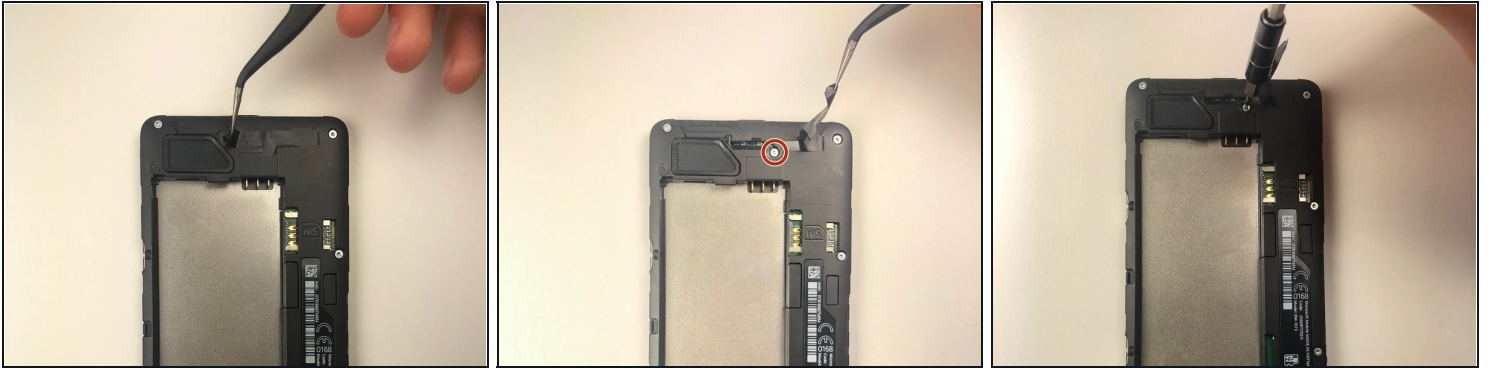


- Use the [tweezers](#) to pull back the sticker, revealing the screw underneath.  
⚠ Be careful when removing the screws as they can strip easily.

## Step 3

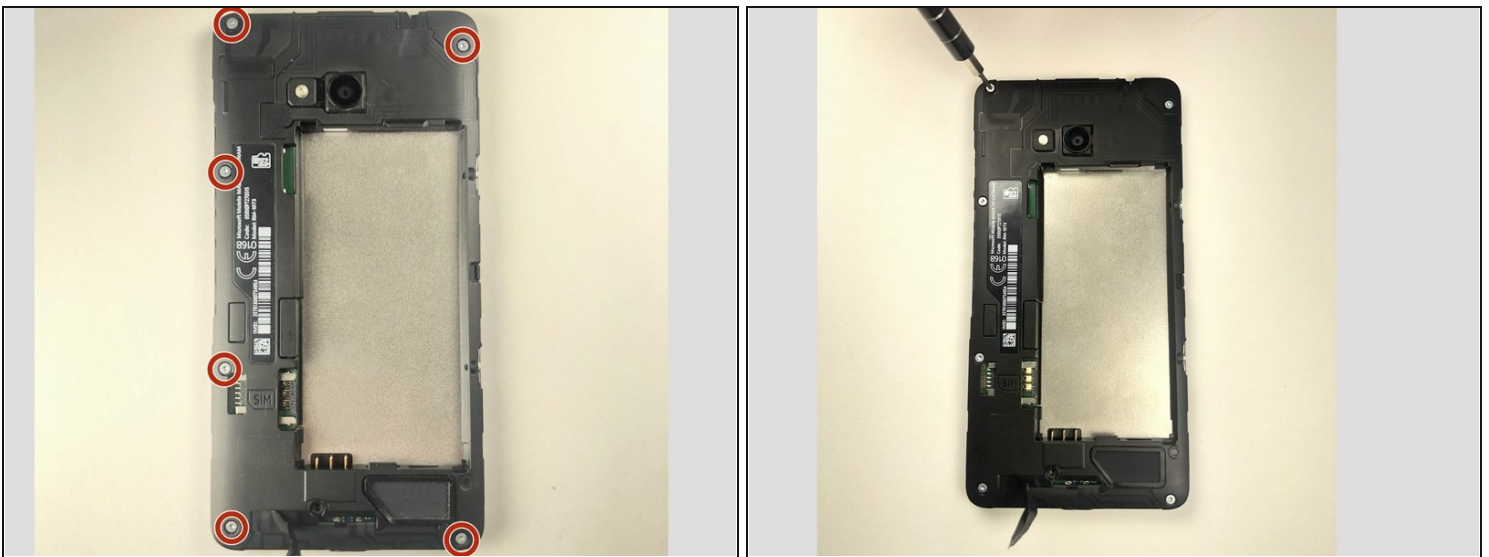


- Use a T4 Torx driver to remove the screws in the four corners, along with the two in the middle left side (six total).

## Step 4

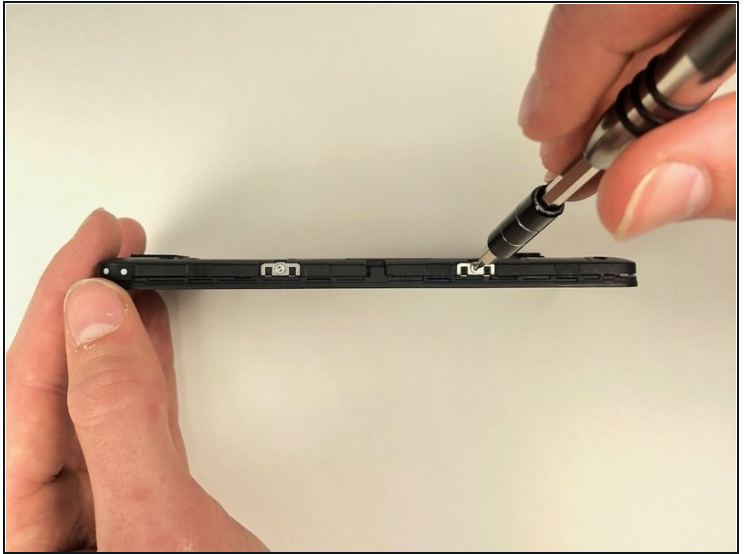

- Using the T4 Torx driver, unscrew the two screws.
- ☑ Keep these screws separate from the screws from back of the phone to ensure that the right screws go where they belong.

## Step 5

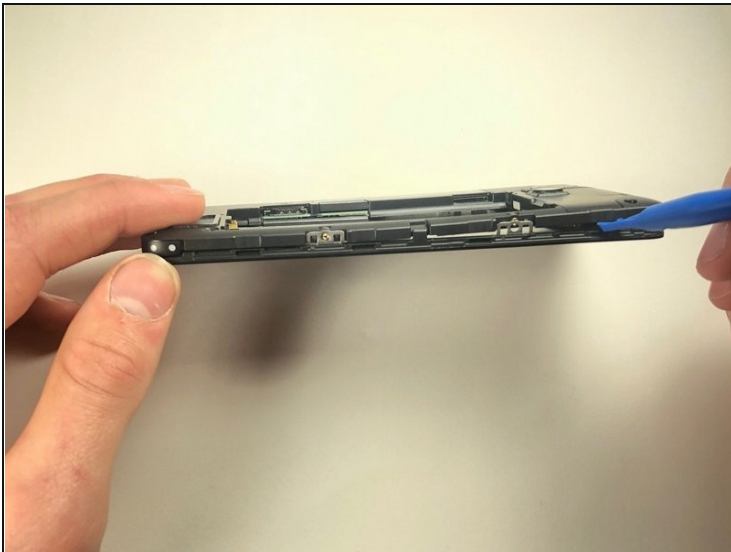




- Use a plastic opening tool to separate the screen from the back plastic casing
- Use tweezers to release the clip on the side of device, and remove the back of the phone.

## Step 6




- Using the tweezers or a spudger, pull the gold tab up gently.
  - Using tweezers or a spudger, lift the white connector up gently to completely detach the screen from the phone.
- ⓘ **For motherboard replacement, skip to Step 11 after finishing this step.**

## Step 7

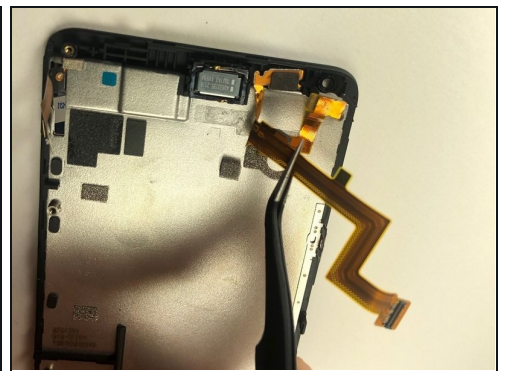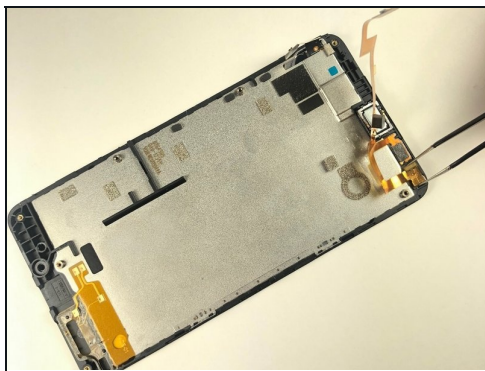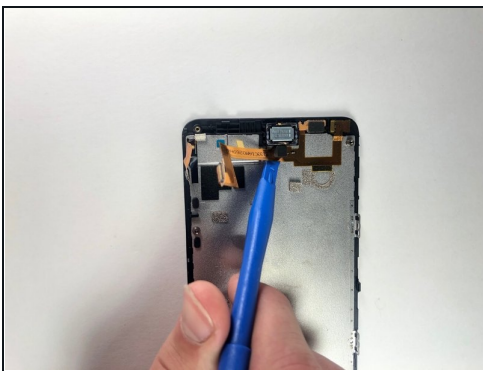


- Using a plastic opening tool to carefully get under the gold strip.
  - Use tweezers to pull up the camera.
  - Use tweezers to pull up on the depth sensor.
- ⓘ This is held in by a strong adhesive.

## Step 8

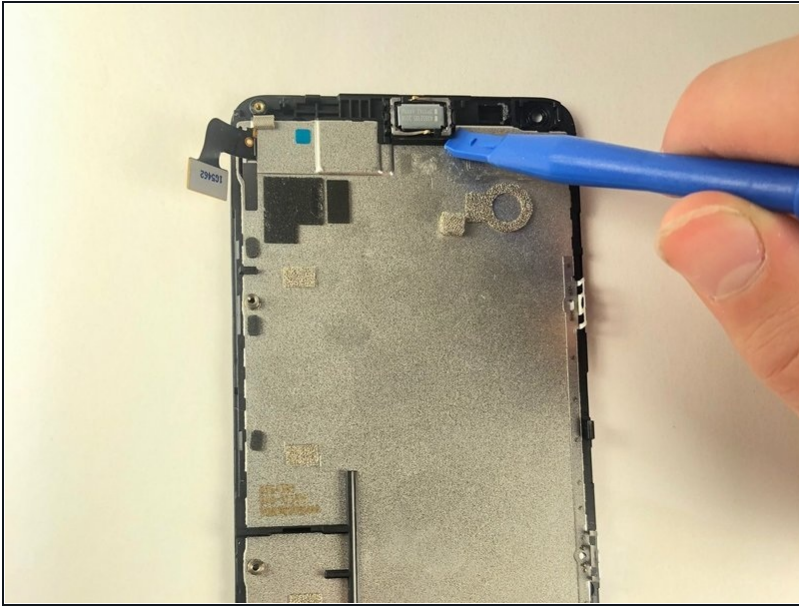


- Use a plastic opening tool to pry up the ear speaker.
  - ① This is held in by strong adhesive.

## Step 9 — Headphone Jack

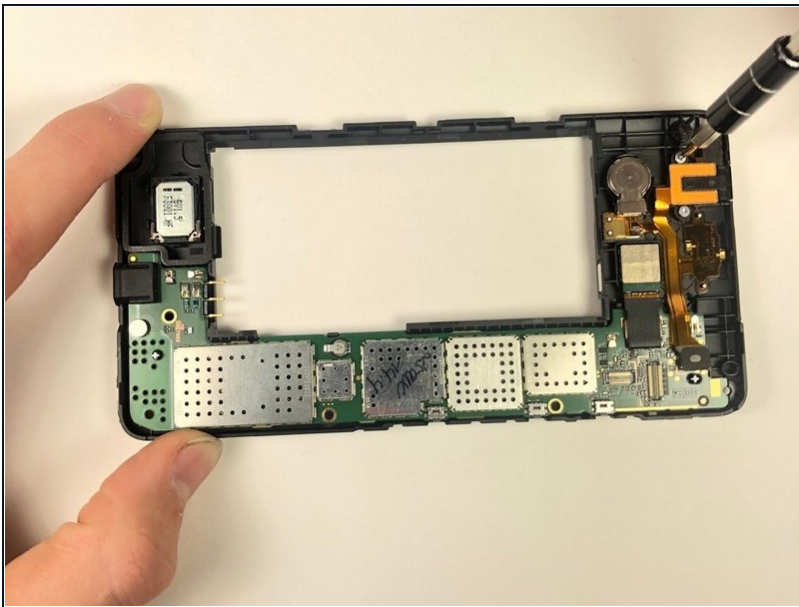




- Unscrew the 2 remaining screws with the T-4 bit.

## Step 10

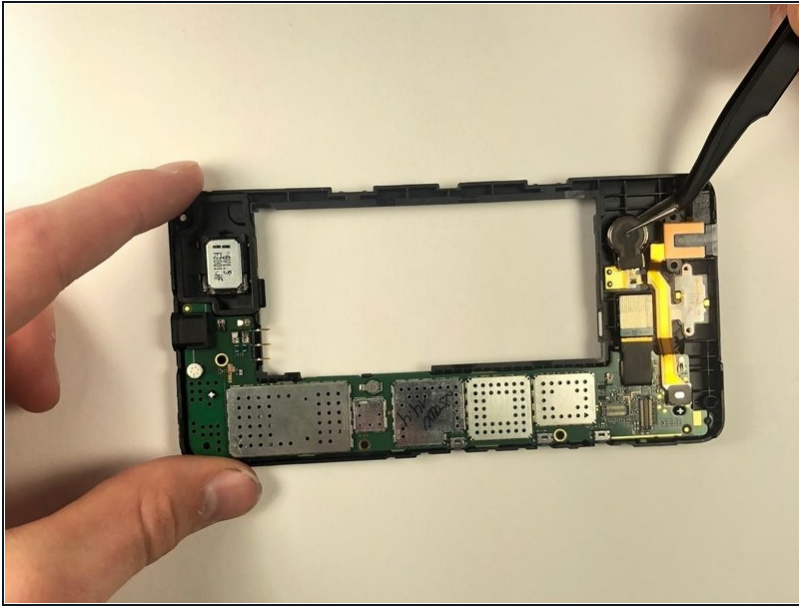


- Use the [tweezers](#) to remove the speaker.

## Step 11

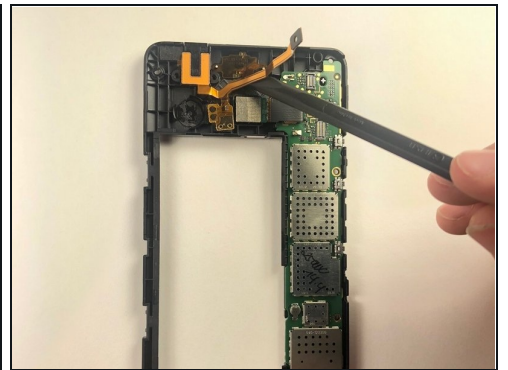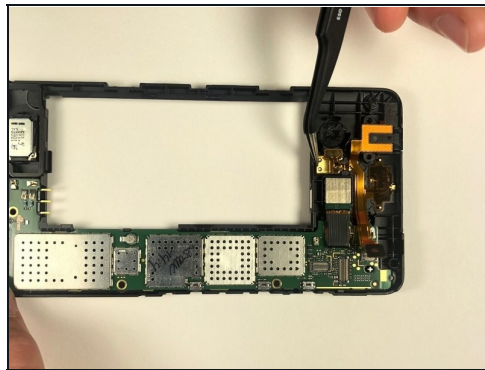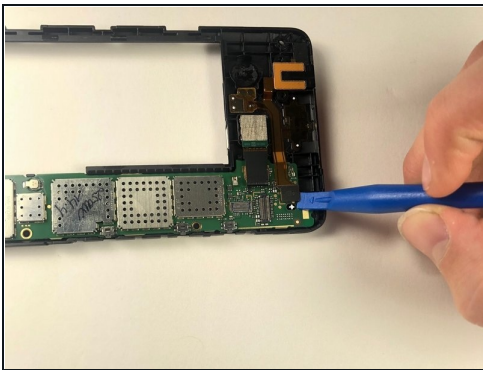


- Use the plastic opening tool to lift up the black tab.
- Use the tweezers to gently pull up on the gold tab.
- Using the spudger, slowly get underneath the gold sticker and pry it up. This sticker is held down with a strong adhesive.

## Step 12

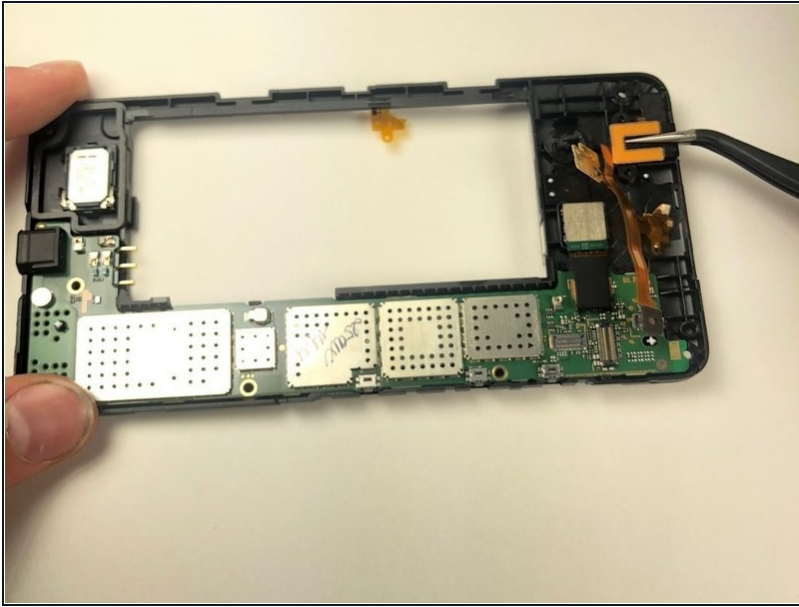

- Use the tweezers to remove the orange insulator foam.

## Step 13 — Motherboard

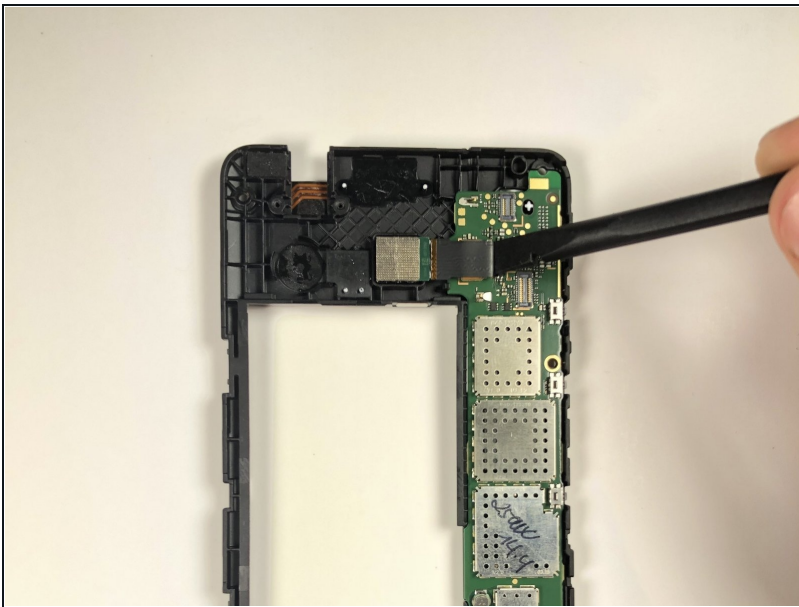


- Using the pry tool lift up on the black tab

## Step 14



- Using the spudger, press out the motherboard.

## Step 15

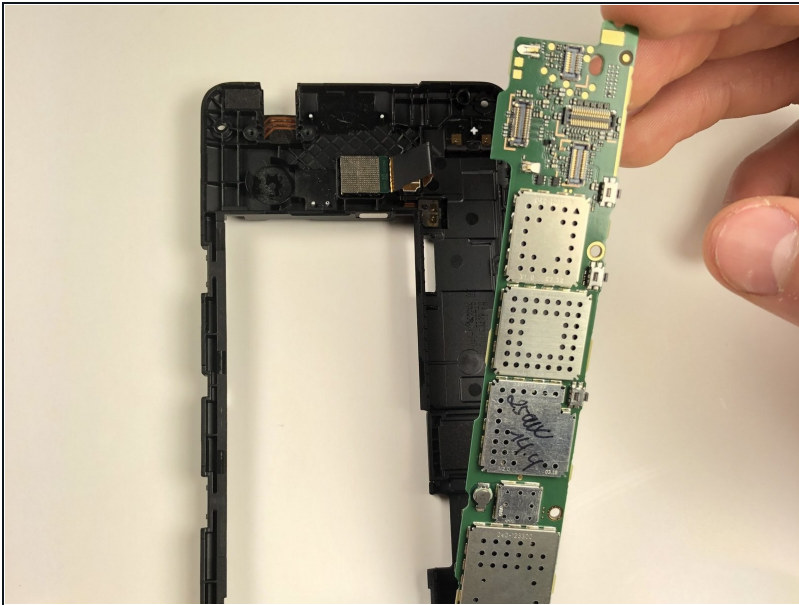

- Gently wiggle out the motherboard.

---

To reassemble your device, follow these instructions in reverse order.