



HTC 7 Surround Camera Replacement

How to replace an HTC Surround camera.

Written By: Michael Ronning






TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Case

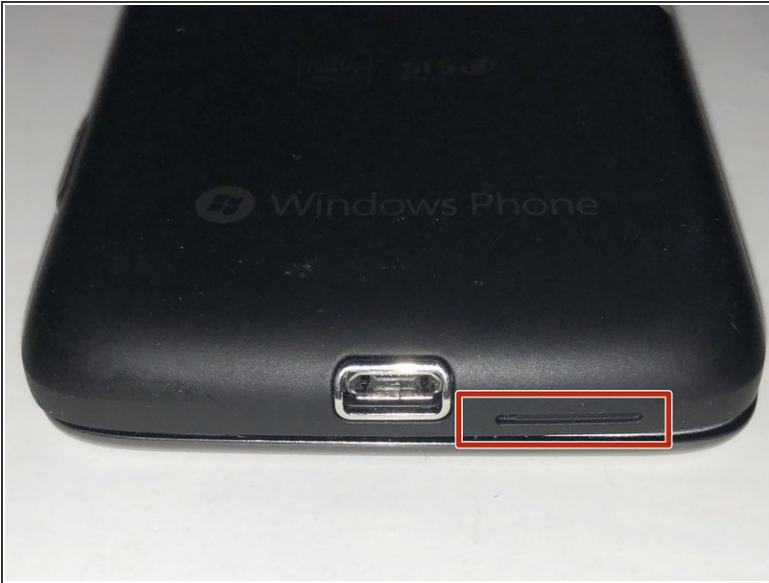

- Remove the back cover of the device to access the internal components of the HTC 7 Surround.
- To remove the back cover, use the circular hole to lift up the cover while holding the front of the device down.

Step 2




- Using a Phillips #00 screwdriver, remove the screws as directed.

Step 3



- Separate the screen and back cover with the opening tool.

Step 4 — Rear Camera

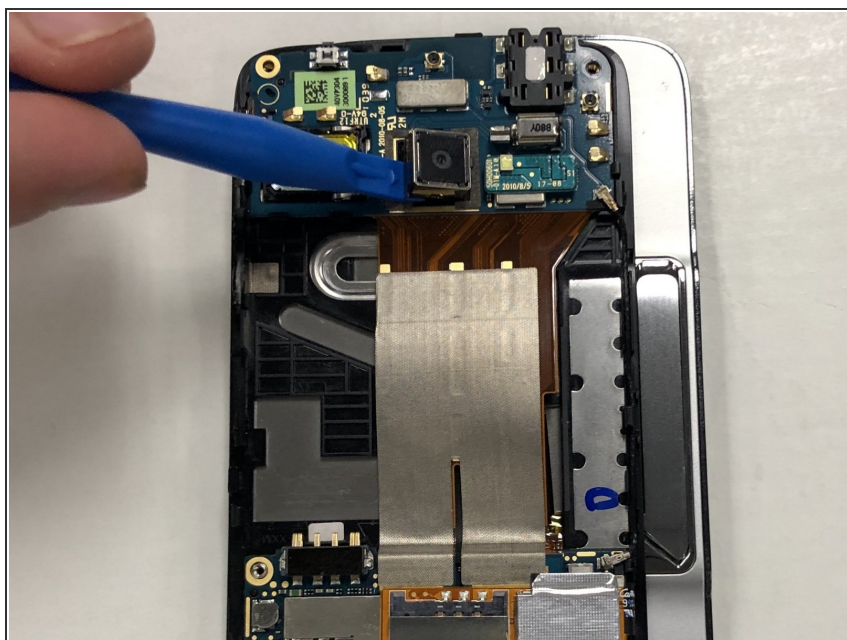

- The camera is attached to the device by a sticky double-sided piece of tape. Insert the plastic

opening tool under each side of the camera until it is removed from the tape.

- The camera lens should then come off after enough force is applied, and room will be made for the replacement to be inserted.
-

To reassemble your device, follow these instructions in reverse order.