




# Vulcan Venture II VNB14002IE Speaker Replacement

Written By: Parish Brandt

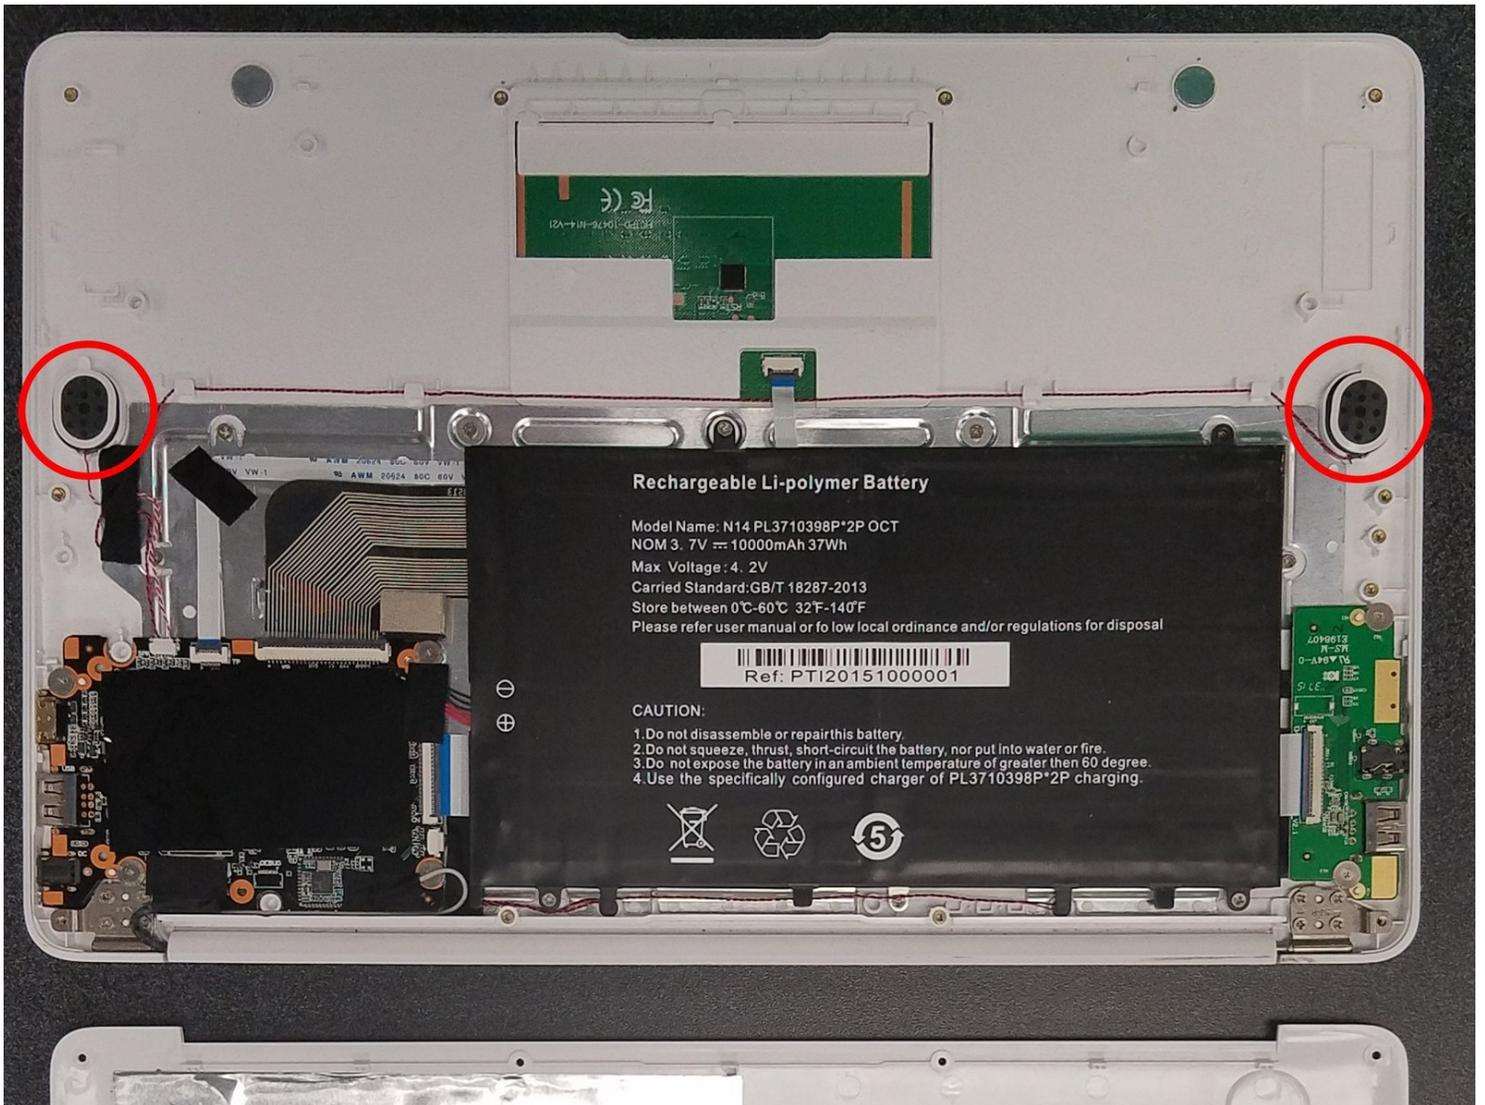

---

 **TOOLS:**

JIS #00 Screwdriver (1)  
iFixit Opening Tool (1)


---

## Step 1 — Back Panel




- Use a J00 screwdriver to unscrew the 10 back-plate screws.

## Step 2

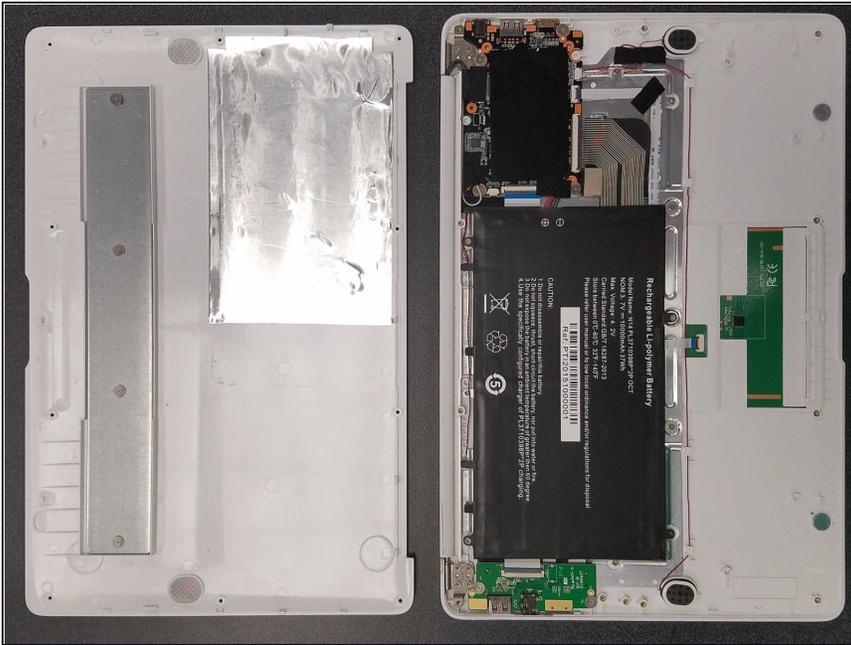


- Gently separate the back panel from the laptop.

## Step 3 — Speaker

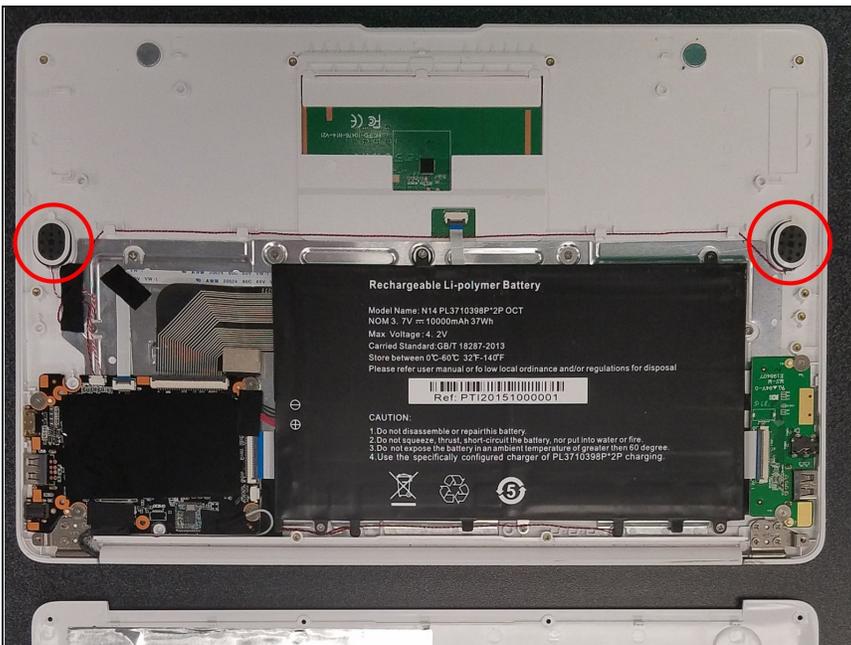

- Locate the speaker modules on the back of the laptop.
- Gently pry the speakers out of the plastic casing using your finger or the blue plastic pry tool.

## Step 4

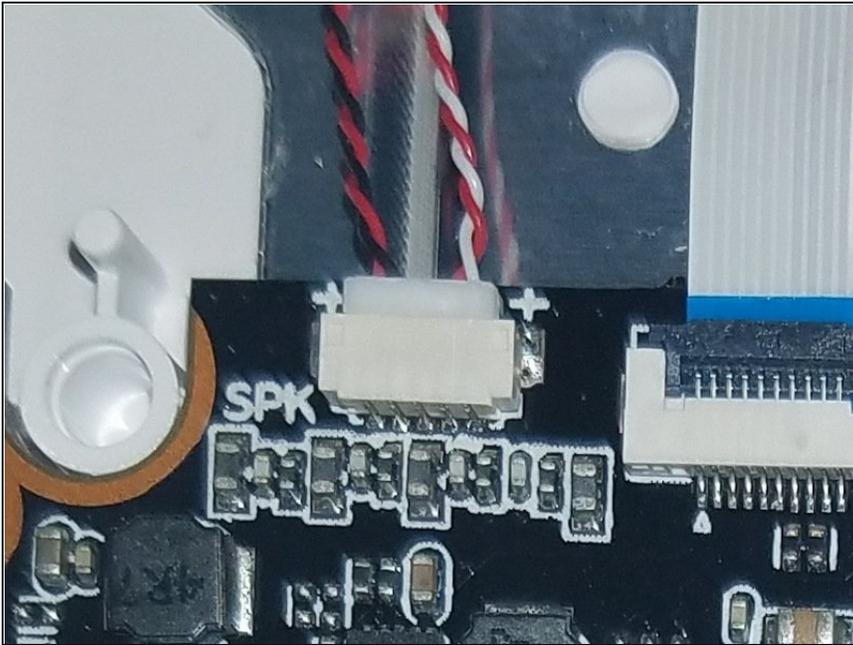

- Gently pull out the speaker wire connector from the motherboard.

## Step 5



- Unwrap the wires from their holders and remove the speaker modules.
- ☑ When re-inserting the speakers, make sure the wires are correctly wrapped around the plastic holders, and that the speaker wire goes underneath the touch pad connector wire, as it was before.

To reassemble your device, follow these instructions in reverse order.

