



Escort Passport 9500IX Display Replacement

How to replace a Escort Passport 9500IX display.

Written By: Jiahao Xu



INTRODUCTION

Is your radar's display not powering on or just hangs on a black screen? If this is the case, then the display could be at fault. Follow this guide to replace the display on your radar.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Back Panel





- Remove the three 1.2 mm Phillips #1 screws on the back of the device.

Step 2






- Pry off the back panel of the radar using the nylon spudger.

Step 3 — Display

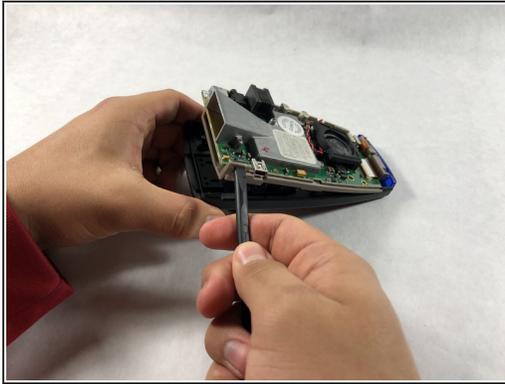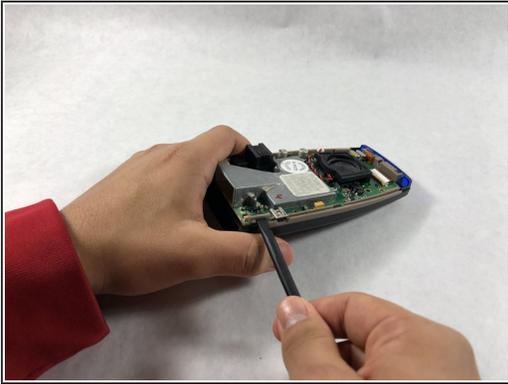



- Carefully pry the grey frame off the black plastic covering using the nylon spudger.

Step 4

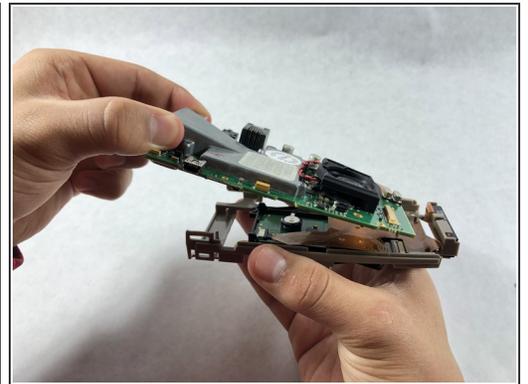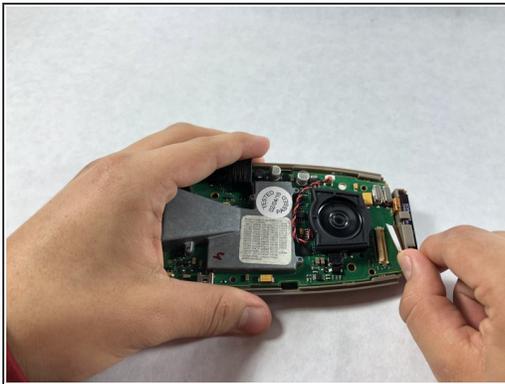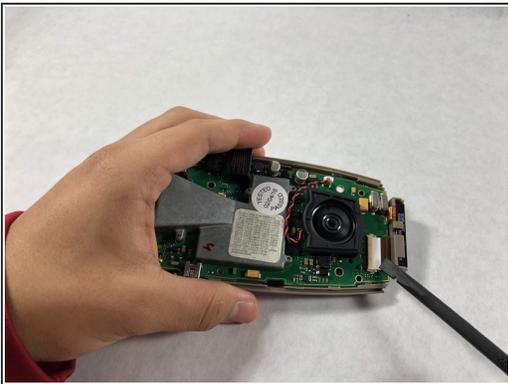



- Detach the orange flap from the motherboard using a nylon spudger.
- Carefully remove the motherboard from the grey plastic frame.

Step 5

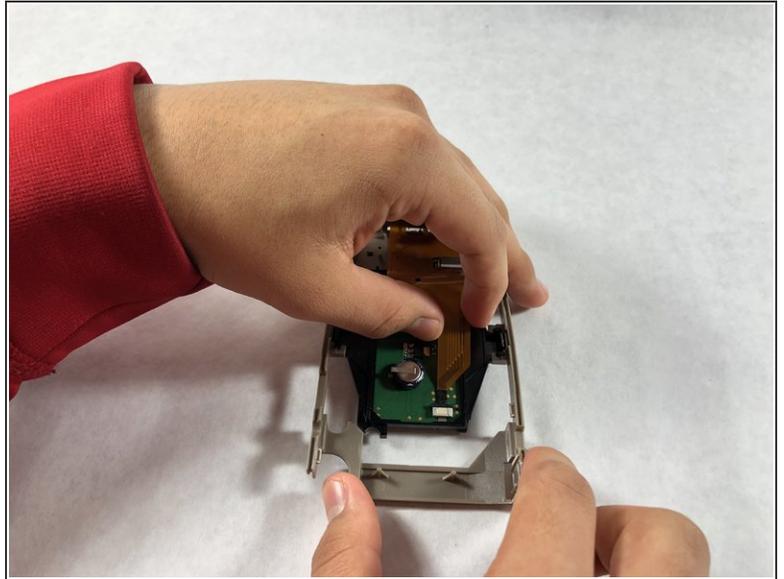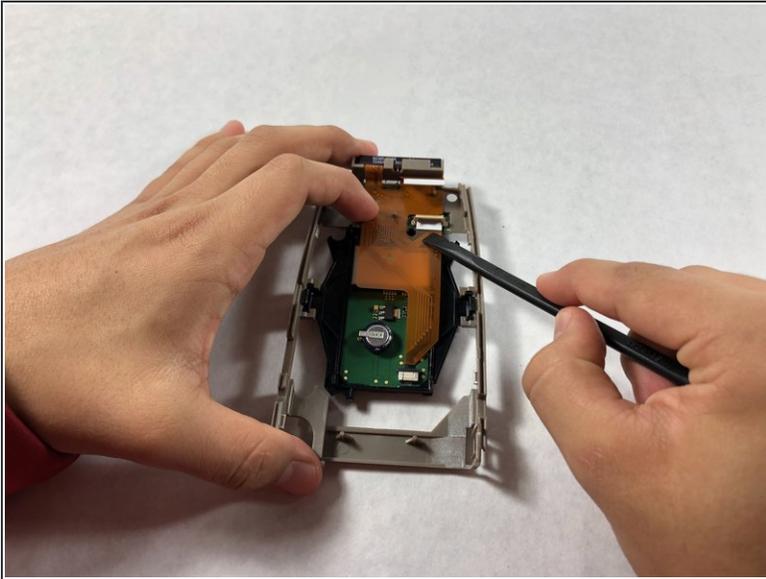

- Detach the remaining two orange flaps from the circuit board that is attached onto the grey frame.

Step 6

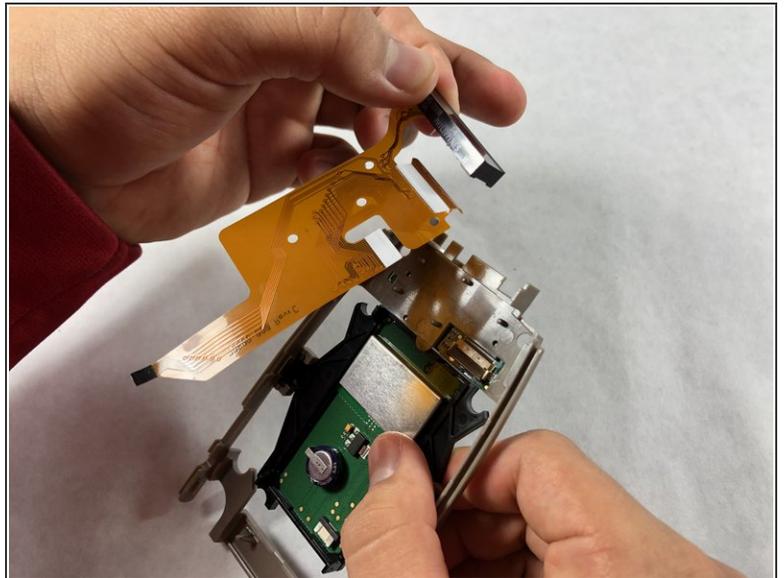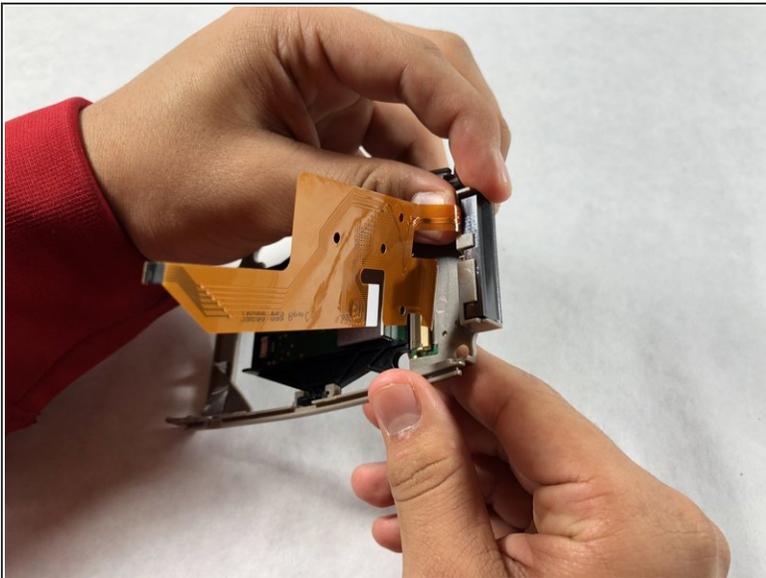

- Detach the display from the grey frame.

To reassemble your device, follow these instructions in reverse order.