




Samsung Mythic SGH-a897 Speaker Replacement

This guide will show you how to replace a...

Written By: Morgan Yost

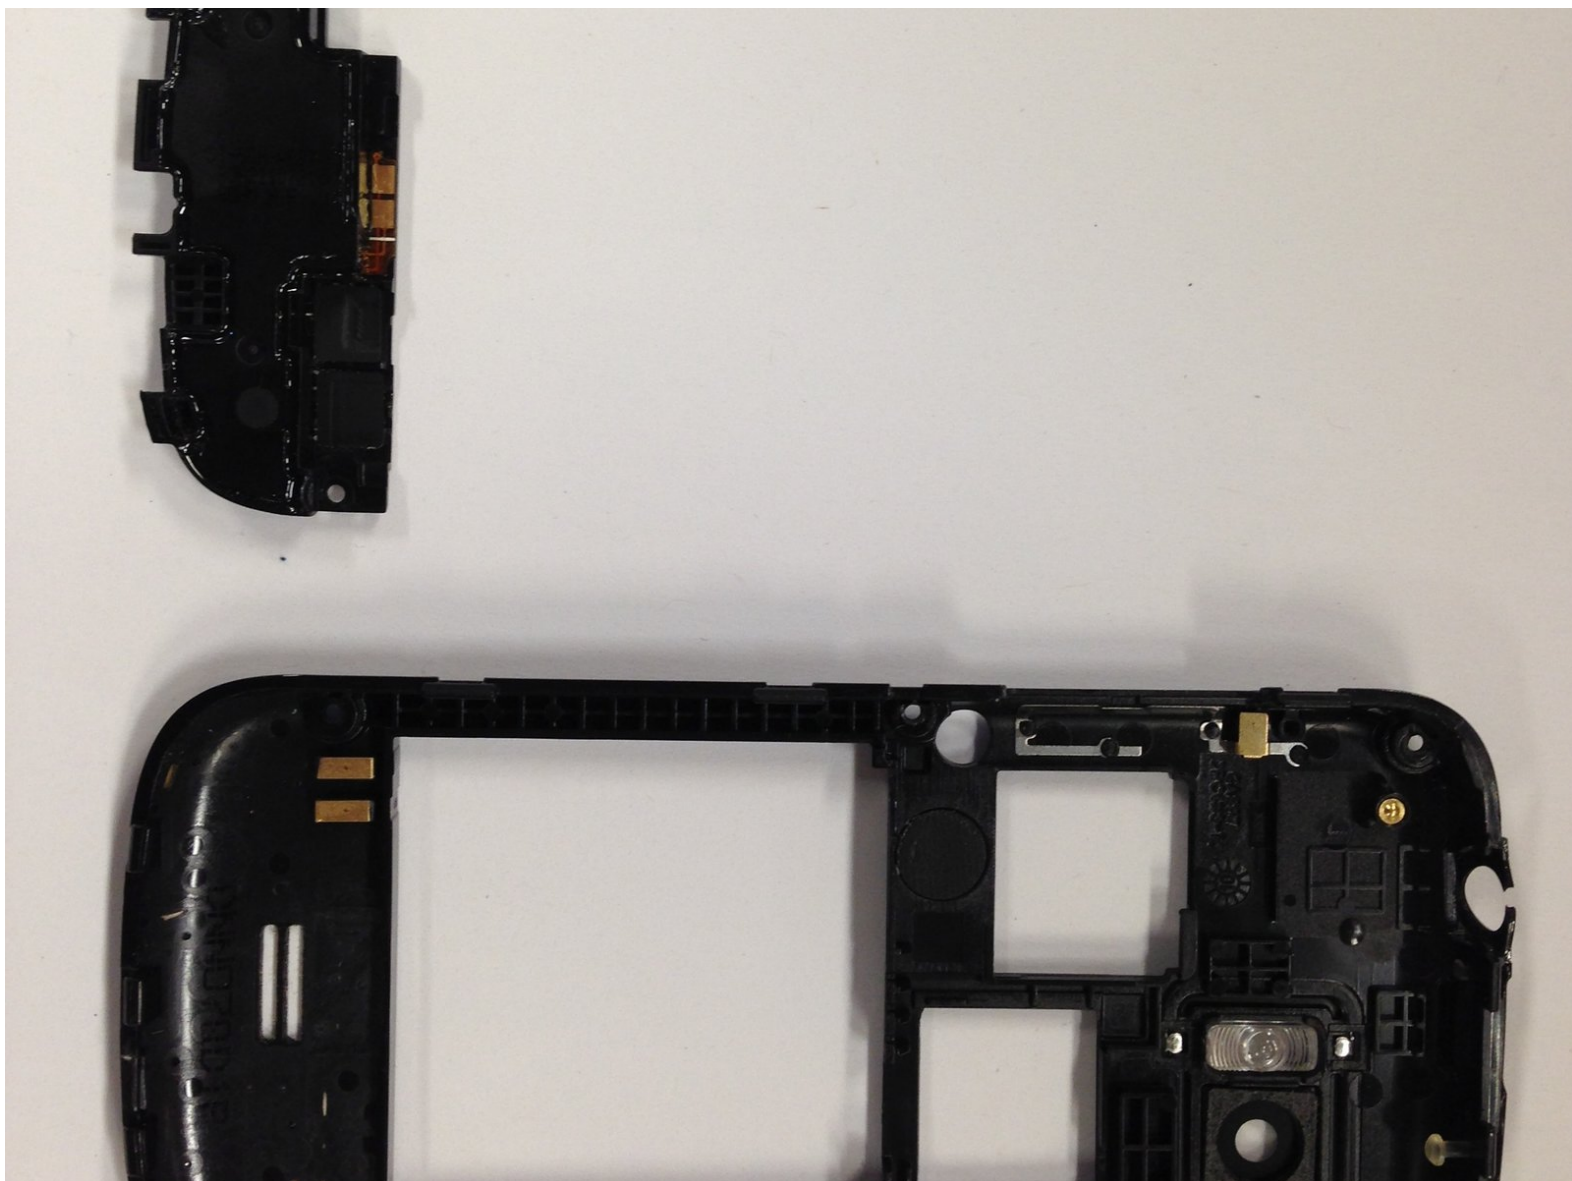

INTRODUCTION

This guide will show you how to replace a faulty speaker.



TOOLS:

- [iFixit Opening Tool](#) (1)
-

Step 1 — Battery



- To remove the phone's back cover, slide your fingernail into the slit at the bottom of your phone.

Step 2



- Place your finger on either bottom corner of the battery slot and lift to remove the battery.

Step 3 — Rear Case




- Using a Phillips #00 Screwdriver, remove the six 5 mm screws from the back casing of the phone.

Step 4



- Using the iFixit Opening Tool, insert the tool into the seam between the back case and the rest of the phone.
- Working along the seam, pry the back casing from the phone.

Step 5 — Speaker

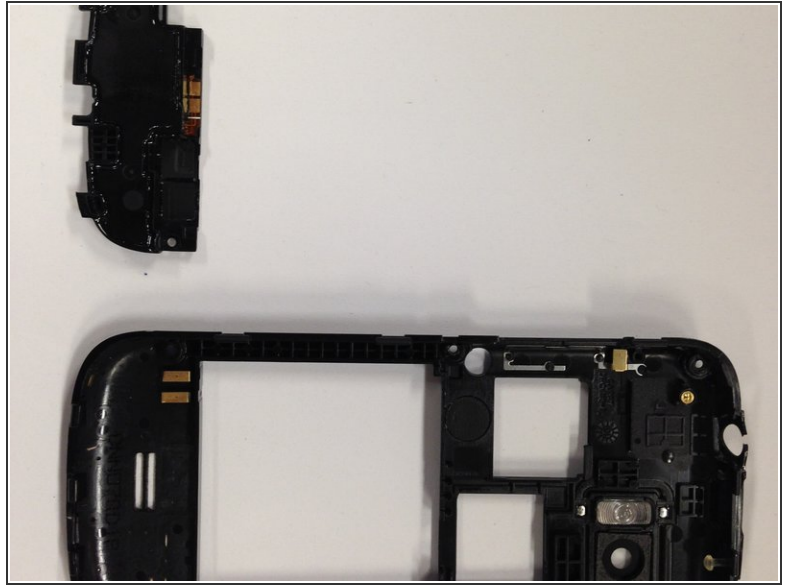

- Find the back casing of the phone. Slide the plastic opening tool under the bottom of the speaker to pop it out.

To reassemble your device, follow these instructions in reverse order.