




Samsung Galaxy A10 Charging Port Replacement

Samsung A10, A10s Micro USB Charging connector...

Written By: ZFix

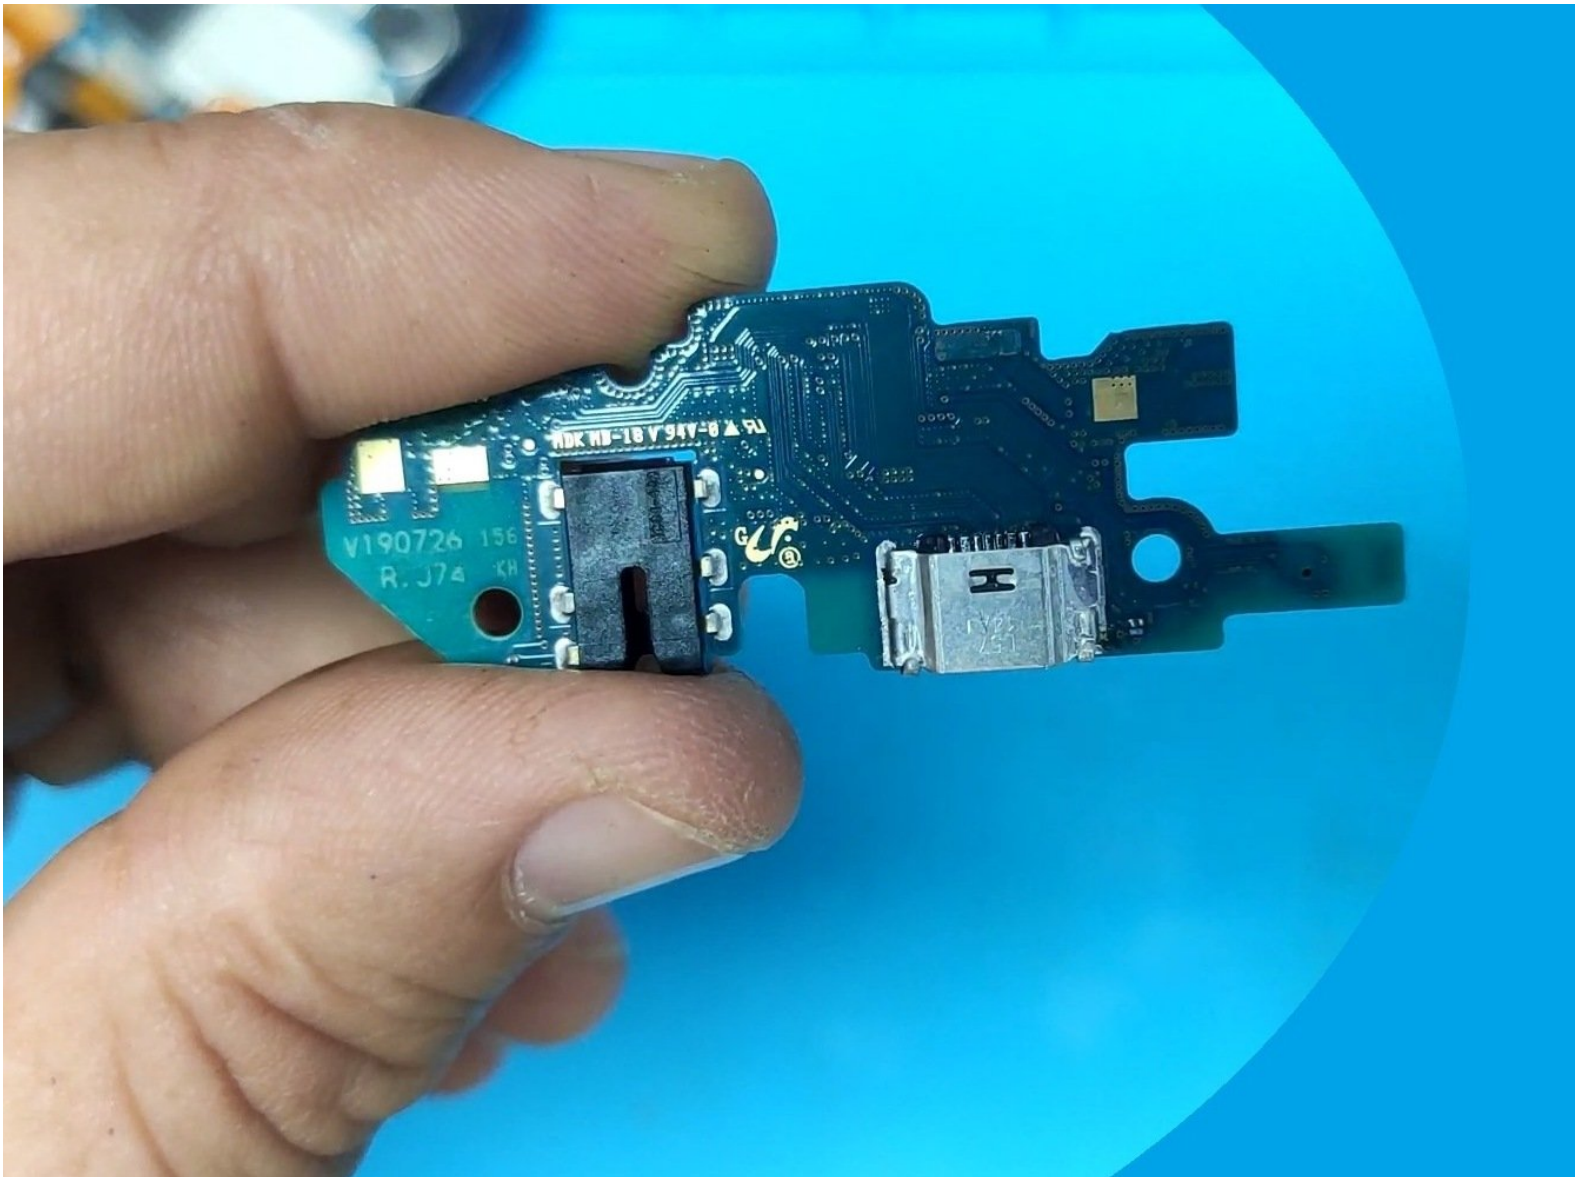


INTRODUCTION

Samsung A10, A10s Micro USB Charging connector Replacement


[video: https://youtu.be/BgN_dT4cud4]

Step 1 — Remove the back cover

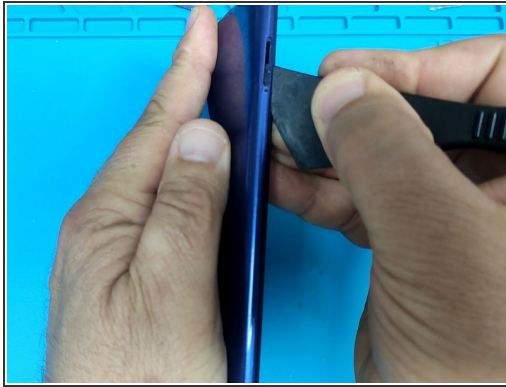


- Remove the SIM Tray.
- Use plastic tools to separate the back cover.

Step 2

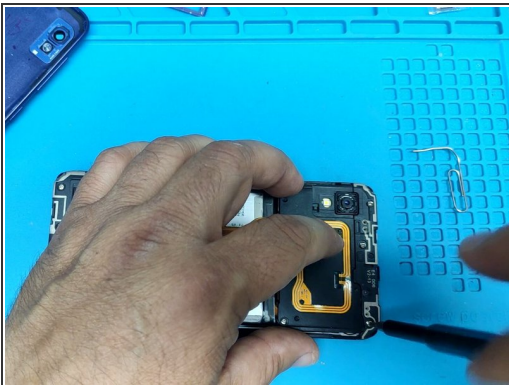


- Remove the silver Phillips screws to be able to disassemble the motherboard shields.

Step 3

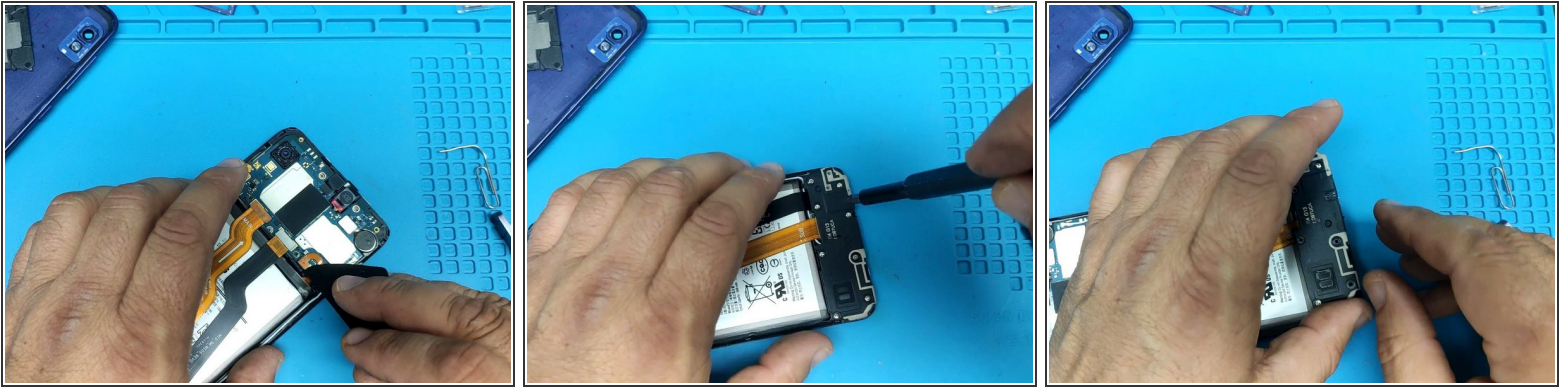


- Disconnect the battery.
- Remove the screws and the charging board shield.

Step 4 — Remove the charging board

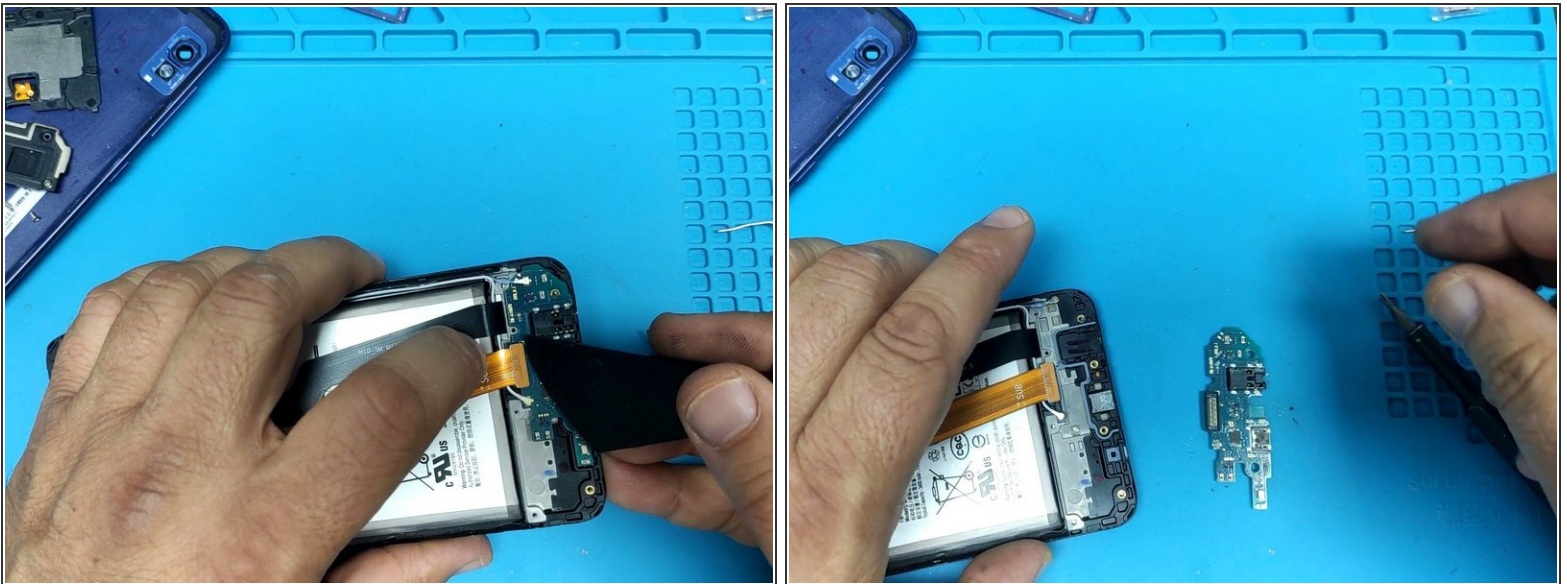


- Disconnect the Main flex cable and the coaxial antenna cables and remove the charging board.

Step 5

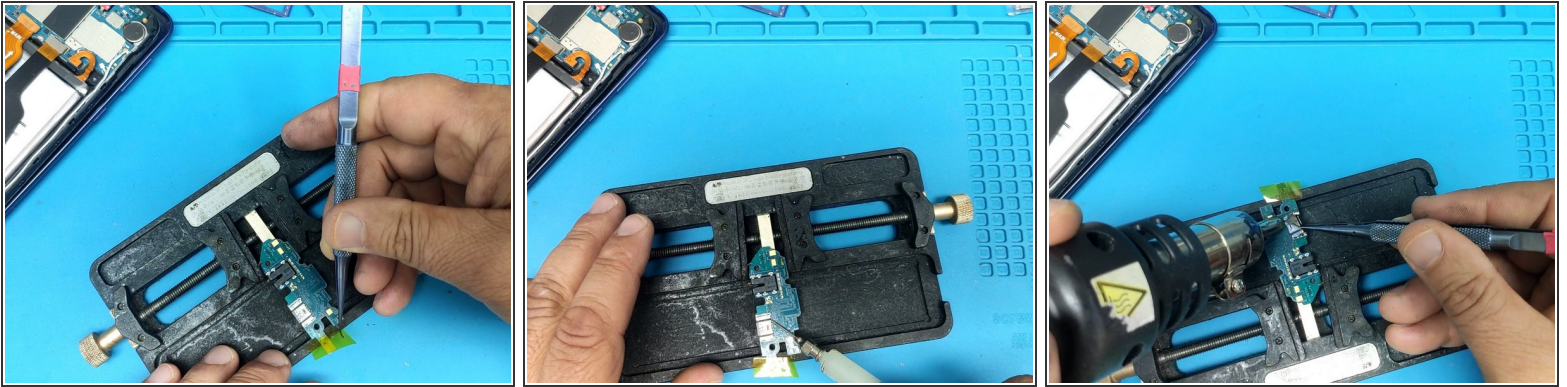


- Cover the microphone hole to prevent microphone damage.
- Use hot air to remove the Micro USB connector.

Step 6

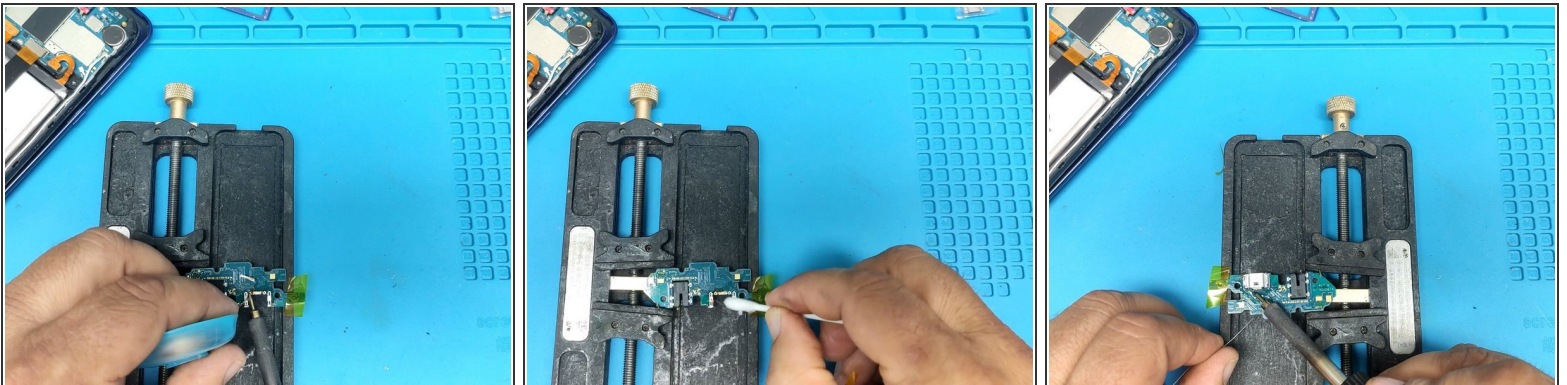

- Clean the tin and install the new charging connector.

Step 7

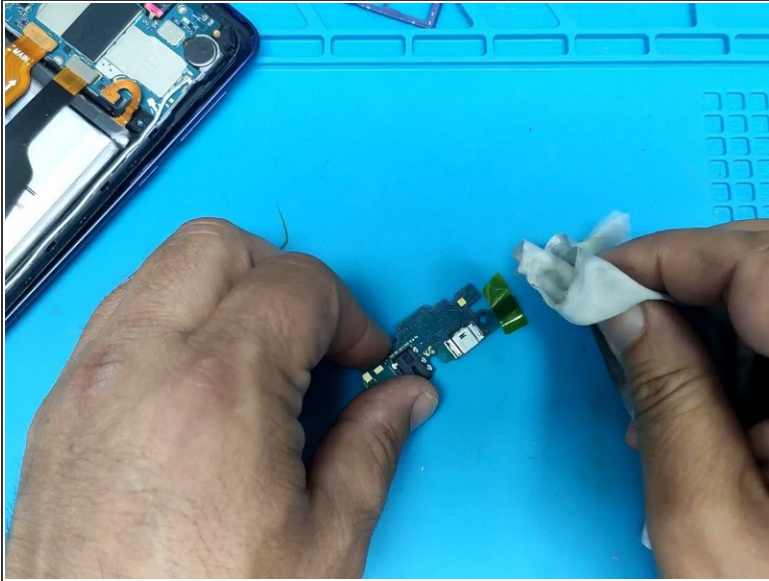

- Clean the board and test the device.

To reassemble your device, follow these instructions in reverse order.