




2011 Mazda 3 Car Speaker Replacement

A guide on how to replace the OEM door speaker in your 2011 Mazda 3.

Written By: Erika Sheffield

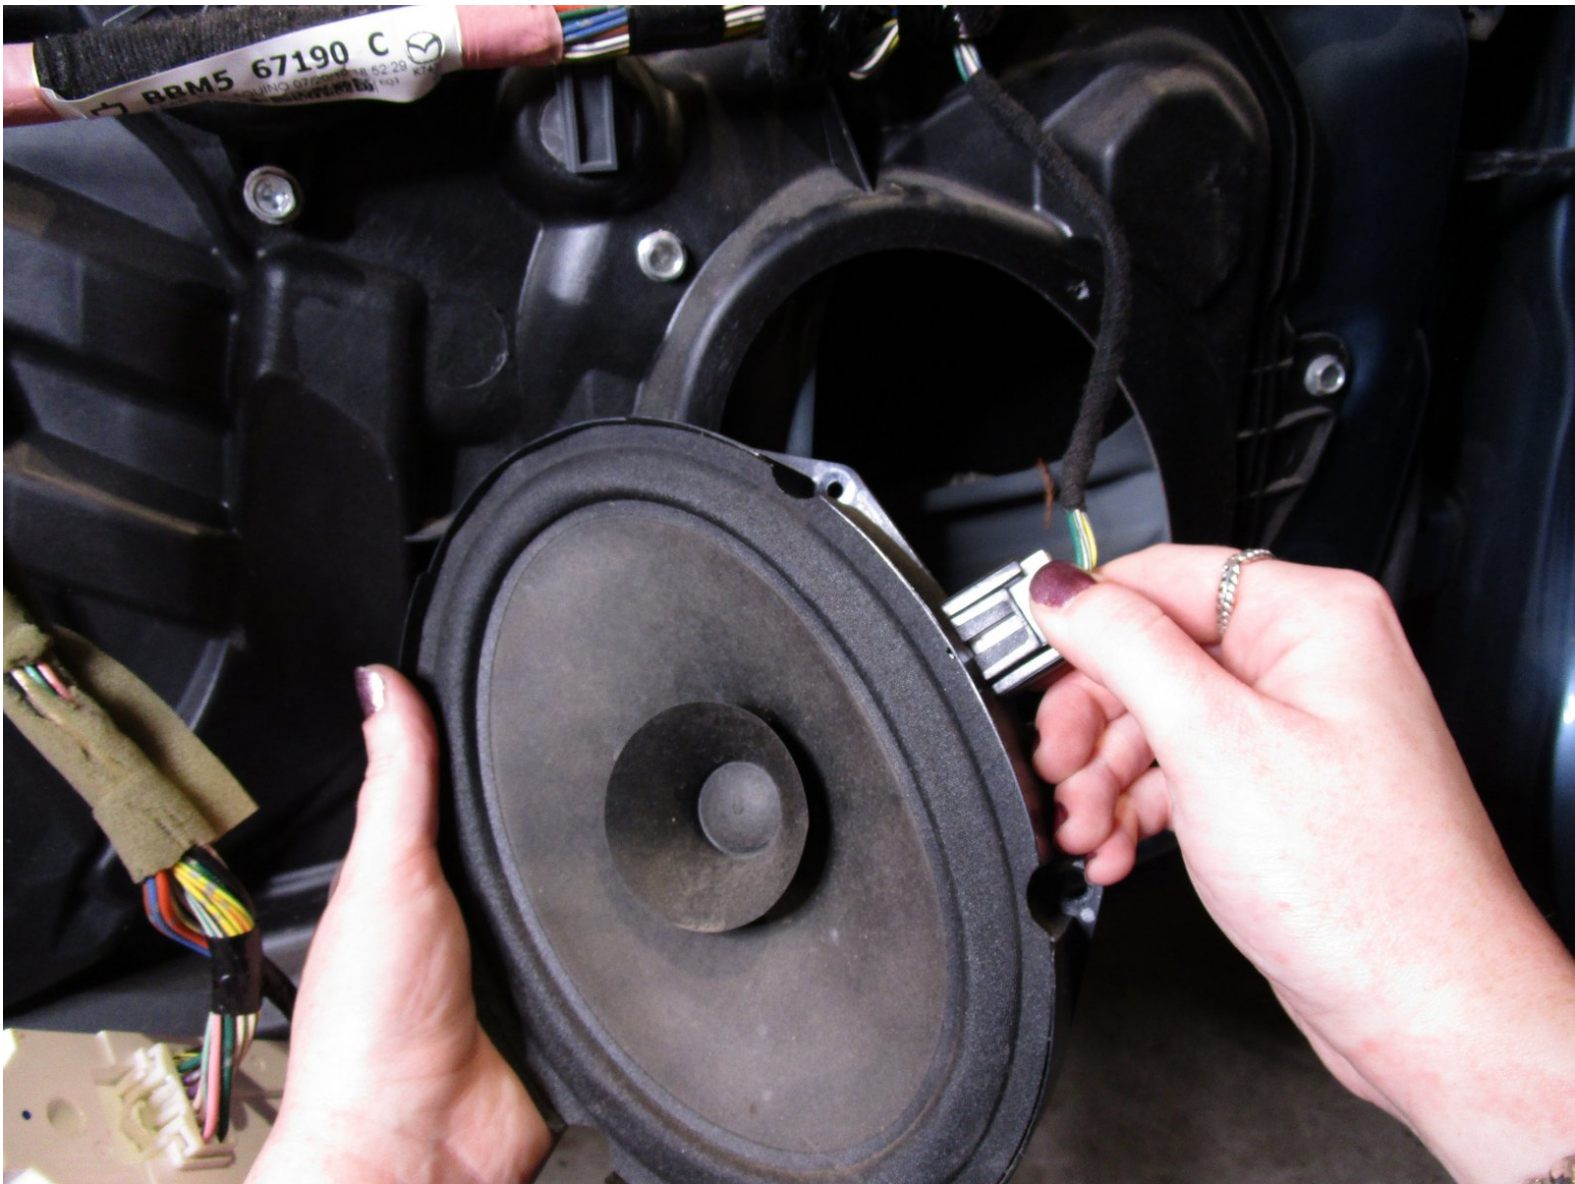

INTRODUCTION

This guide is for base model Mazda 3 owners who need to replace their factory OEM door speakers.

Perform this repair while the car is off.

The speaker in this guide is a component speaker, so they do not require any wire cutting or soldering.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
- [Heavy-Duty Spudger](#) (1)
- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)



PARTS:

- [6x8 2" Car Speaker](#) (1)

Step 1 — 2011 Mazda 3 Car Speaker



- Pry the door handle cover upwards using a flathead screwdriver.
- Remove the cover to expose the screw.

Step 2



- Pull the door handle towards you.
- Insert a small flathead screwdriver between the lock and the plate.
- Pry the plate off by applying leverage away from the lock, exposing the second screw.

Step 3




- Remove both screws with a Phillips #1 screwdriver.
- ⓘ The screws are 12mm Phillip's head. Part number (9986-50-516S).

Step 4



- Pry the door cover away from the frame using a heavy-duty spudger.
- ⓘ The door cover will not be removed entirely in this step.
- ⓘ Prying the door off takes substantial force; moving around the door's perimeter will help unhook the clips that line the panel.

Step 5

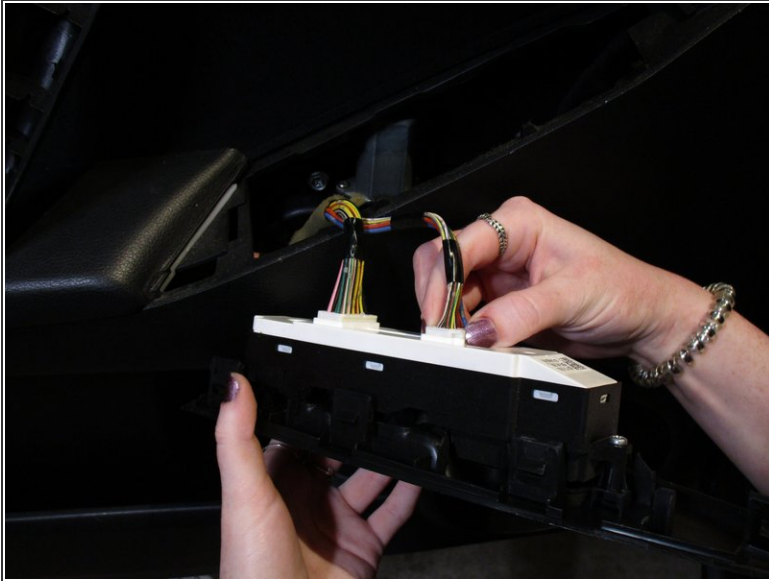


- Push the switch panel out from the inside of the door cover.

 **Ensure the car is off before proceeding.**


- Remove the wires connected to the panel by pressing the clips and pulling them outward.
- Remove the door cover.

Step 6

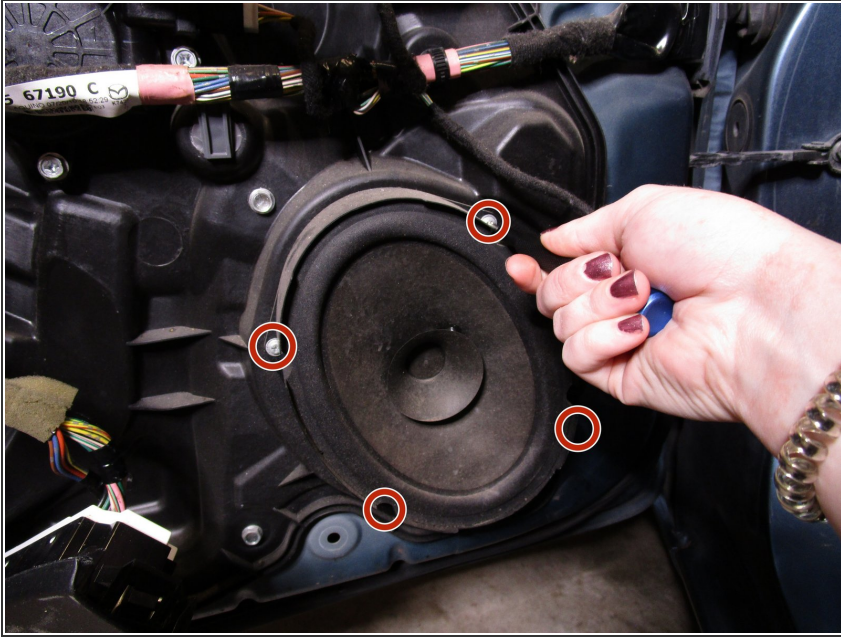

- Use a Phillips #1 screwdriver to remove the four screws that secure the door speaker.
- ❗ The screws are 10mm Phillip's head. Part number (9984-50-616).

Step 7

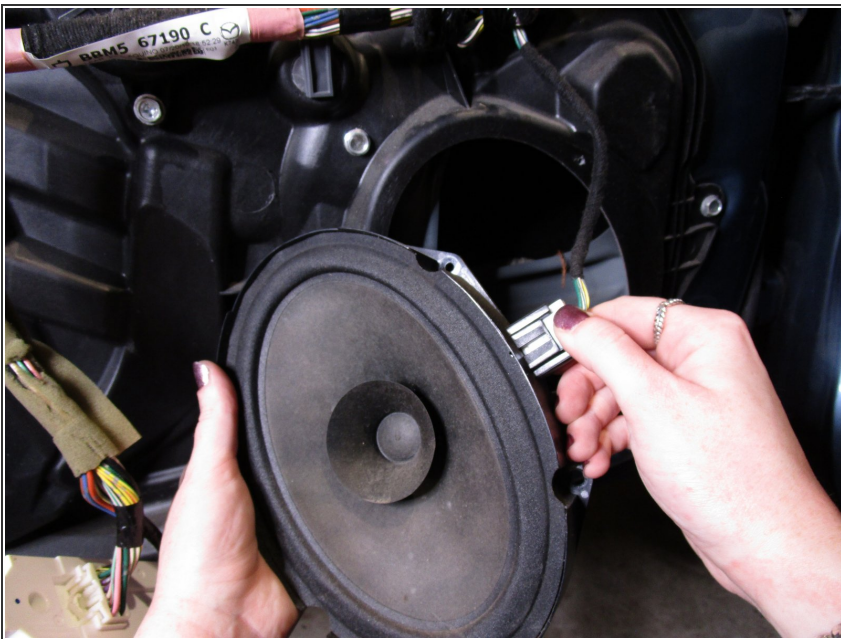

- Remove the wires connecting the speaker by pressing the clip and pulling it outward.

To reassemble your device, follow these instructions in reverse order.