




BlackBerry 8700c Replacing Logic Board Replacement

Written By: arlebrun

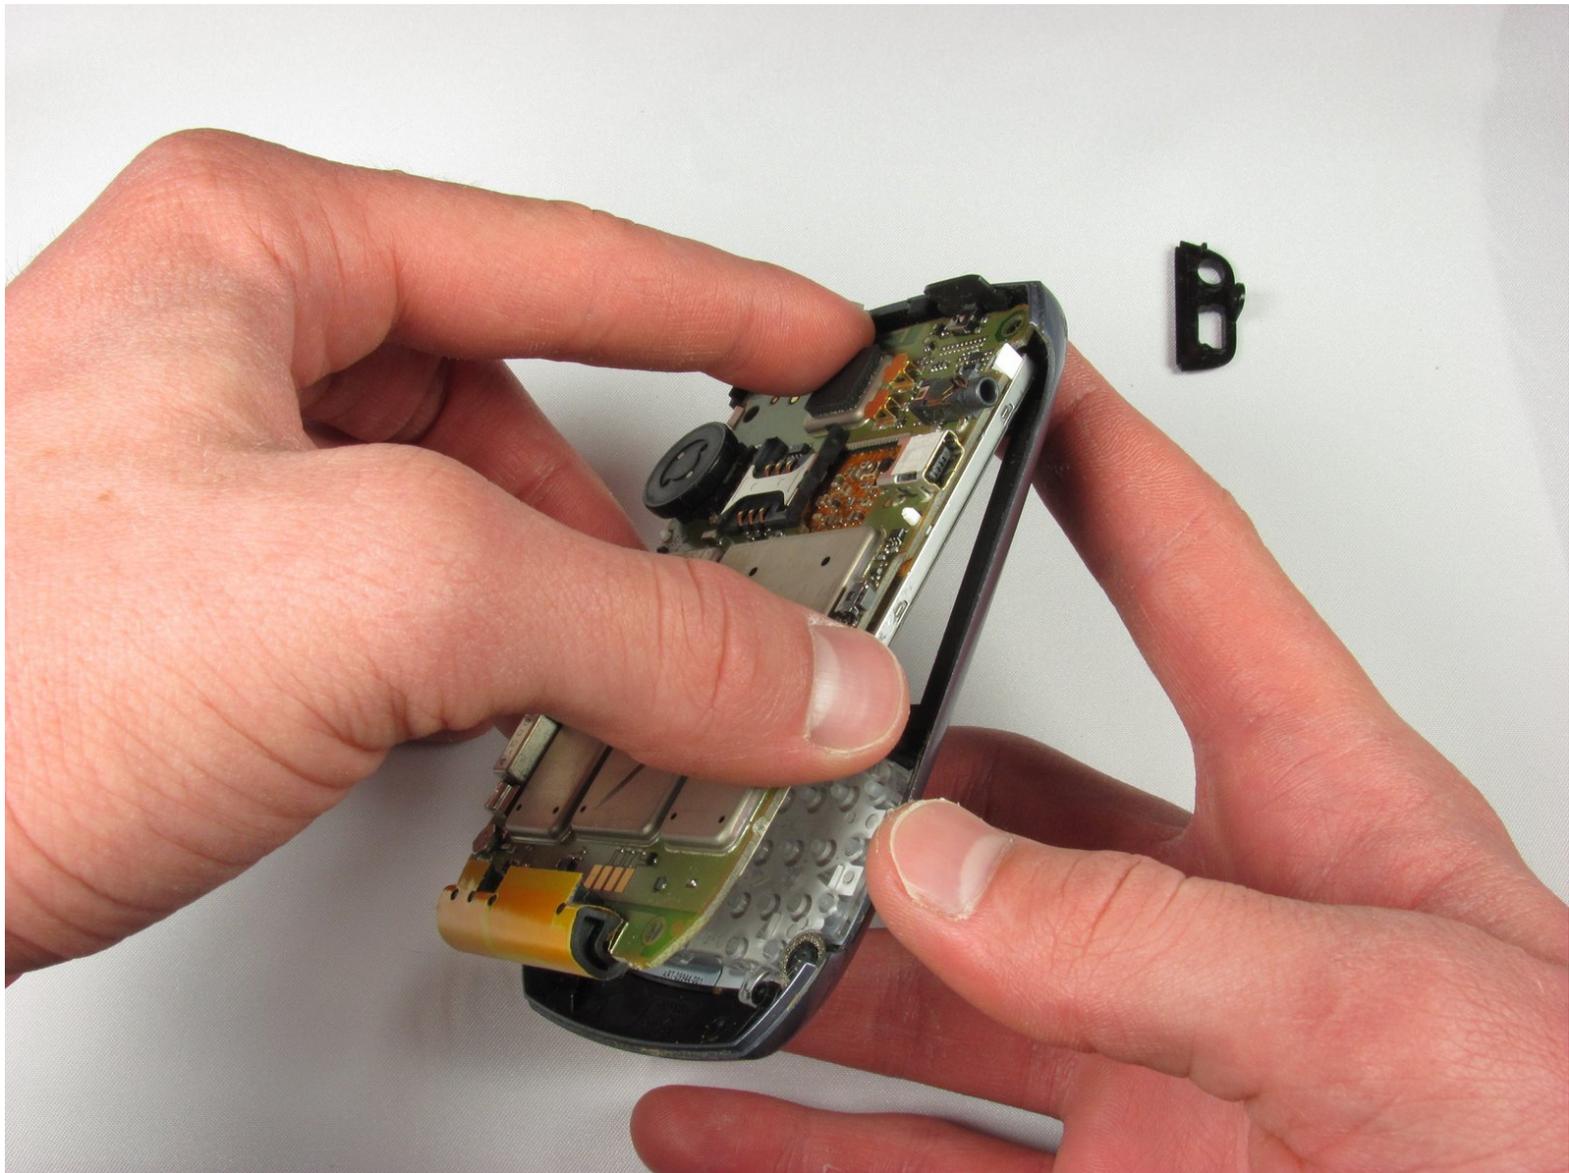

INTRODUCTION

This Repair guide will walk you through the steps on how to replace a RIM Blackberry 8700c logic board.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Replacing Logic Board



- Remove the back cover by pushing down on the button and sliding the cover towards the bottom of the phone.
- Set the cover aside. The battery will now be exposed.

Step 2



- Remove the battery by pulling back on the notch on top edge of the battery.
- Set the battery aside.

Step 3



- Unscrew and remove all four T6 Torx screws.

Step 4




- Pull the back cover of the phone off and set it aside.

Step 5



- Unscrew and remove all 4 T6 Torx screws.

Step 6

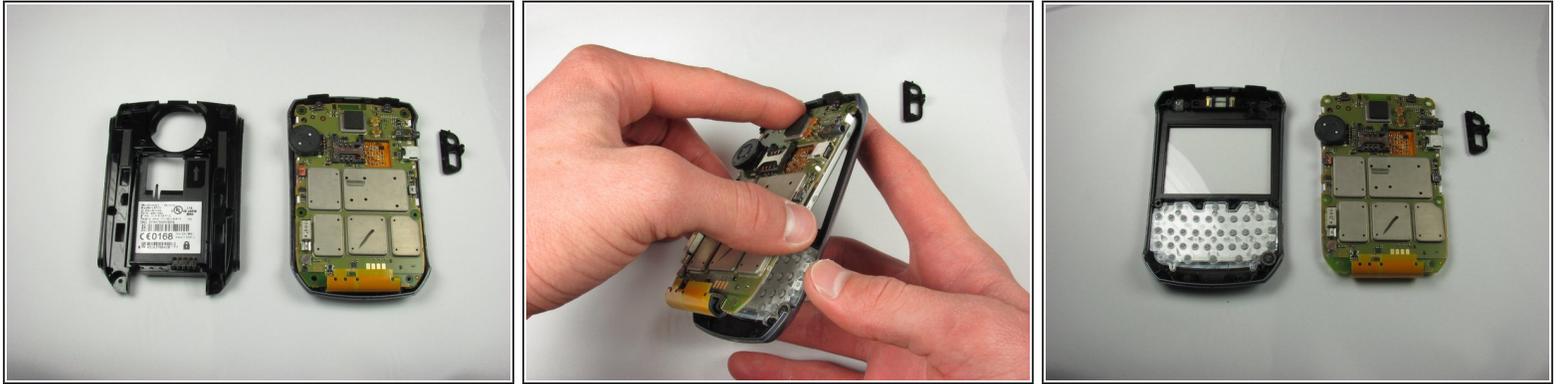

- Lift and remove inner back cover and set aside.
 - ☑ A small side piece may fall away but is simple to reattach.
- Remove logic board by gently lifting it off of the front cover of the phone.
 - New logic board can now simply be set in place.

To reassemble your device, follow these instructions in reverse order.