




Motorola Razr V3c Screen (CDMA) Replacement

Written By: Joshua Ruehlig

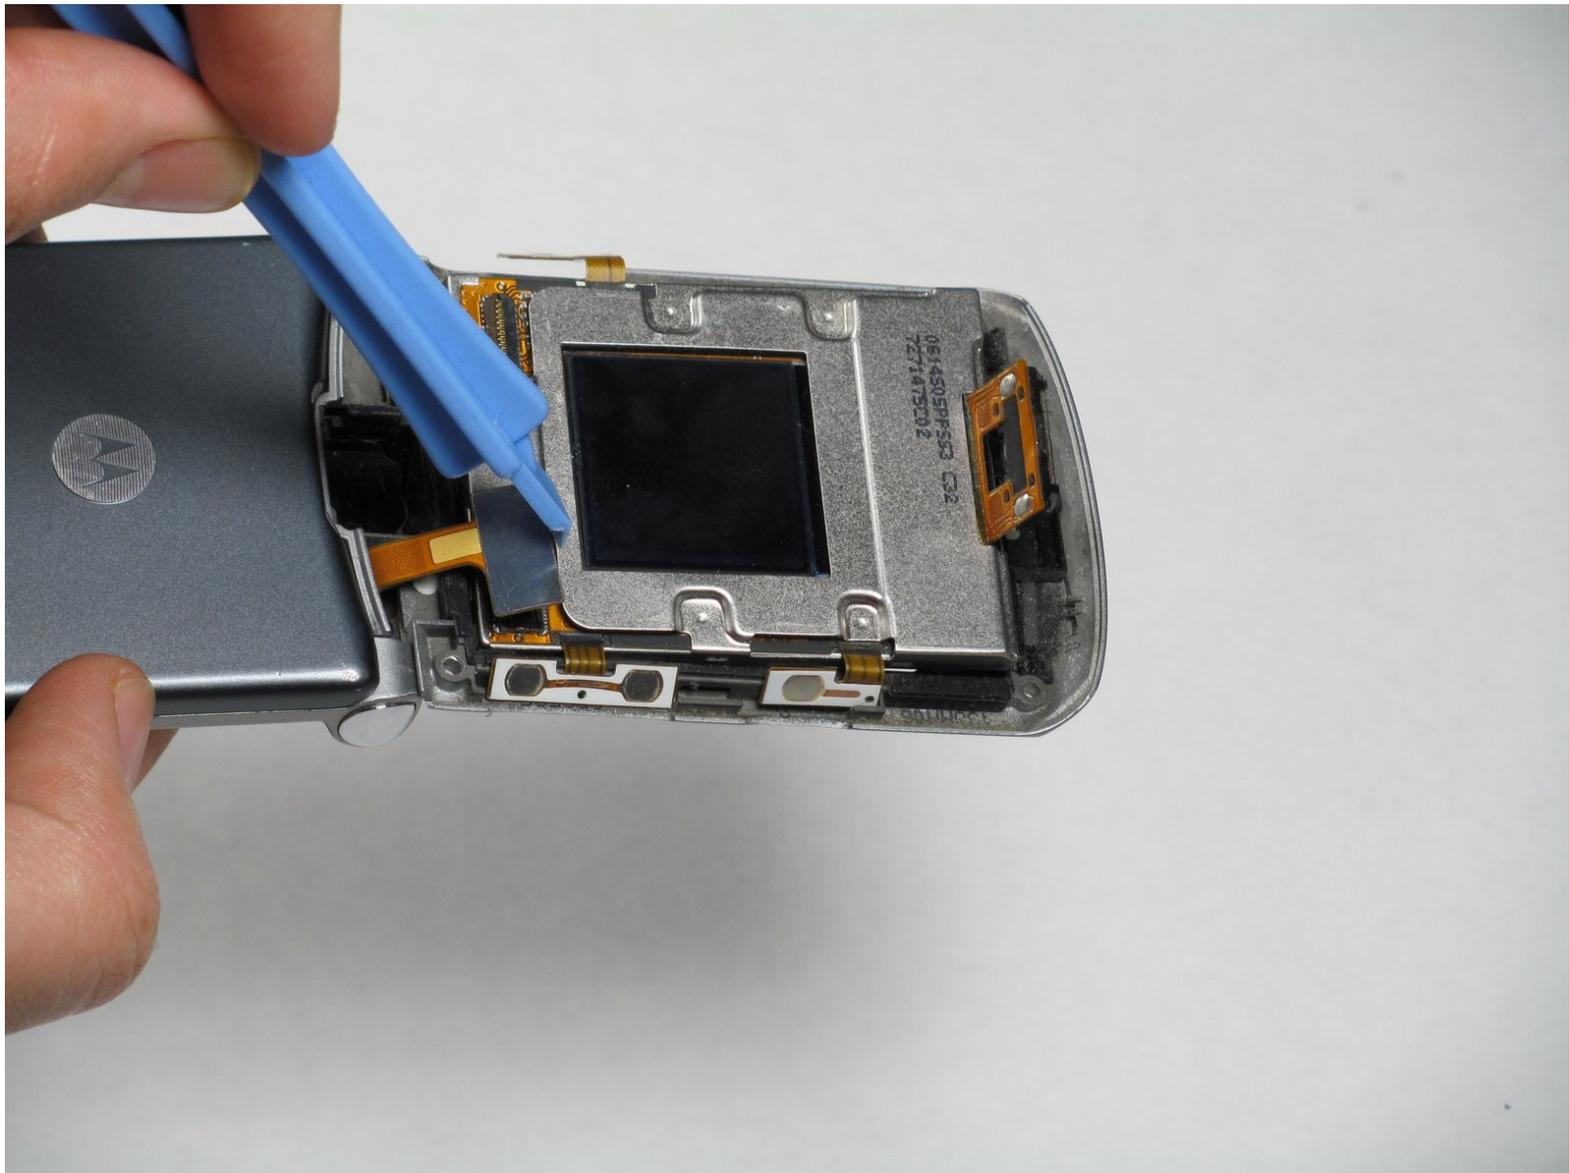

INTRODUCTION

This guide will show you how to remove and replace the screen for a Motorola V3c.

TOOLS:

- [Spudger](#) (1)
 - [T5 Torx Screwdriver](#) (1)
-

Step 1 — Upper Casing (CDMA)




- Remove the four rubber pieces from all corners of the area around the screen.

Step 2




- Use a T4 screwdriver to carefully unscrew all four screws on the outer screen.
- ⓘ Be sure that you do not strip or damage the screws.

Step 3

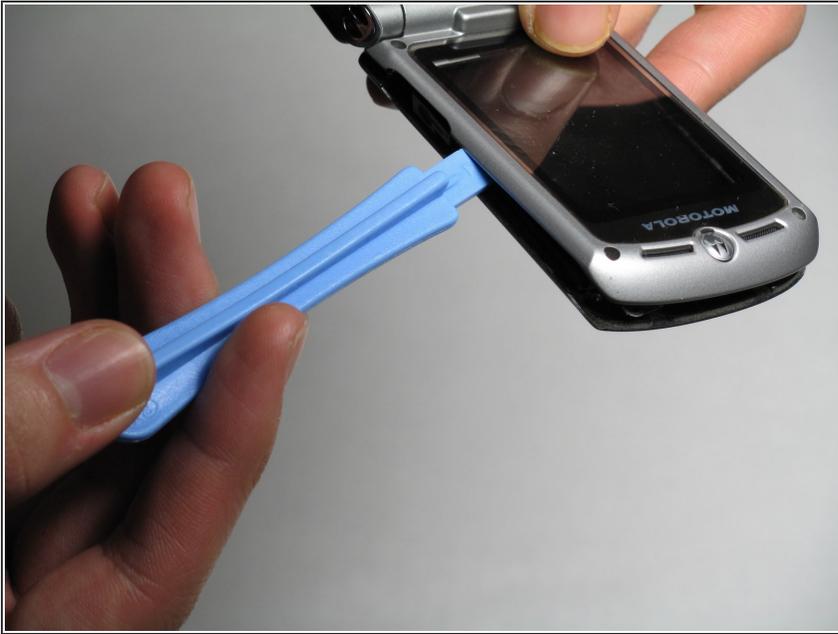


- Carefully pry the screen away from the phone using a plastic spudger.
- ⚠ Pry slowly, as too much bending will crack the screen. There are also two fragile ribbon cables that connect the screen and camera to the phone.

Step 4

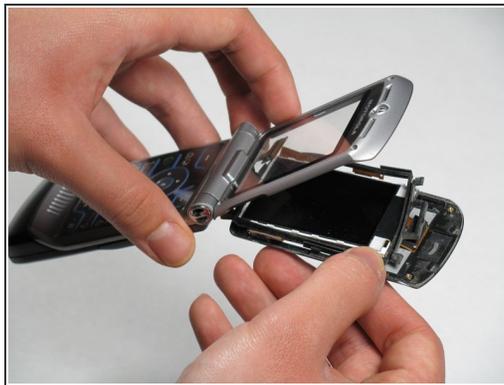

- Take the screen housing off of the casing.
- ⓘ Watch for small pieces falling out of the screen during this step. Keep track of these pieces.

Step 5 — Camera (CDMA)

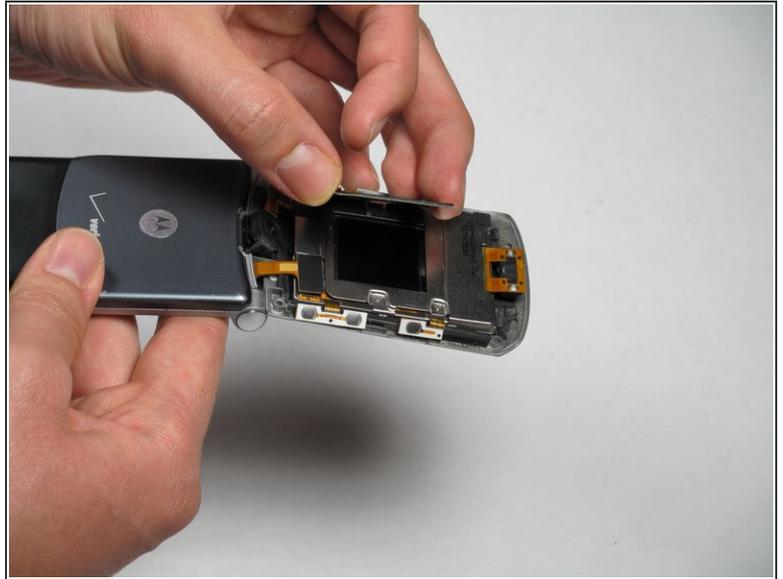


- Pry screen cover off with plastic opening tool.
- ⓘ The screen cover has some adhesive holding it to the screen.

Step 6




- Remove small black sticker covering the camera ribbon connector.

Step 7

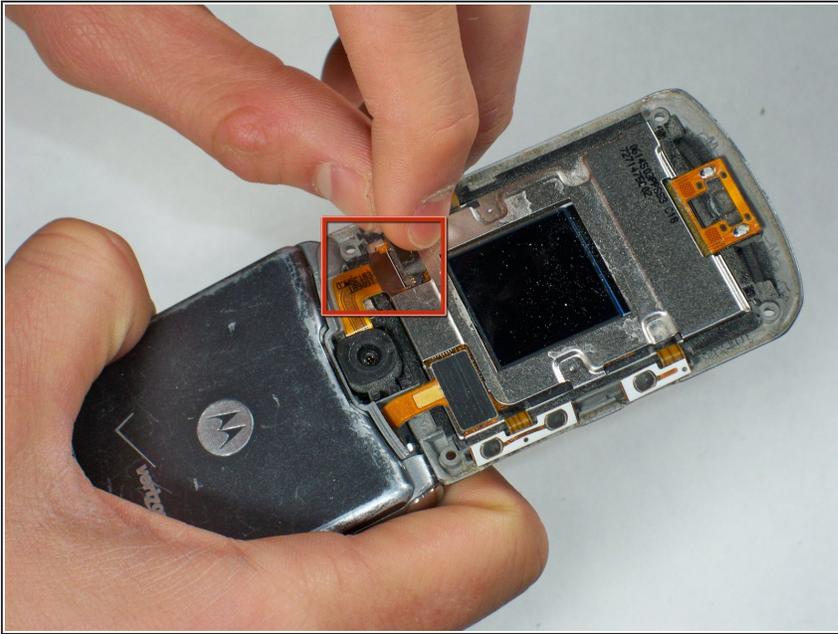

- Flip over small hinge that covers the camera ribbon connection.

Step 8

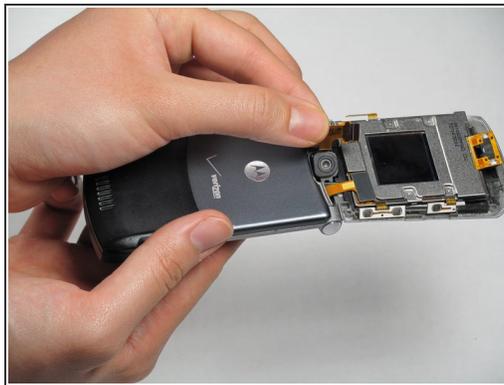


- Pull off the rubber camera cover and camera.
- ⓘ The camera and camera cover may come off either separately or together.

Step 9 — Screen (CDMA)



- Disconnect the metallic ribbon cover.

Step 10

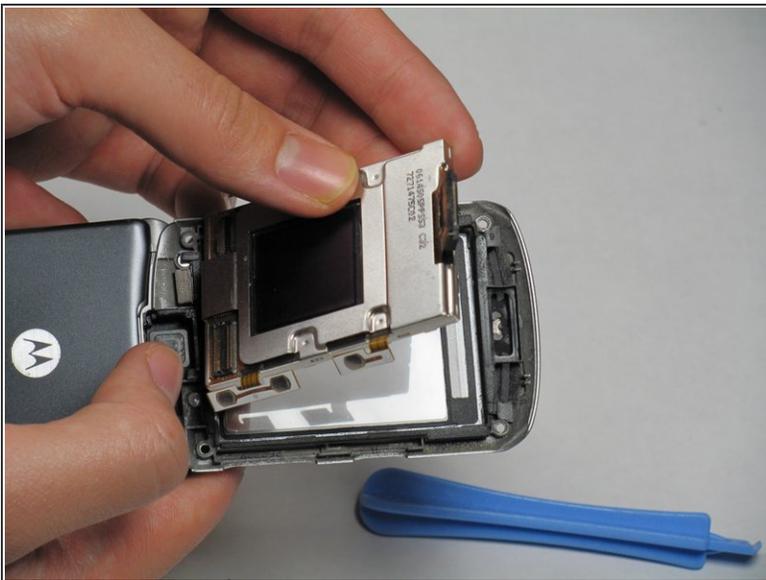

- Remove and replace the screen.