



RIM BlackBerry 7510 Disassembly

Written By: Laura Yanez



INTRODUCTION

This guide will show how to disassemble the Blackberry.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
-

Step 1 — RIM BlackBerry 7510



- Remove the back cover exposing the battery, and remove the battery.

Step 2



- Remove the six screws with the screwdriver using the T-5 tip.

Step 3



- Pry open back cover

Step 4




- Lift off the back cover.

Step 5



- Unscrew the two screws with a T-6 screwdriver head

Step 6

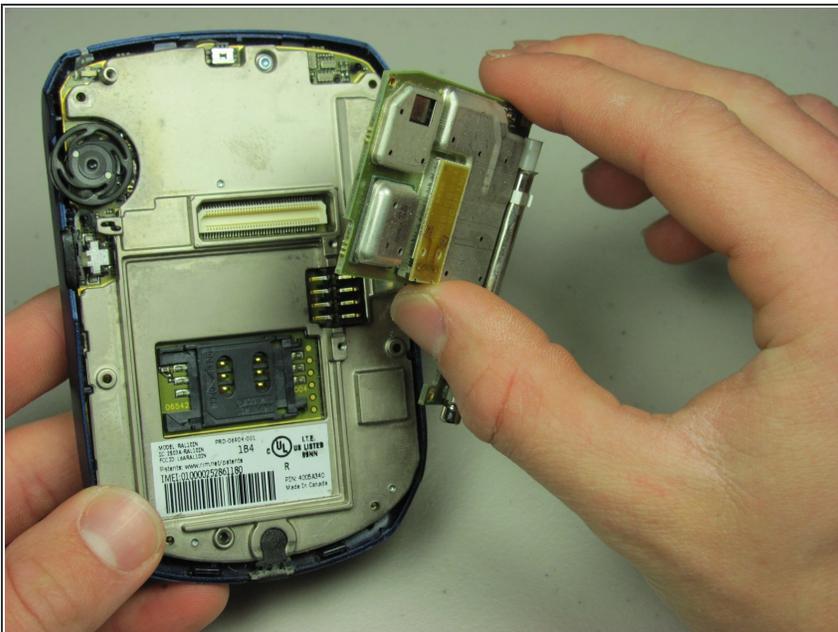


- Remove chip

Step 7




- Unscrew to remove the back plate

Step 8

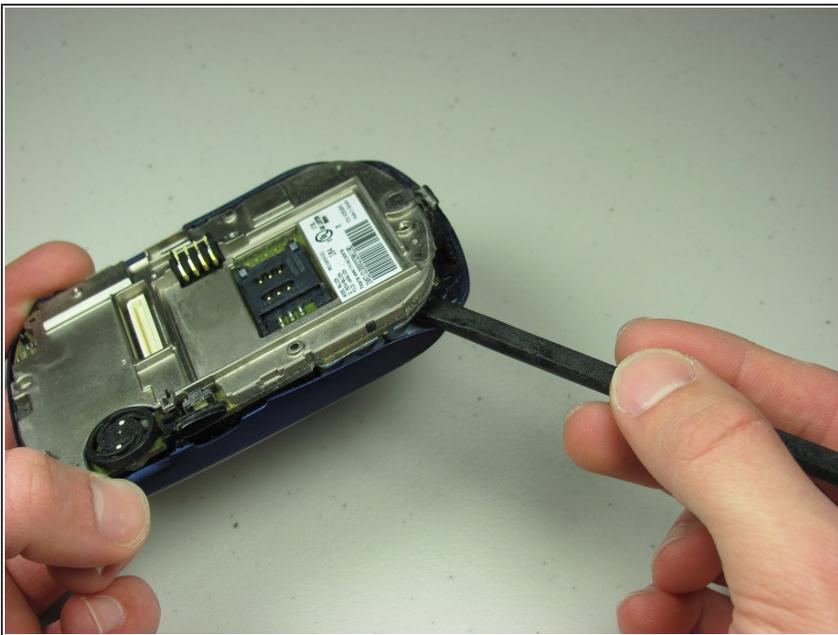

- Carefully pry off back plate

Step 9

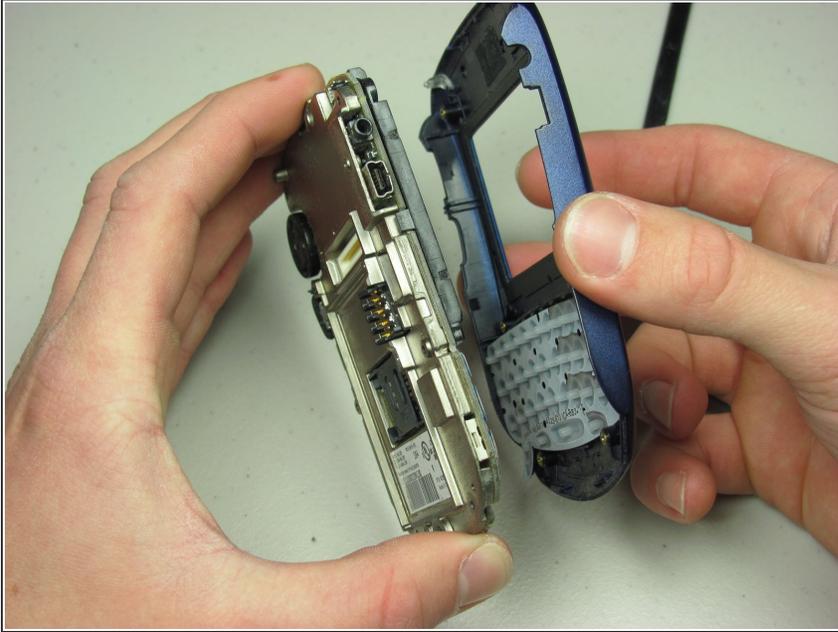


- Take off front cover and keypad

Step 10




- Remove one screw in the front.

Step 11

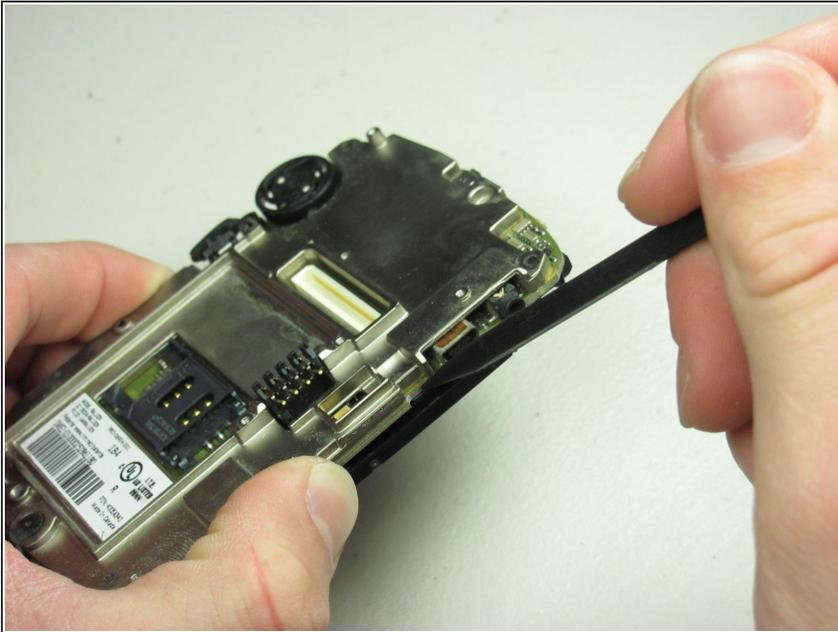


- Pry the two parts apart.

Step 12

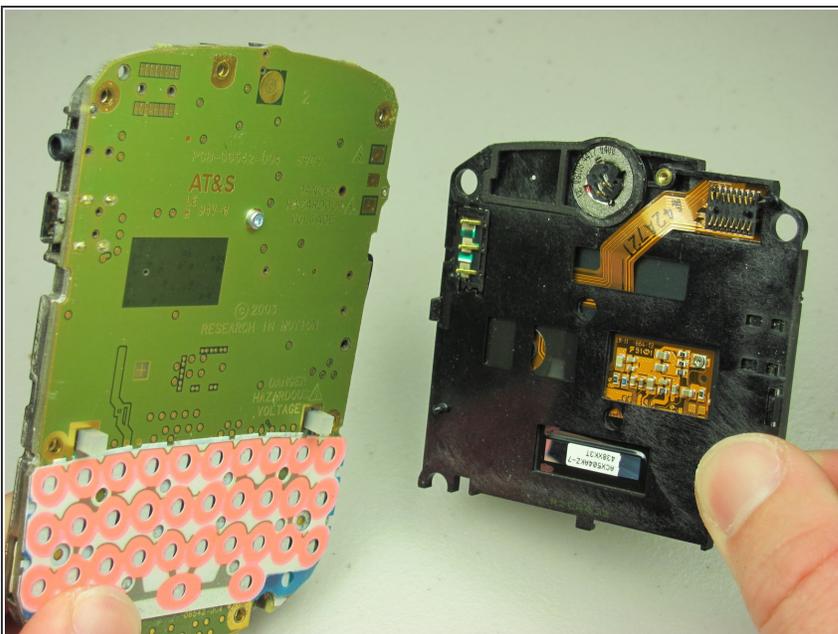


- The screen is now apart from the phone.

Step 13

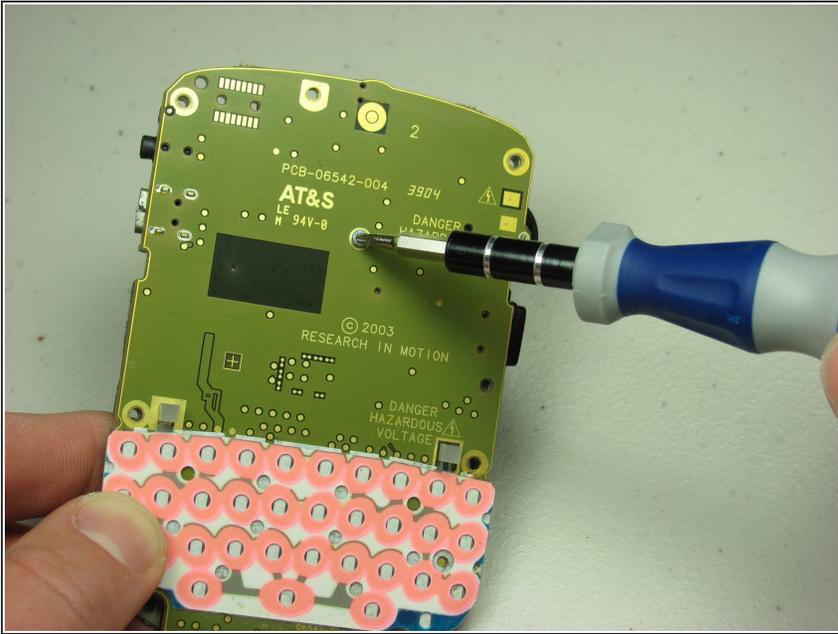


- Using the Philips screwdriver unscrew center screw.

Step 14

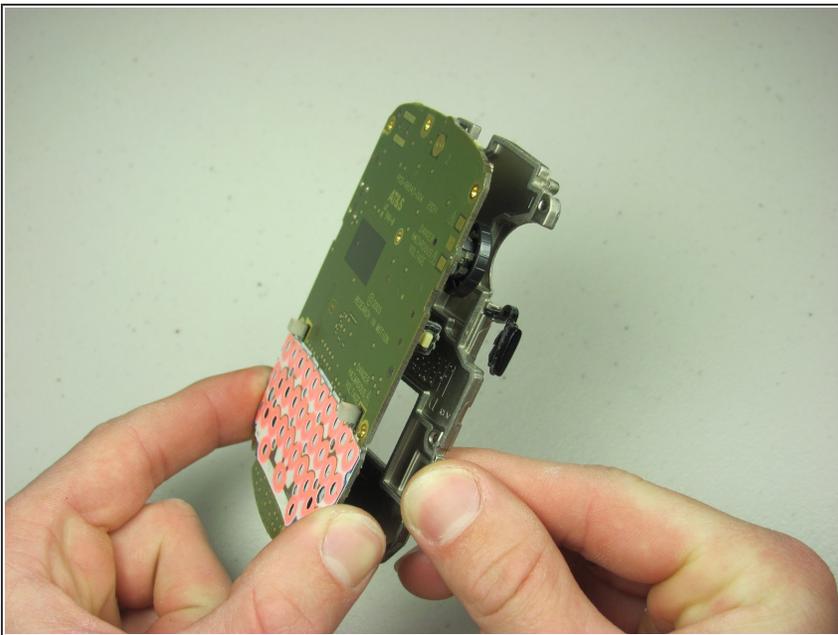


- The final two parts now come apart.

Step 15

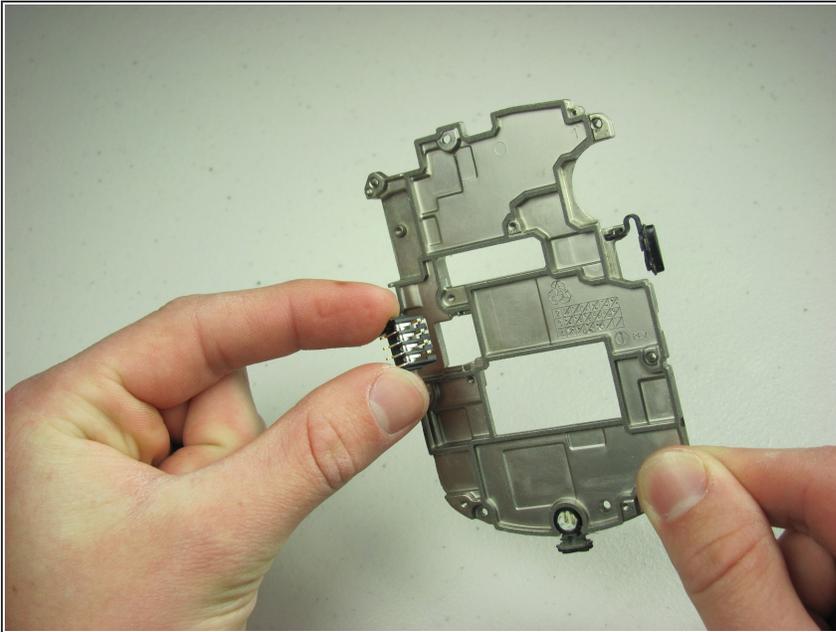

- The phone is now completely disassembled. Handle back with care shown piece comes right off.

Step 16

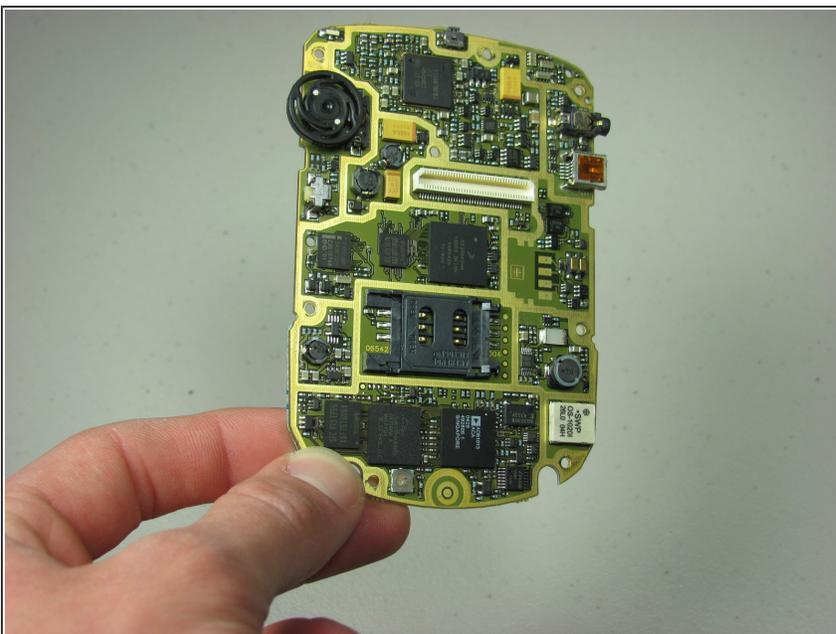

- Your blackberry has been fully disassembled.

To reassemble your device, follow these instructions in reverse order.