



LG VX3200 Keypad Replacement

Written By: Bradley Hutchinson



INTRODUCTION

How to replace the phone's soft keypad.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
-

Step 1 — Battery



- Press button labeled "Push". In the photo depicted the button is being depressed by the left finger.
- Pull back panel toward bottom of phone.

Step 2



- From the lip on the top of the battery, lift it out of the phone.

Step 3 — Keypad




- Remove the 4 small screws from the back panel, under the battery, using 00 Phillips-head.

Step 4



- Starting at the top of the phone near the antenna, use a screwdriver or other small tool, maybe even fingernails, to pry the rear panel off.
- ⓘ There are 4 places where the panel snaps together to the main part of the phone.
- By systematically prying up the edges of the back panel, moving about a quarter of an inch, and prying again, the panel will begin to lift off.
- Don't be afraid to damage anything, the panel requires a bit of force to detach.

Step 5

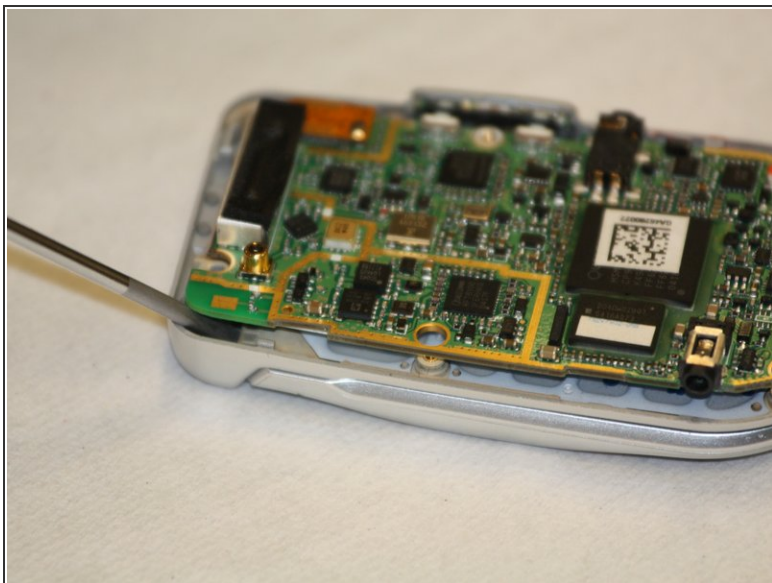

- The logic board is only held on with 4 tabs and a data cable in the top right. Simply pry from one side using a screwdriver, popping out the board, before lifting the display data cable.

Step 6



- Lift the keypad up from beneath the logic board.
- ⓘ It is not glued or secured in any way, so it should come away easily.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-11-28 01:43:22 AM (MST).

