



Samsung Blast Back Cover Replacement

This guide will describe the process of removing the back cover of the phone. The circuit board will be accessible after this process.

Written By: Joseph



INTRODUCTION

Model SSGH T729



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Spudger](#) (1)



PARTS:


- [Phone](#) (1)

Step 1 — Back Cover




- Place the phone face down on the table. Locate a Phillips head screwdriver. Begin by first removing the four screws that surround the upper area of the Samsung phone.

Step 2

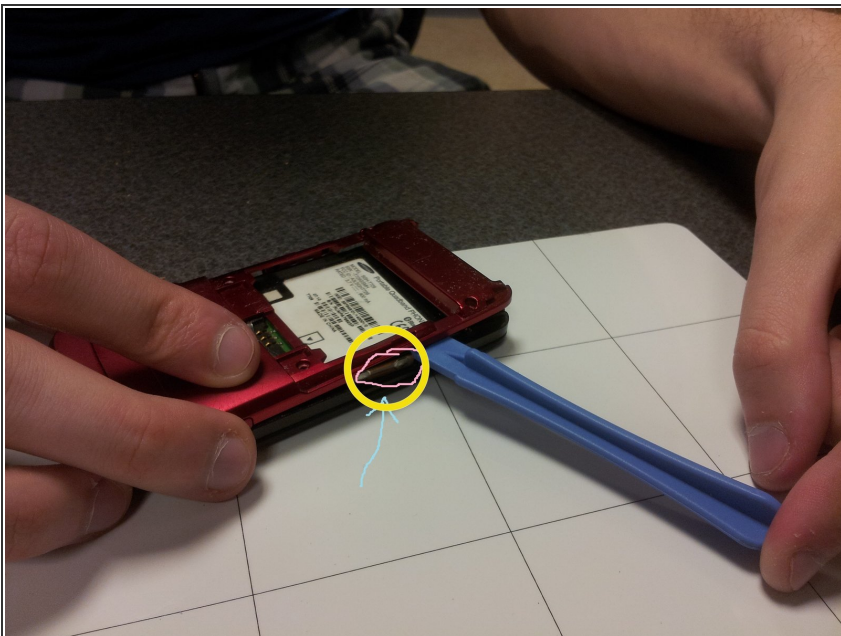


- Next, remove the side button by prying open the the side of the phone with a prying tool. Insert the prying tool between the back cover and the remainder of the phone. Slide the prying tool to the left, creating a division between the cover and the phone.

Step 3

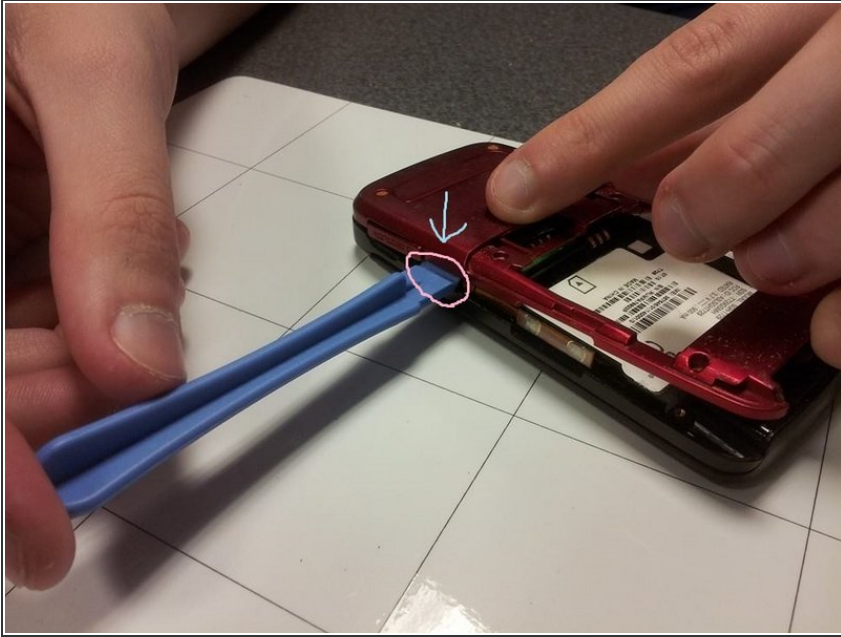

- Continue using the prying tool to unlock the phone. If you hear a popping sound you know that you are on the right track. Be gentle as to not snap the screw-posts inside the case.

Step 4

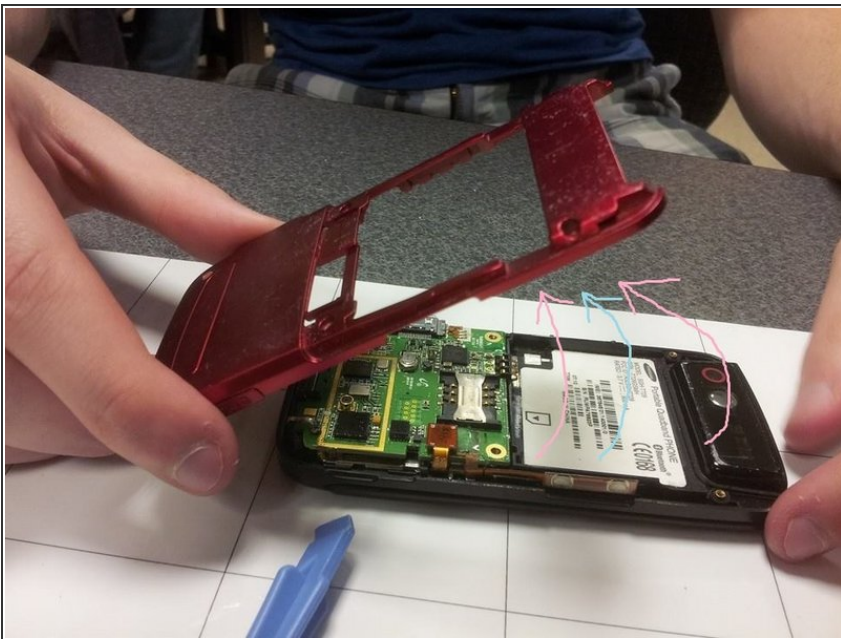

- Finally, remove the back cover by gently lifting the case up, ensuring that nothing is still attached to the cover.

To reassemble your device, follow these instructions in reverse order.