



Motorola V60i Keypad Replacement

Step-by-step guide to replacing your phone's keypad buttons.

Written By: Elizabeth OBrien



INTRODUCTION

Step-by-step guide to replacing your phone's keypad buttons.



TOOLS:

- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Flip the phone over so the back cover is facing up.
- Using either a finger or a spudger, press the button located near the top of the phone by the antenna.

Step 2



- Pry up the back plate from the phone.
- Push the button near the bottom of the battery using either your finger or the spudger to release the battery.

Step 3 — Back Plate




- Using a T6 Torx screwdriver, remove the four screws from the back of the phone.

Step 4




- Simultaneously press the highlighted buttons on both sides of phone.

Step 5

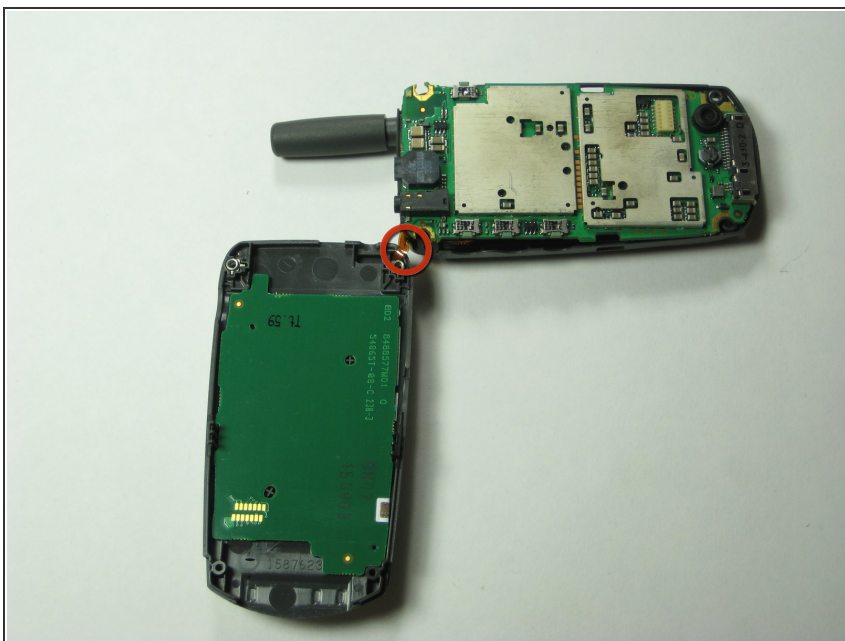


- Separate the back plate from the rest of phone.
- ⚠ Do not pull the wire connecting the front and back plates.

Step 6 — Motherboard

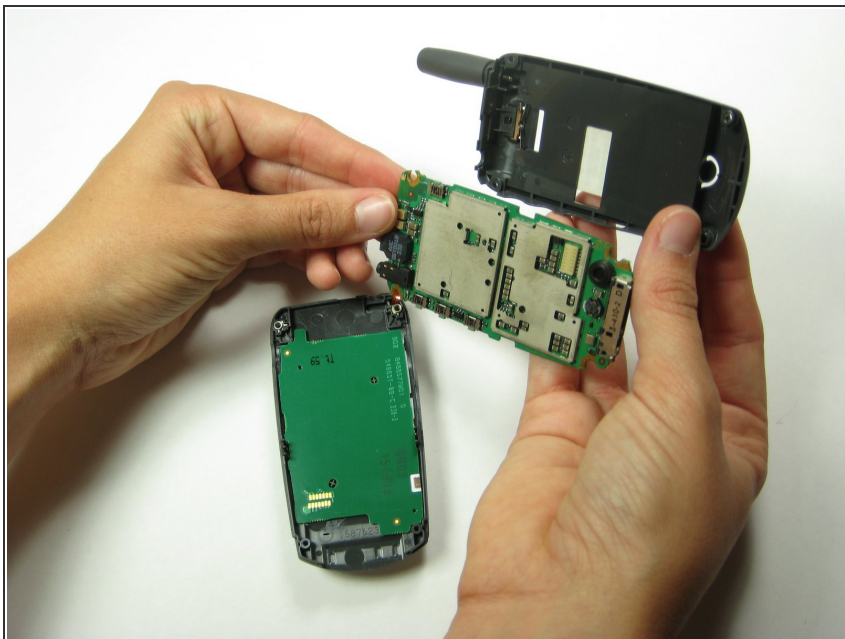


- Gently lift logic board from back plate.

Step 7

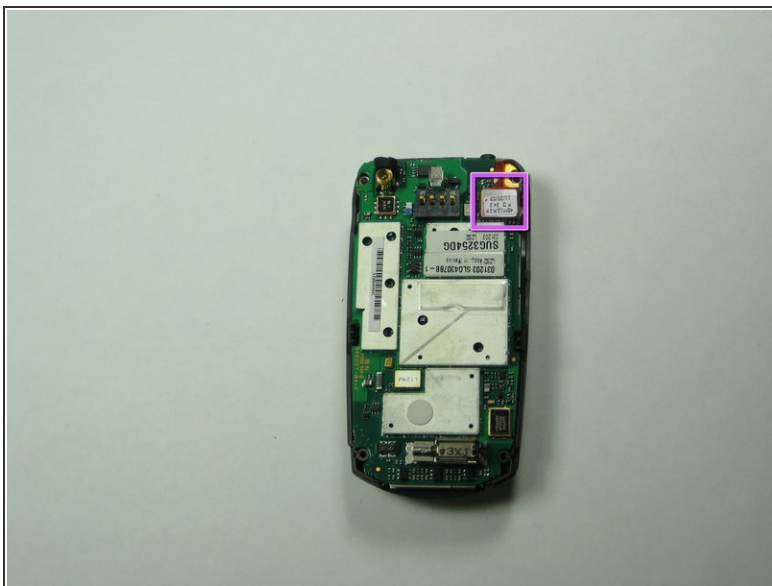

- Place logic board on front cover.
- Unsnap orange wire that connects the logic board to keypad sensor to allow the logic board to move freely.

Step 8 — Keypad Sensor

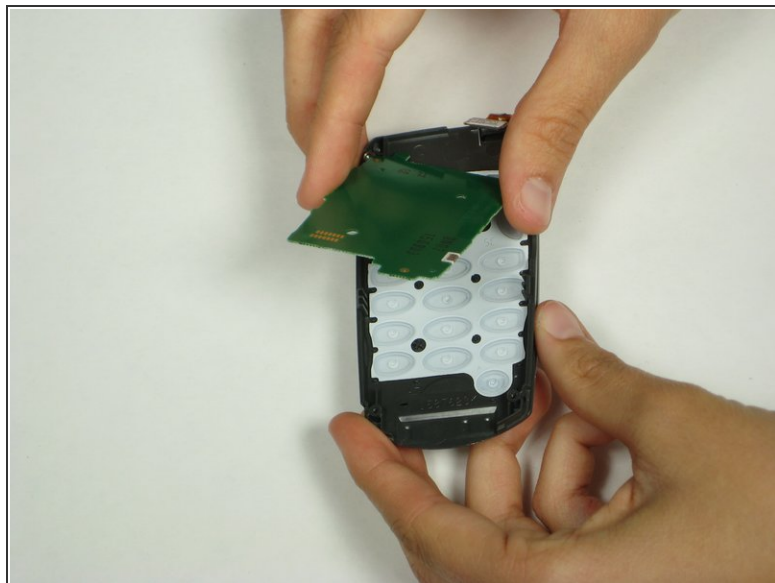

- Once logic board is removed lift the green keypad sensor for the front plate.

Step 9 — Keypad



- To replace keypad buttons, lift off white tray containing buttons.

To reassemble your device, follow these instructions in reverse order.