




# Sony Xperia TL Auxiliary Cord Replacement

This piece connects the microphone to the motherboard so the other person can hear you speaking.

Written By: Adam Giniger

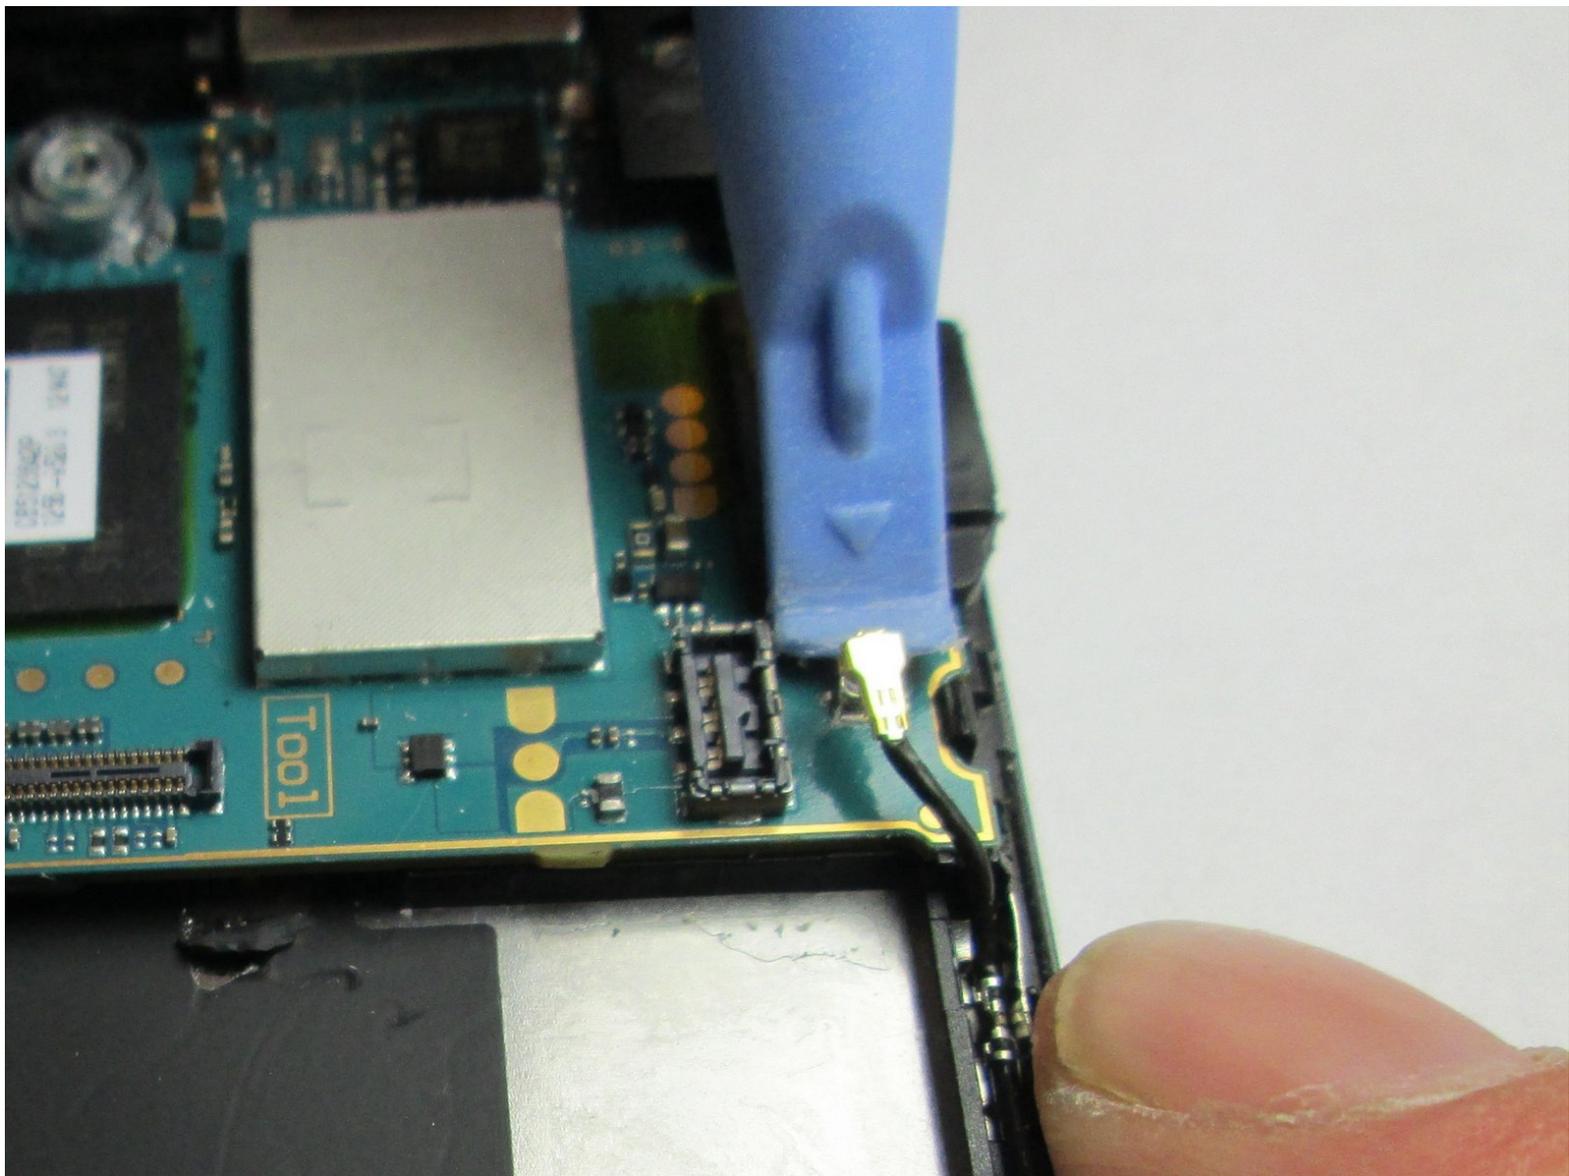

---

## INTRODUCTION

I will teach you where it is and how to replace it.

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Remove Top Plastic Section




- Use the plastic opening tool to pry the top plastic section off.

## Step 2 — Remove Bottom Plastic Section





- Use the plastic opening tool to pry the bottom plastic section off.

### Step 3 — Unscrewing the Back Off

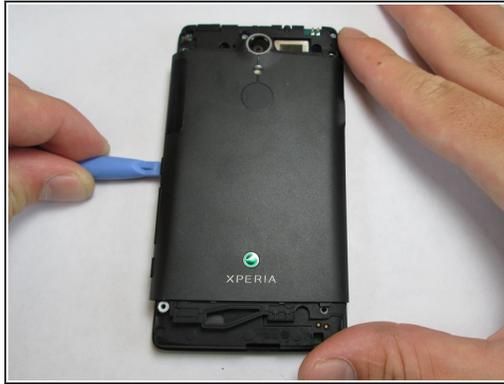


- Remove the four 5mm screws.
- Use the plastic opening tool to pry off the back.

### Step 4 — Loud Speaker

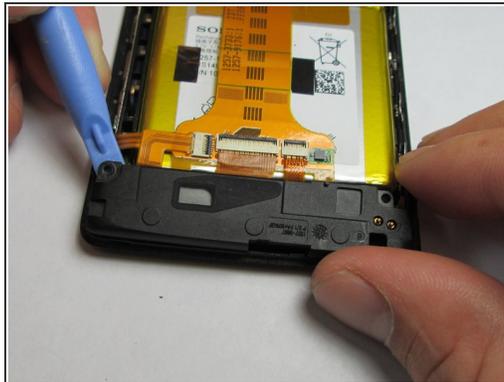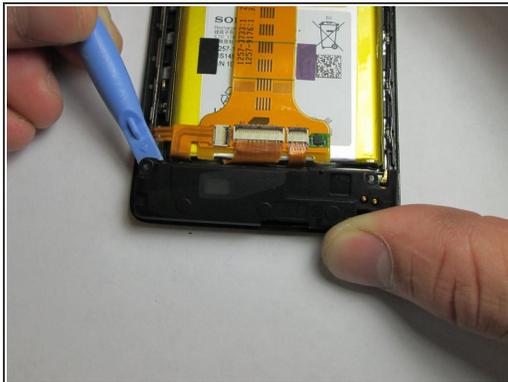

- Use the plastic opening tool to remove the loud speaker module.

## Step 5 — Sony Xperia TL Auxiliary Cord Replacement

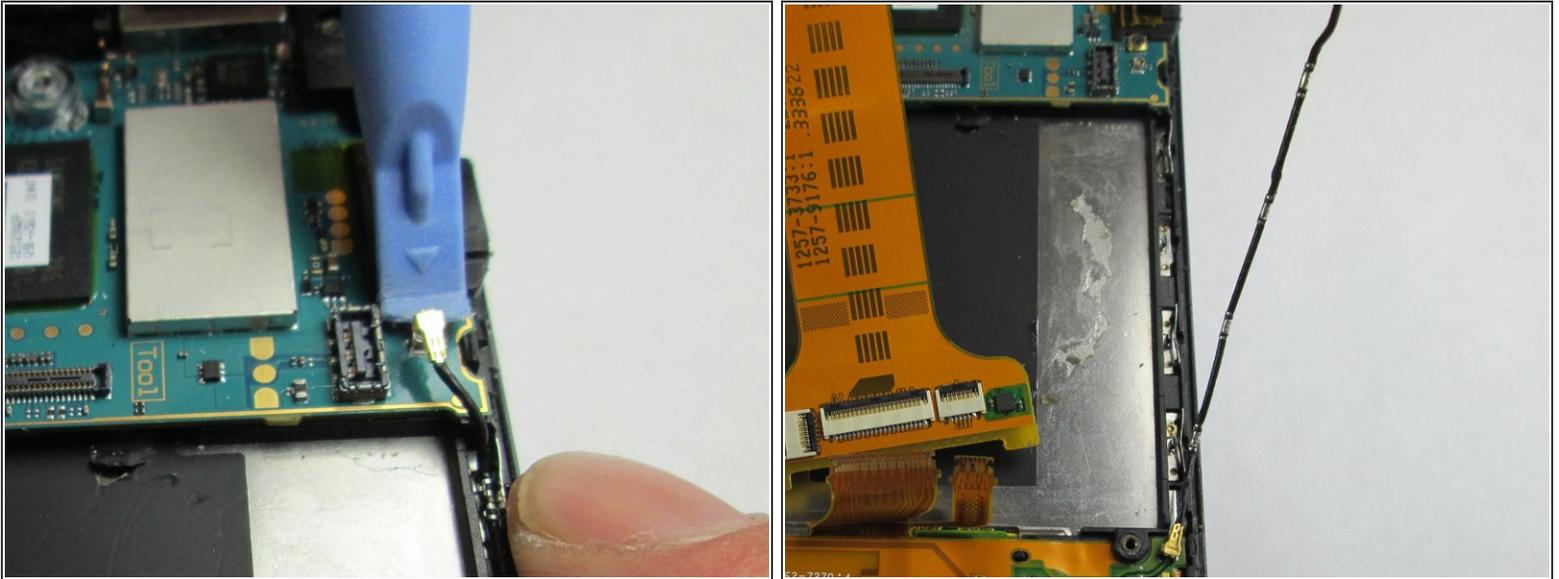

- Use the plastic opening tool to unlatch the cord's ends off the motherboard and loud speaker module. The cord can be located on the right side of the phone.

To reassemble your device, follow these instructions in reverse order.