



Nokero N400 Back Cover Replacement

If anything needs to be repaired from inside the device this step is required to get in to the device.

Written By: Kasey Kolyno




INTRODUCTION

This guide will serve as a prerequisite guide to accessing the various components of your device and replacing the battery if your battery no longer recharges or will not hold a charge.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Remove Battery Cover

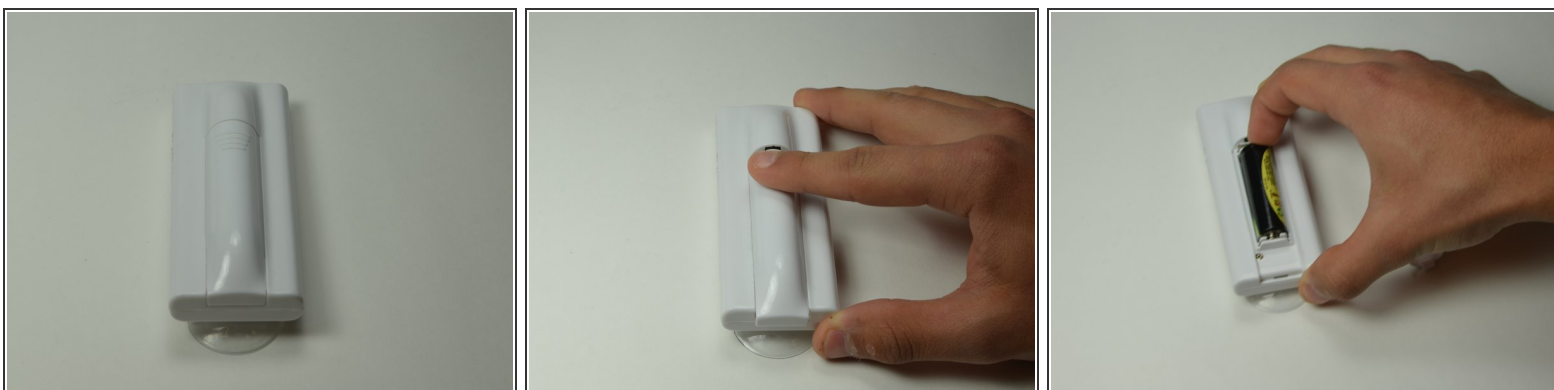



- Press down firmly to remove the battery cover and display battery.
- Then remove the battery.

Step 2 — Unscrew Back Cover



- Remove the 7mm Phillips #1 screw.

Step 3 — Pry Open Back Cover

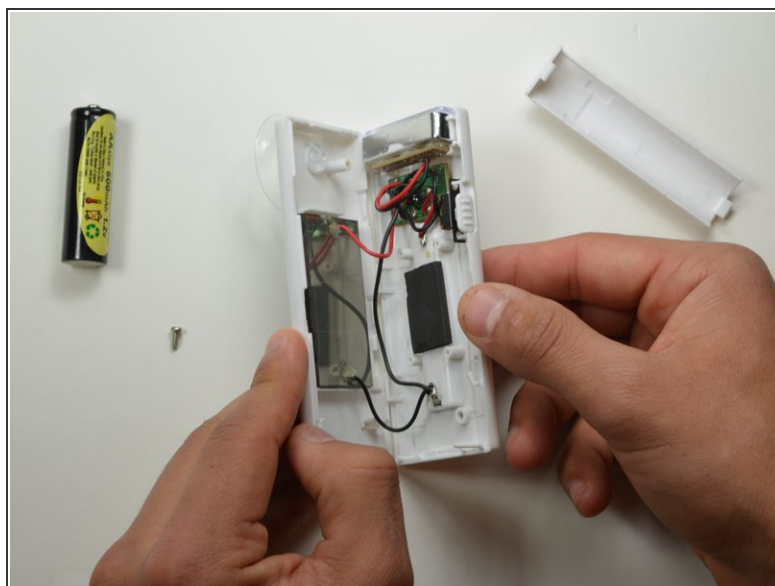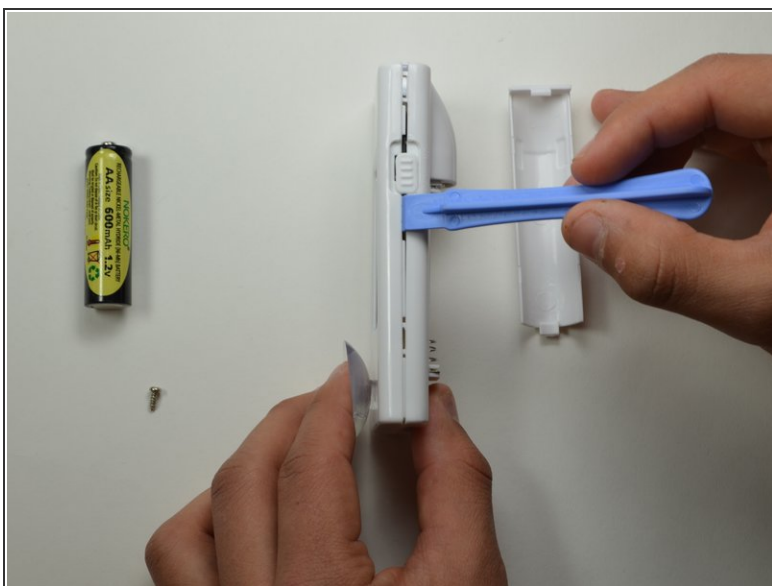

- Place the plastic opening tool in between the two plastic panels and slowly work your way around the device.
- Unlatch the clips on the inside and pull device apart.
- ⓘ Some clips will break when forced open.

To reassemble your device, follow these instructions in reverse order.