



Oculus Rift Development Kit 2 Display Screen Replacement

If there are cracks or mars in the video...

Written By: Adam



INTRODUCTION

If there are cracks or mars in the video display, the display screen may be broken.

TOOLS:

Phillips #0 Screwdriver (1)

iFixit Opening Tool (1)

Tweezers (1)

Phillips #1 Screwdriver (1)

Step 1 — Eye Relief Adjustment Screw



- Remove front cover plate.
- Unplug the USB and HDMI cables from the Oculus Rift DK2.

Step 2



- Remove the four 3/8" Phillips #0 screws from the inner portion of the headset.

Step 3



- With the screws removed, gently pull the headband frame apart from the headset.

Step 4 — Remove Lens



- With the Oculus facing up, twist the right lens clockwise and lift it out. Repeat for the left lens twisting counterclockwise instead.

Step 5 — Headset Motherboard



- Using [tweezers](#), carefully lift the four rubber plugs as shown. They are a bit snug and you may need to jiggle them free with the tweezers.

Step 6



- Remove the four 3/8" screws attaching the eyewear enclosure to the front casing.

⚠ Read the next step before removing the faceplate!


Step 7



- Carefully separate the faceplate and the cover. Gently rest the cover plate on top of the faceplate as shown in the pictures.

⚠ Do not use excessive force when separating these two pieces. There is a delicate ribbon cable connected to each.

Step 8

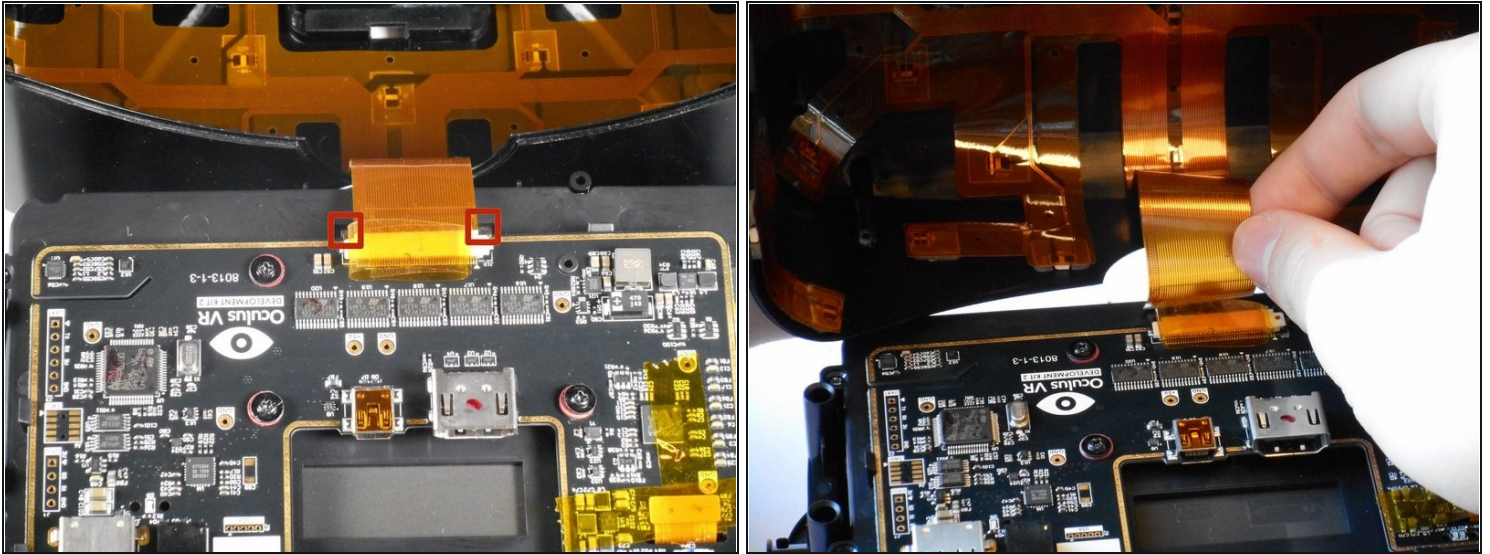


- Gently pull out the small side tabs on the ribbon cable connector as shown to release the cable.
 - Push the tabs away from you, with the headset oriented as pictured. Carefully slide the ribbon cable out.
- ① The headset should now be two separate pieces.

Step 9




- Unscrew the three 1/4" Phillips #00 screws as pictured and use the tweezers to lift them out.

Step 10

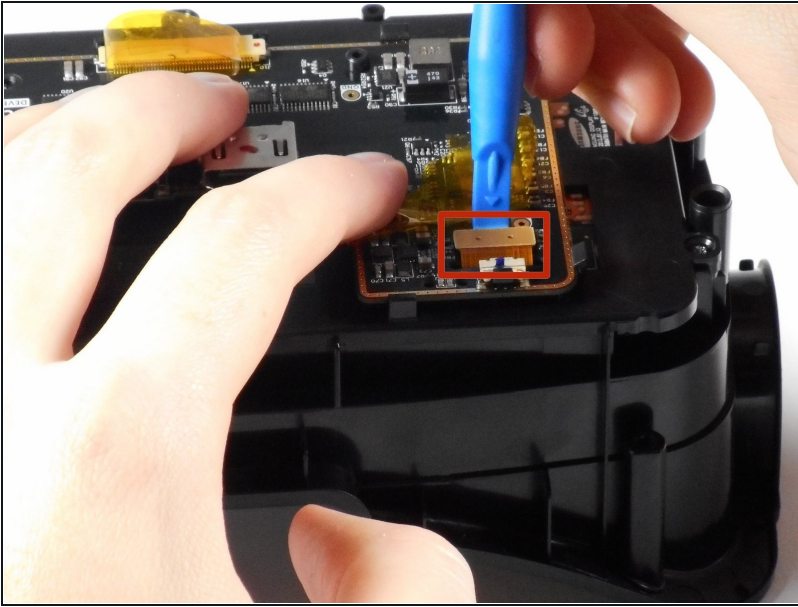


- Lift the tape and gently pry up the video data ribbon cable using the plastic opening tool as shown.

Step 11

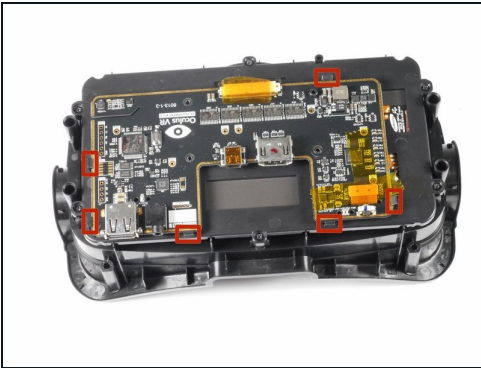

- Gently pry back the motherboard clips to release the motherboard. The motherboard should now lift free.

Step 12 — Display Screen

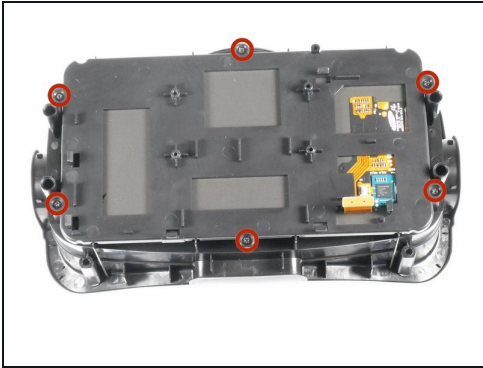

- Remove the six 1/4" Phillips #1 screws as shown. There should be two on each short side, and one on each long side.
- Gently lift the plastic screen holder and display screen away from the remaining piece of the faceplate.

To reassemble your device, follow these instructions in reverse order.