



Motorola V557 Faceplate Replacement

Written By: Blair Frandeen



TOOLS:

iFixit Opening Tool (1)

Push Pin (1)


T6 Torx Screwdriver (1)

Step 1 — Faceplate



- Remove the four rubber stoppers from around the screen with a pin to reveal four screws.

Step 2

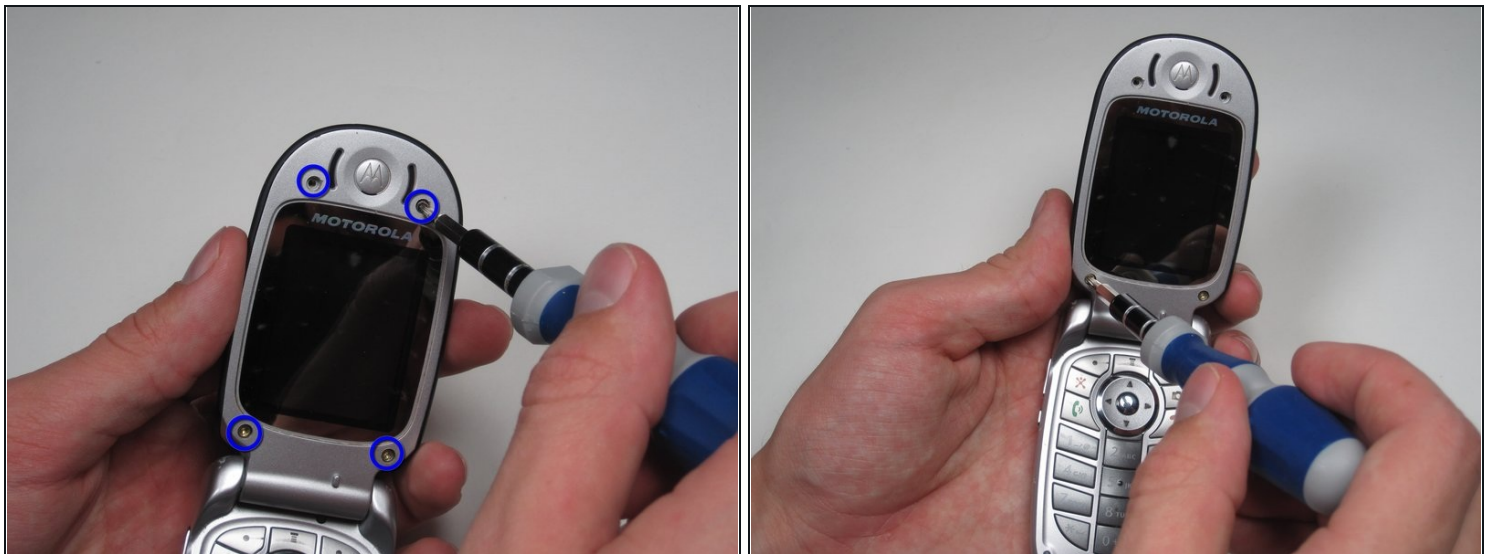

- Remove the four 3.8 mm T-6 Torx screws.

Step 3



- Separate the cover from the edges using a plastic opening tool.

Step 4



- With the edges separated, close the phone and lift off the faceplate with your fingers.

To reassemble your device, follow these instructions in reverse order.