




# Uniden D1483-3BK Handset Case Separation

Prerequisite only.

Written By: Arbitrary Name

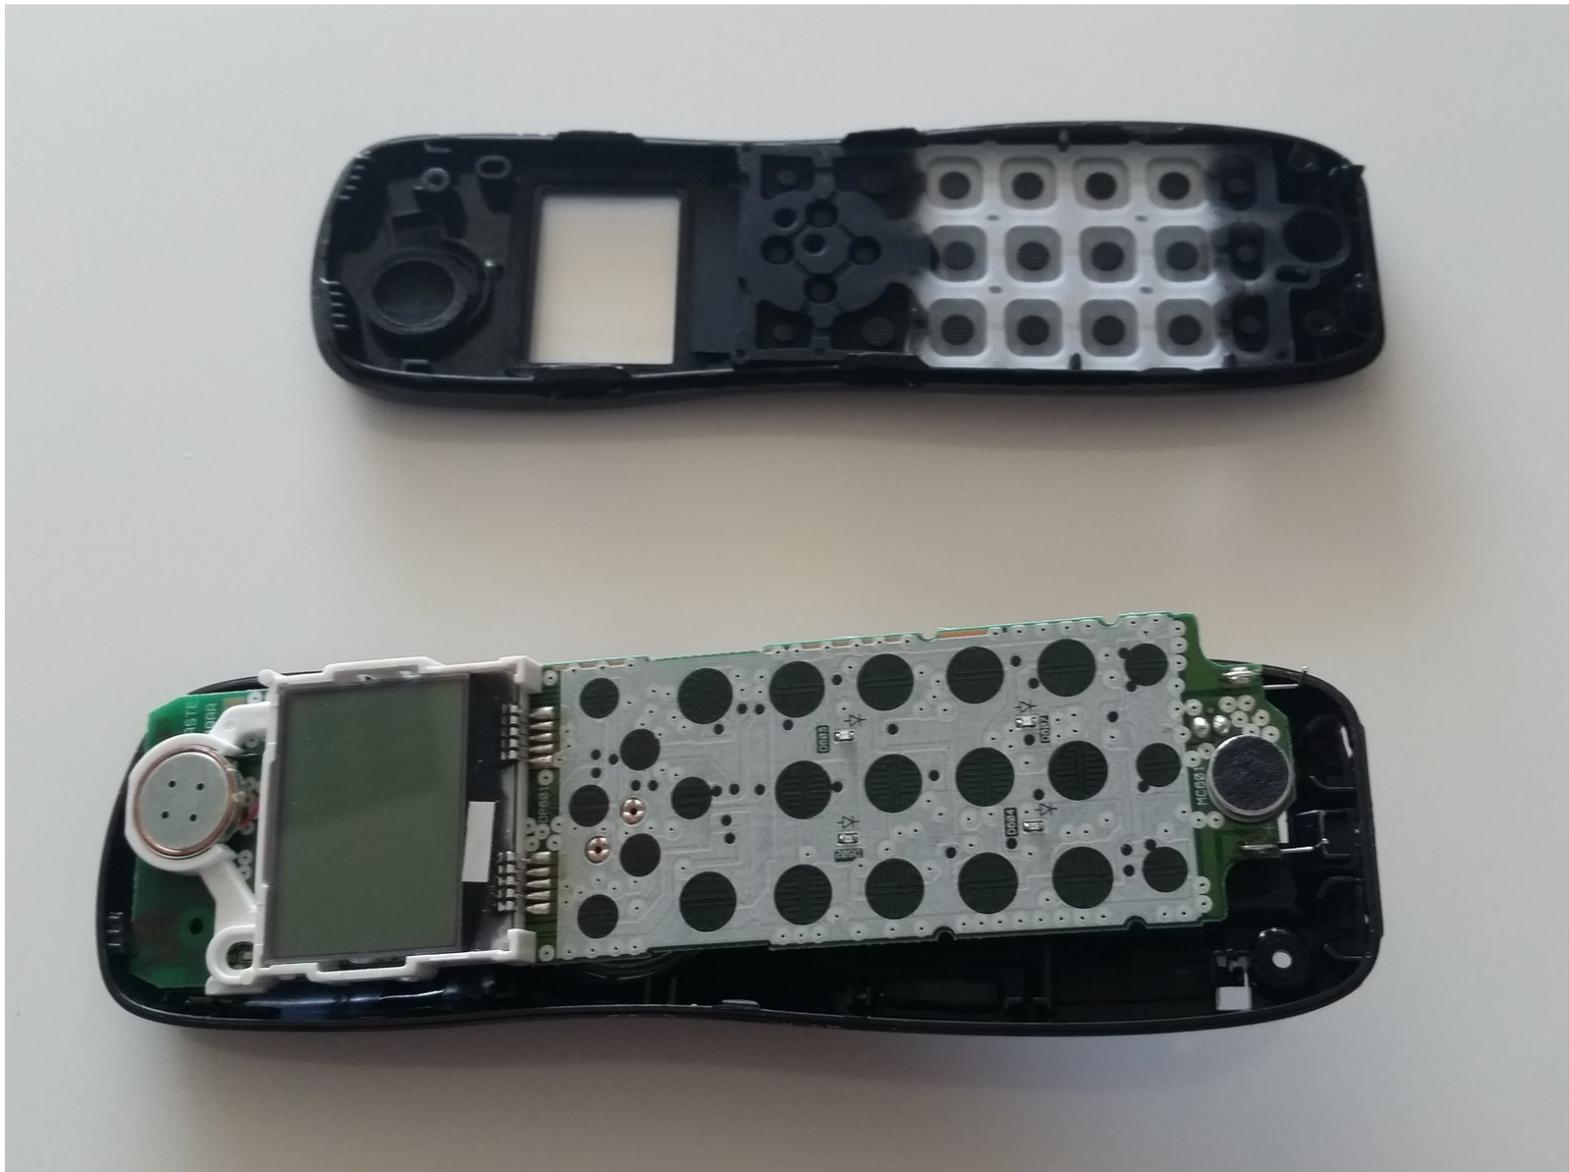

---

 **TOOLS:**


- [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Handset Case




- Remove the two 9mm Phillips #1 screws in the battery compartment.

## Step 2

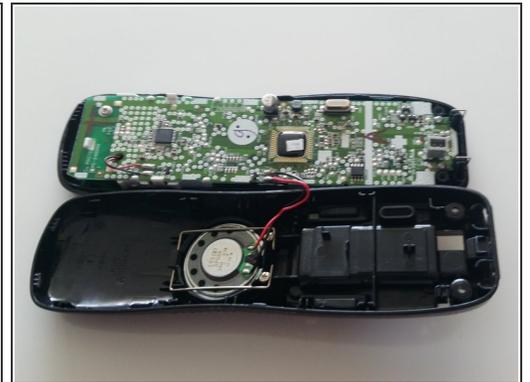


- Use the plastic opening tool to carefully separate the two halves of the case.
  - Slowly work around the entire case to fully separate the halves before pulling them apart.
- ⚠ Wires inside the case hold the two halves together, tearing these wires will lead to a need for additional repair.

### Step 3

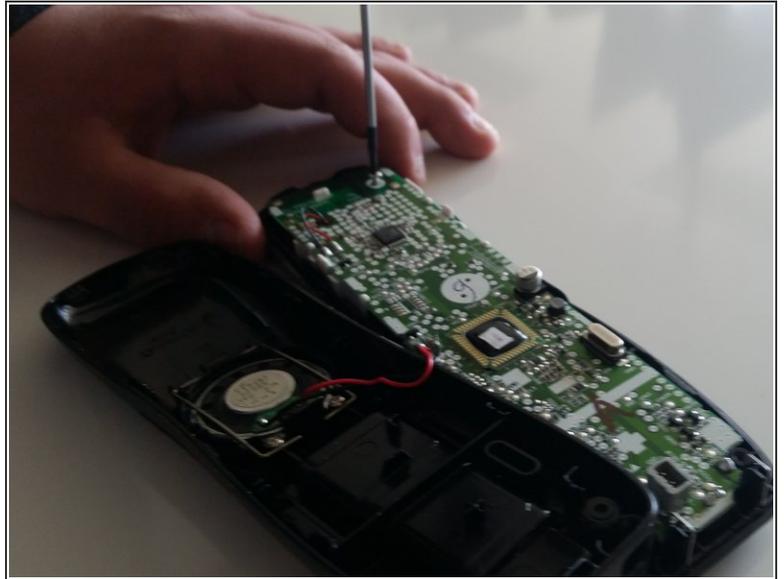

- Carefully remove the 9mm Phillips #1 screw from the top corner of the circuit board.

### Step 4

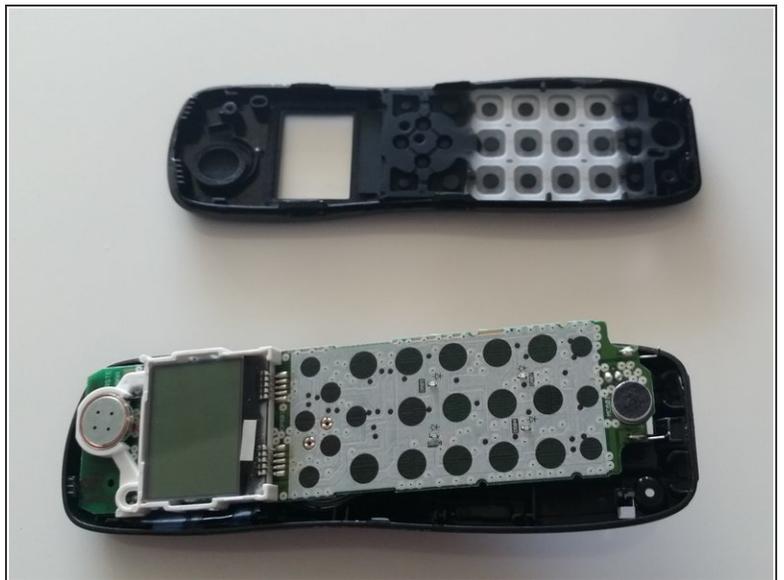

- Carefully grasp either side of the circuit board and lift it straight out of the front half of the case.
- Set the board in the lower half of the case.

To reassemble your device, follow these instructions in reverse order.