



iBook G3 14" Rear Display Bezel Replacement

Internal Prerequisite.

Written By: Andrew Bookholt



INTRODUCTION

Internal Prerequisite.

TOOLS:

- [Coin](#) (1)
 - [Paper Clip](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [T8 Torx Screwdriver](#) (1)
-

Step 1 — Rear Display Bezel



- Use a 1.5 mm hex screwdriver to remove the two hex screws on either side of the display (four screws total).
- ⓘ If you don't have a 1.5 mm hex driver, you can probably get these screws out with a T6 Torx screwdriver. However, if you use a T6 Torx driver you'll be more likely to strip the screws.

Step 2




- Use your thumbs to slightly separate the rear bezel from the front bezel.
- ⓘ It is helpful to hold the opposing corner of the display stationary to aid in flexing the rear bezel away from the display.

Step 3



- Insert the flat end of a spudger into the gap between the front and rear bezels.
- Rotate your spudger until it is parallel to the front face of the display.
- Run the spudger around the perimeter of the display to separate the rear bezel from its retaining clips.

Step 4

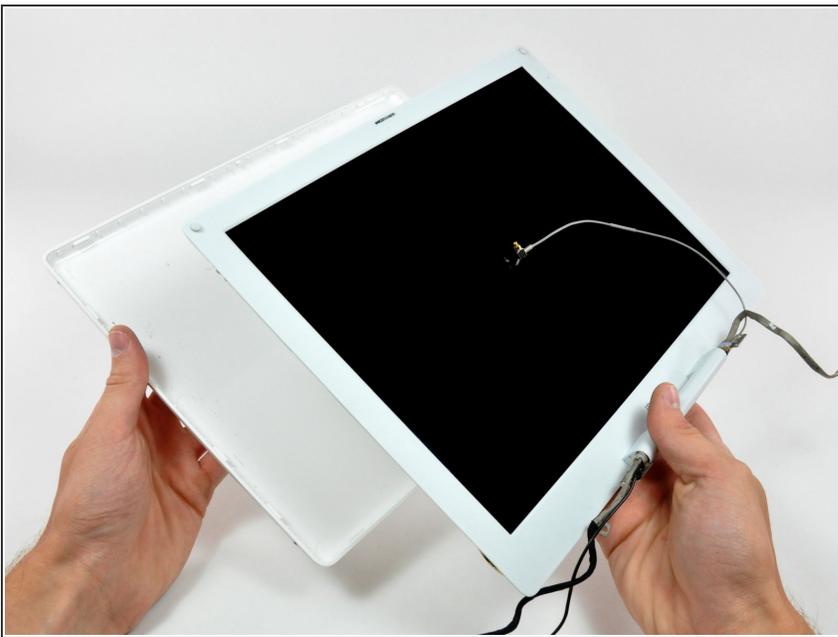

- Lift the rear bezel off the display.

To reassemble your device, follow these instructions in reverse order.