



# INTRODUCTION

If your battery does not hold as much charge as it used to and you need to replace it, then you have come to the right place! This guide will show you how to successfully remove and replace the battery.

## TOOLS:

Tweezers (1)

T5 Torx Screwdriver (1)

Phillips #00 Screwdriver (1)

## Step 1 — Lower Case




- Remove the eleven 6 mm T5 Torx screws securing the lower case.
- Gently lift the lower case up and away from the device.

## Step 2 — Battery




- Remove the two 3 mm Phillips #00 screws securing the battery.
- ⓘ There are arrows on the battery indicating the location of the screws.

## Step 3

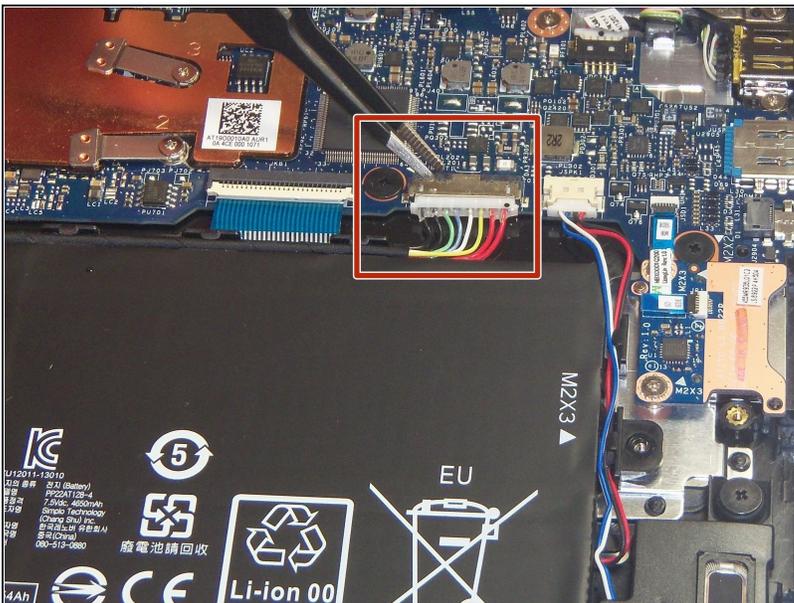


- Use a pair of [tweezers](#) to gently disconnect the battery connector.

## Step 4

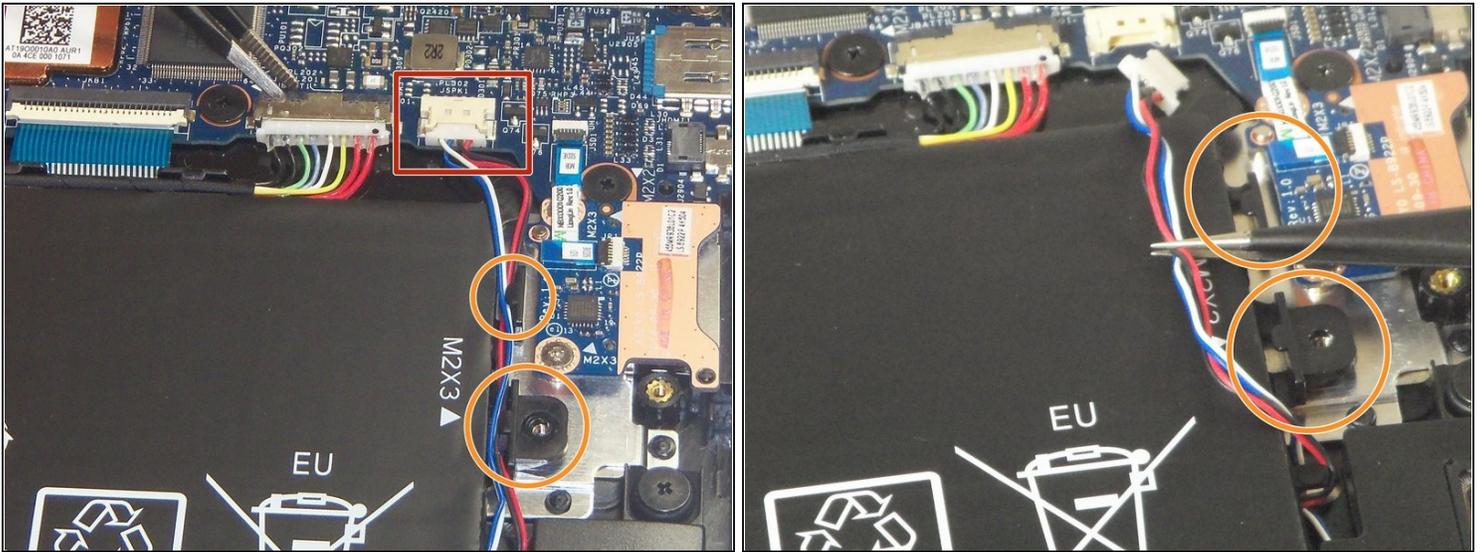

- Use a pair of tweezers to gently disconnect the speaker cable.
- Remove the wires from underneath the battery tabs using the tweezers.

## Step 5

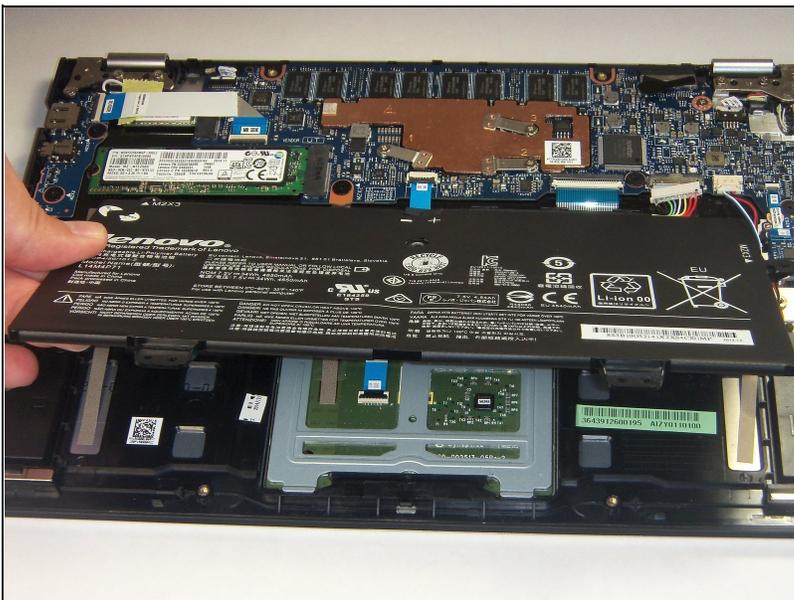

- Carefully remove the battery from the device.

To reassemble your device, follow these instructions in reverse order.