




Xiaomi Mi 4 Display Assembly Replacement

The Xiaomi Mi 4 has a liquid crystal display...

Written By: Robert Cobaich

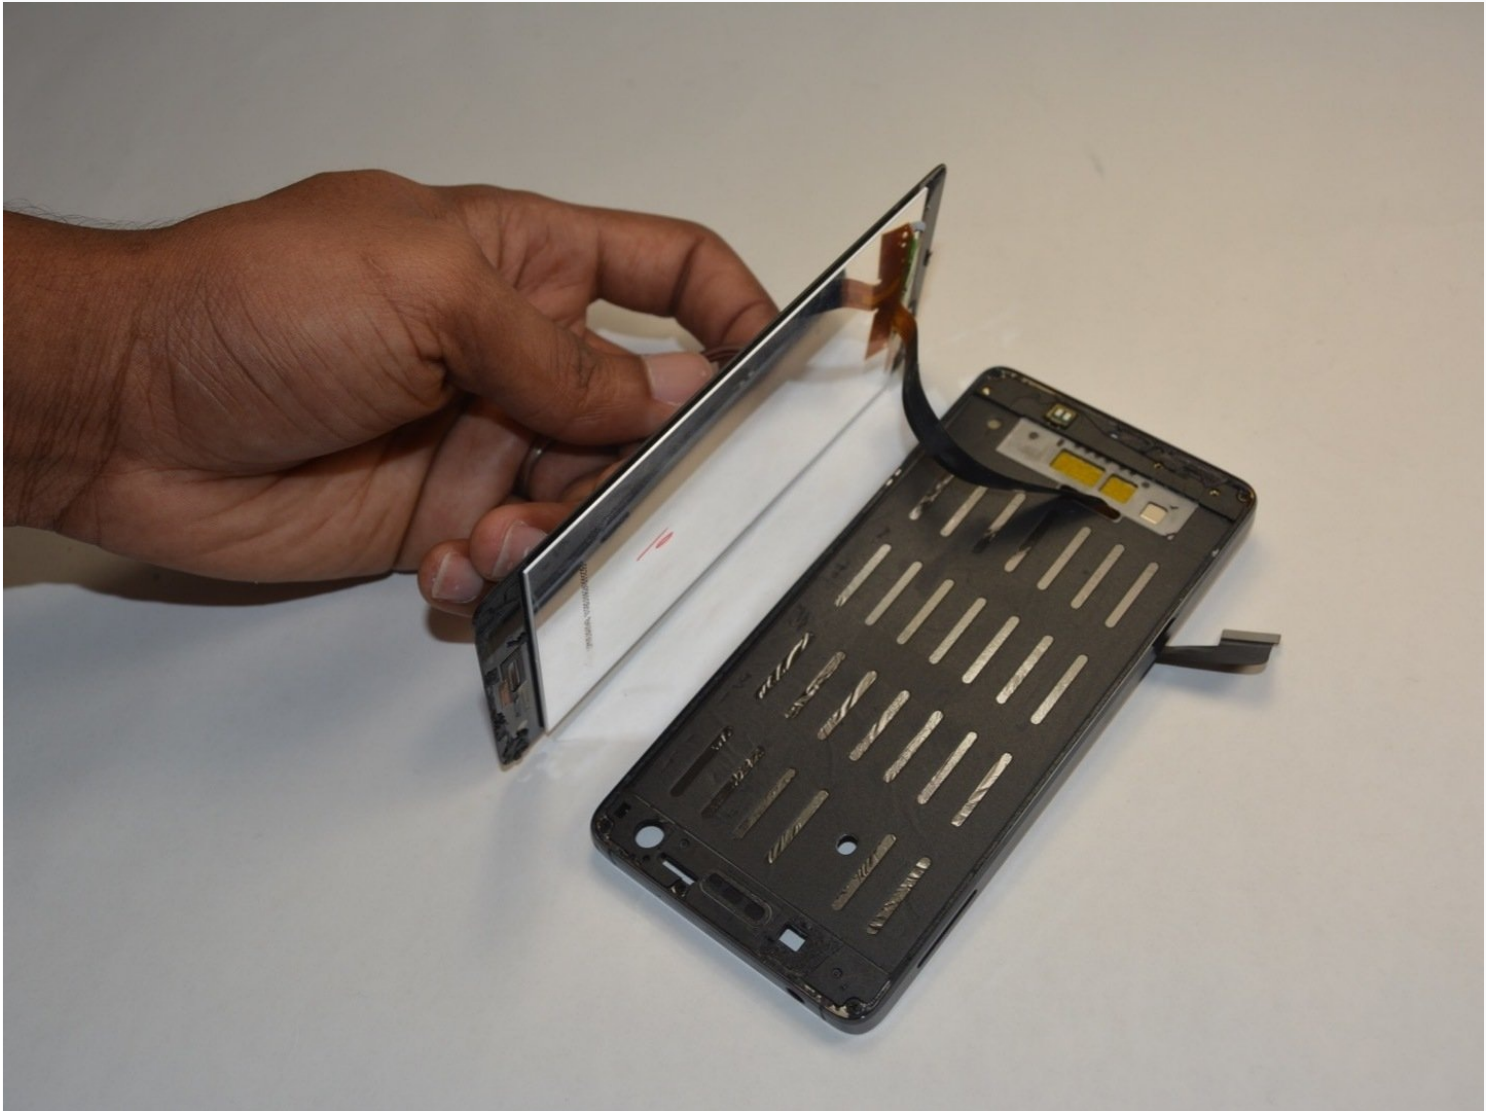

INTRODUCTION

The Xiaomi Mi 4 has a liquid crystal display (LCD) screen that is very fragile and has a high chance to crack if the phone is dropped or struck too hard. In such cases, the screen is unable to be repaired and must be replaced. This will involve removing the device's back cover, battery, and motherboard before detaching the screen.

🔧 TOOLS:

[3.0 Phillip's Head Screwdriver](#) (1)

[Magnetic Project Mat](#) (1)



[Metal Spudger Set](#) (1)

[iFixit Opening Tool](#) (1)

[Suction Handle](#) (1)

[Tweezers](#) (1)

Step 1 — Rear Case/Midframe

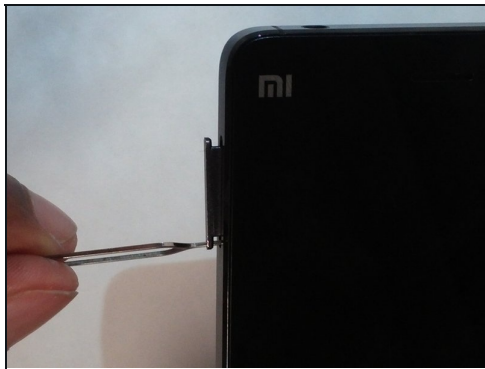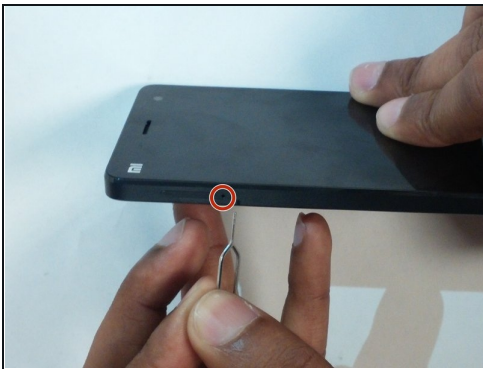

⚠️ Check to make sure that the device is powered off.

- Use a pin or paper clip to insert in the hole on the side of the phone next to the micro SIM cardholder to remove the tray.
- Remove the SIM card tray from the Xiaomi Mi 4 and store it somewhere safe.

Step 2



- Using the flat [metal spudger](#) and curved metal spudger, make a wedge between the plastic back cover and the inner frame
- Using the second spudger, slowly work your way around the perimeter of the device
 - ⓘ Listen for clicking sounds as you are prying the back cover away from the frame
- As the back cover is almost completely removed, use the suction-cup tool to remove the plastic cover without damaging the back

Step 3




- Use a 000 Phillips head screwdriver to remove the 10 1.2mm Phillips head screws in the plastic frame that hold the motherboard and battery.
- Use a 000 Phillips head screwdriver to remove the 3 0.5mm Phillips head screws in the plastic frame that hold the motherboard and battery.
- Use the small plastic opening tool and place it in the slot on the bottom right corner of the inner frame and carefully pry it off.

Step 4 — Battery




- Use [tweezers](#) to gently disconnect the connections that run across the battery and are connected to the motherboard.
- Proceed to gently remove the tape like connector from the battery until it is completely off.
- Use tweezers to disconnect battery's wire from the motherboard.

Step 5

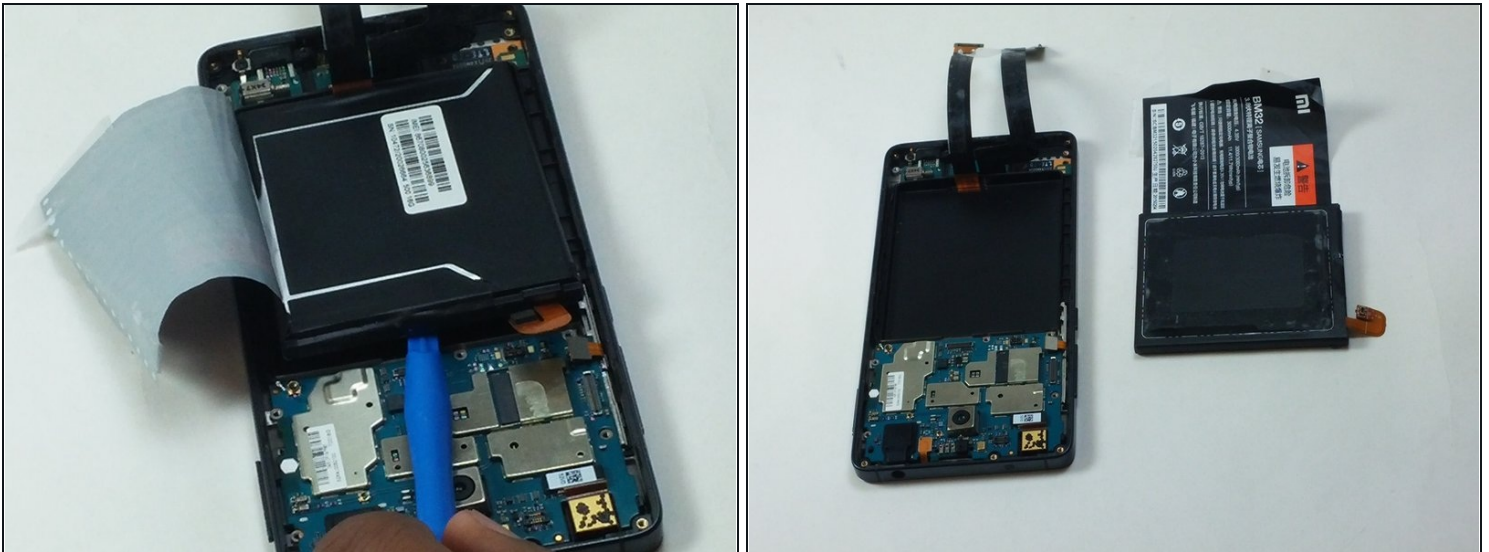



- Use the plastic opening tool to gently pry the battery out of its casing for removal.

Step 6 — Motherboard

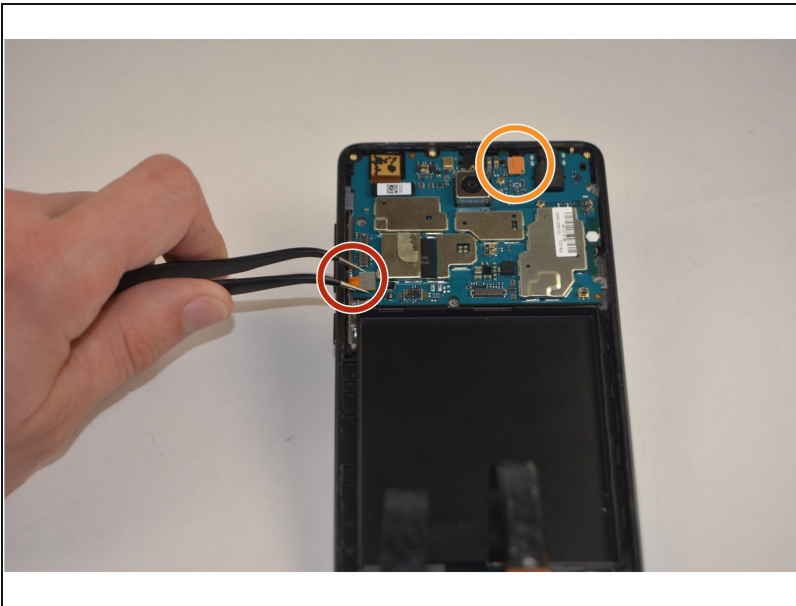


- With the battery removed locate the left-hand cable connected to the motherboard. With the [tweezers](#), firmly grasp the wires of the connector and gently disconnect the cable from the motherboard.
- Find the other cable connecting the motherboard to the device at the top right-hand side of the phone, and carefully use the tweezers to remove that as well.

Step 7

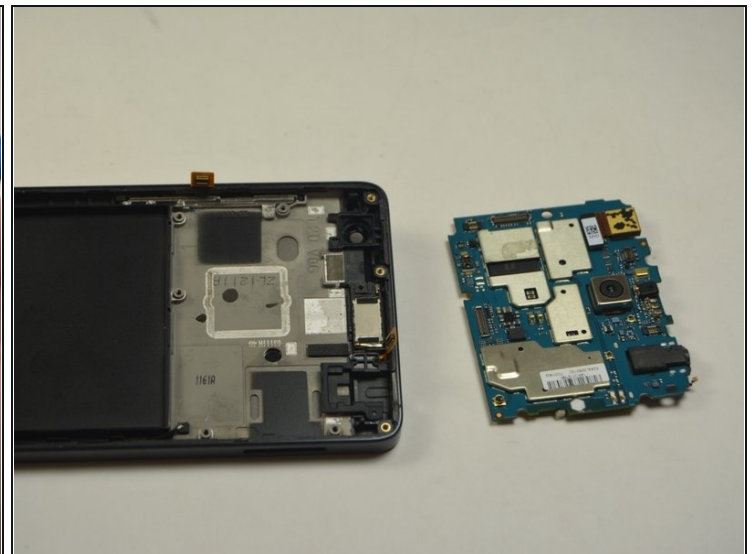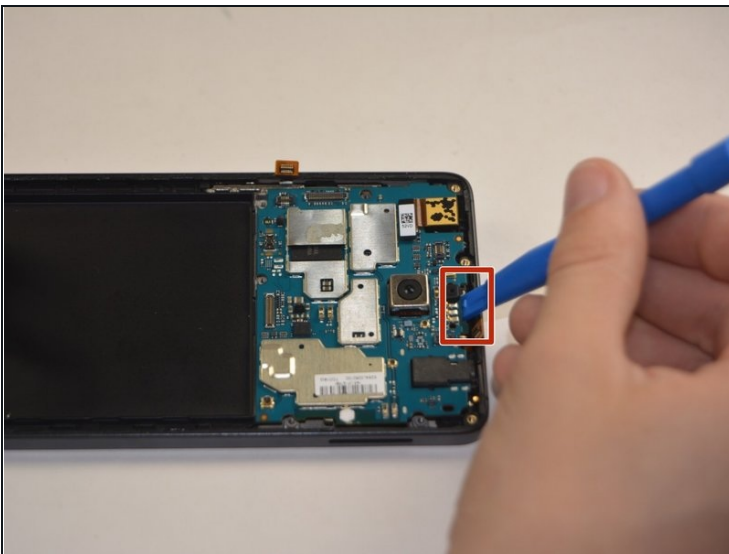


- Wedge the plastic opening tool, between the motherboard and the inner region of the phone in the slot atop the motherboard.

Step 8 — Display Assembly

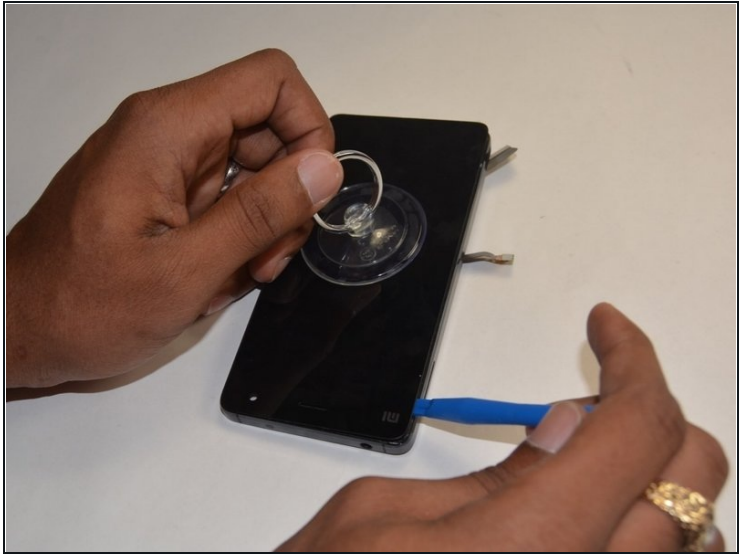

- After removing your device's back cover, battery, and motherboard, turn your phone over to start removing the LCD screen.
- Start by fixing the suction cup firmly on the screen. Then wedge a plastic opening tool around the perimeter of the screen while maintaining a pulling force on the suction cup.

Step 9

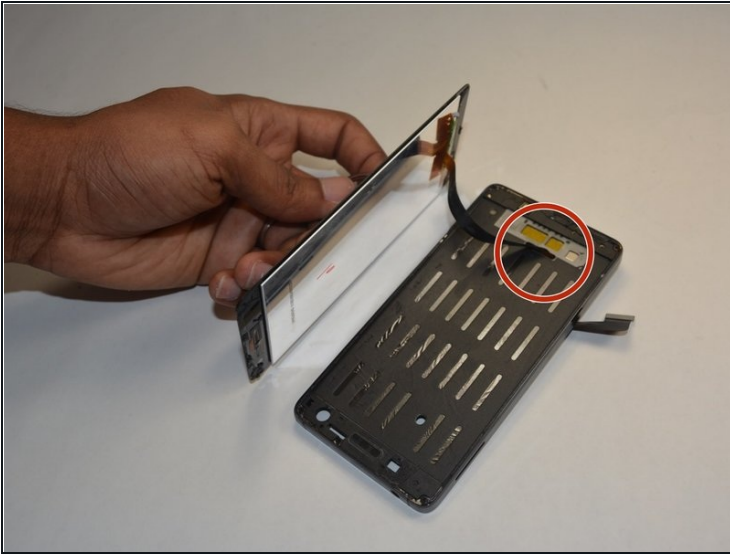

- Once you have pulled the screen completely off the device, there will be a ribbon wire that you previously detached from the motherboard that can be pulled gently through a hole.
- Make sure you carefully dispose of the LCD screen if it is cracked in any way as to not be cut from the glass shards it may contain

To reassemble your device, follow these instructions in reverse order.