

Bose SoundLink Mini Front/Back Protective Grille Replacement

Guide to removing and replacing the front and back protective grilles on the Bose SoundLink Mini speakers.

Written By: Jordan Smith



This document was generated on 2020-11-26 05:57:57 PM (MST).

INTRODUCTION

Use this guide to replace the front or back mesh grilles. Make sure you have the required tools. The first time you remove a grille might be a little difficult due to some glue holding it in place. Be careful when removing, as the grille may bend easily.



TOOLS:


• Metal Spudger (1)

Step 1 — Front/Back Protective Grille



- Insert the Metal Spudger between the rubber edge on the grille and the aluminum casing.
- i Place Metal Spudger in the location shown.

Step 2

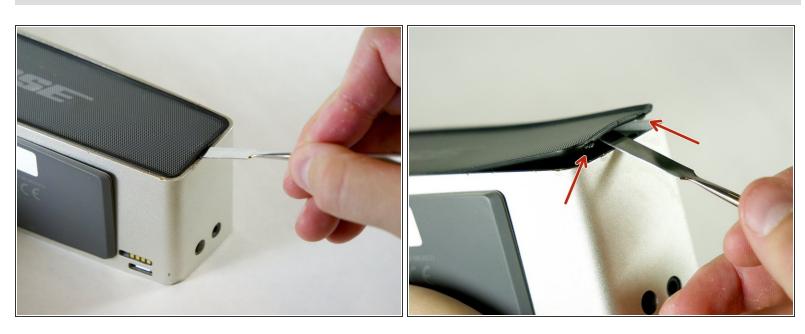

Slowly pry up the grille until the two tabs shown pop out.

↑ Be very gentle, the grille will bend.

Step 3





The grille is attached to the speaker with double sided sticky tape. To remove the grill gently pull
upward while keeping tension to the right.

♠ Be very gentle, the grille will bend.

Step 4





Repeat steps to remove the back grille.

To reassemble your device, follow these instructions in reverse order.