



TI-30-XB Battery Replacement

Remove and replace the battery for the TI-30-XB

Written By: Jordan Dann



INTRODUCTION

Follow this guide to remove and replace the battery for the TI-30-XB



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Jimmy](#) (1)



PARTS:



- [CR2032 Lithium Battery](#) (1)

Step 1 — Open the device



- Remove the 6 screws on the back.


Step 2 — Eject the battery

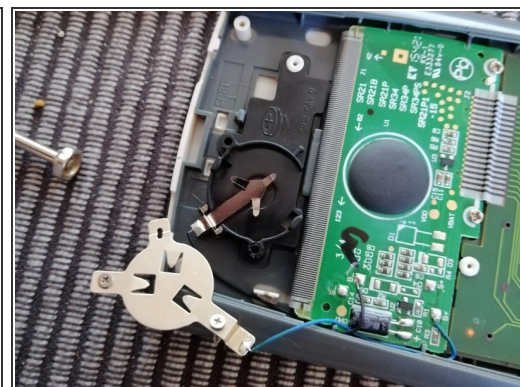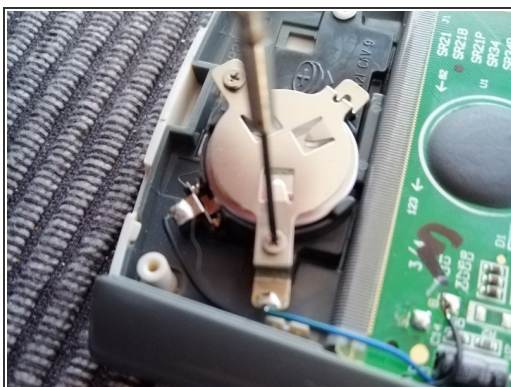

- Remove the 2 screws holding the battery
- Eject the battery

Step 3 — Finish up



 Make sure you put back in the correct battery! Check the old battery's type/ code and buy such one. **Never** buy a different type of battery.

- Put the new battery in.

Step 4



- Replace the back plate and screw the 6 screws back in.

To reassemble your device, follow these instructions in reverse order.