



Asus EeeBook X205TA Screen Assembly Replacement

This guide will help you replace the screen assembly of your Asus EeeBook X205TA.

Written By: Lorena Santiago



INTRODUCTION


This guide will help you replace your Asus EeeBook X205TA screen in case the screen is broken, damaged or worn out. If disposing of the screen, please follow the laws and regulations for proper disposal.

This guide only covers removing the entire LCD screen assembly.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #2 Screwdriver](#) (1)
-

Step 1 — Screen Assembly

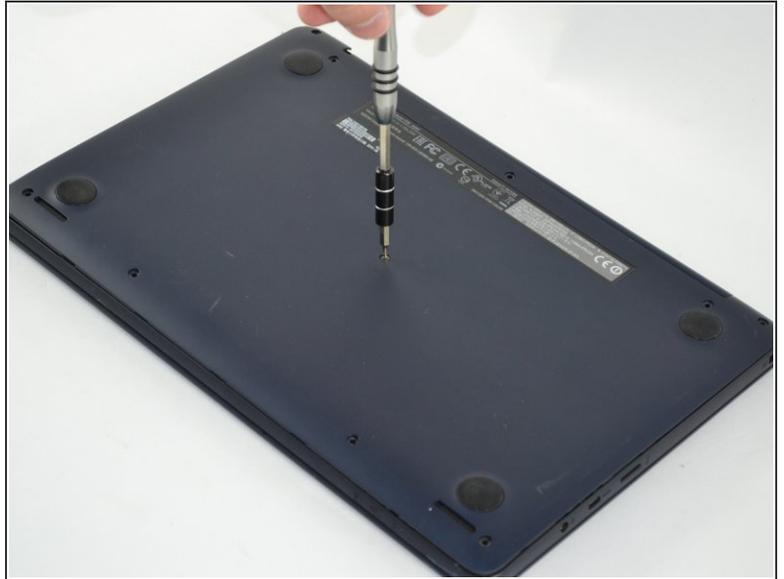


- Unscrew all 10 screws located on the bottom of the laptop using 2mm Phillips Screwdriver.
- ⓘ Keep in mind that some of the screws vary in length, so keep track of which screws were placed in each hole.

Step 2



- Insert the plastic opening tool in the crevice between the back of the laptop and the rest of the case.
- Carefully pry open the case from several points.
- ⓘ Slowly remove the back of the laptop, revealing the parts inside.

Step 3

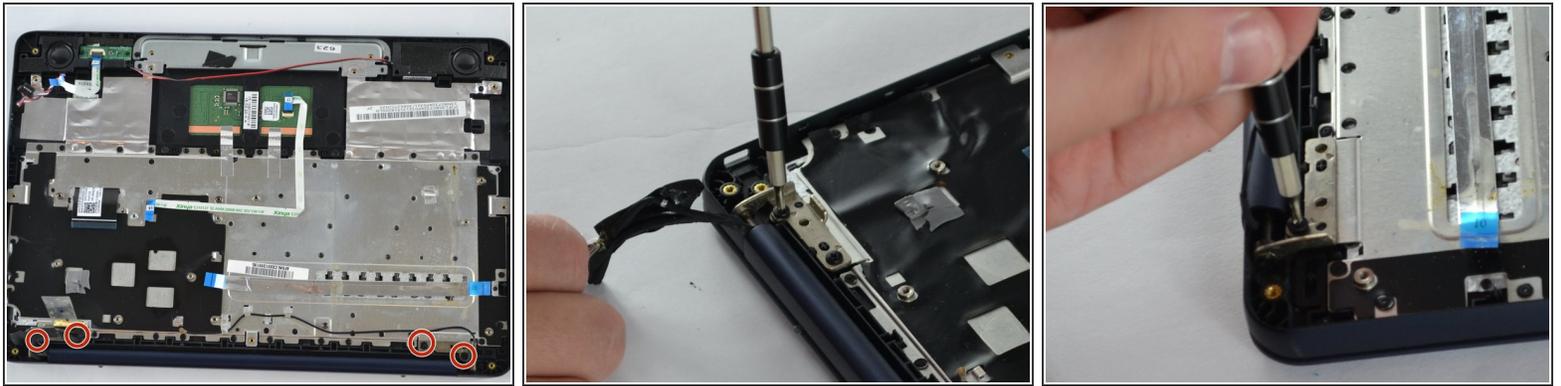

- Unscrew the four screws using Philips #2 screwdriver that connect the screen to the inside of the case for the laptop.

Step 4



- Unplug the No-Fuss Ribbon connector of the screen from the motherboard.
- ⓘ Carefully lift the screen away from the case.

To reassemble your device, follow these instructions in reverse order.