




Blackberry Bold 9000 Trackball Replacement

Follow this guide to replace an unruly trackball.

Written By: Kelly

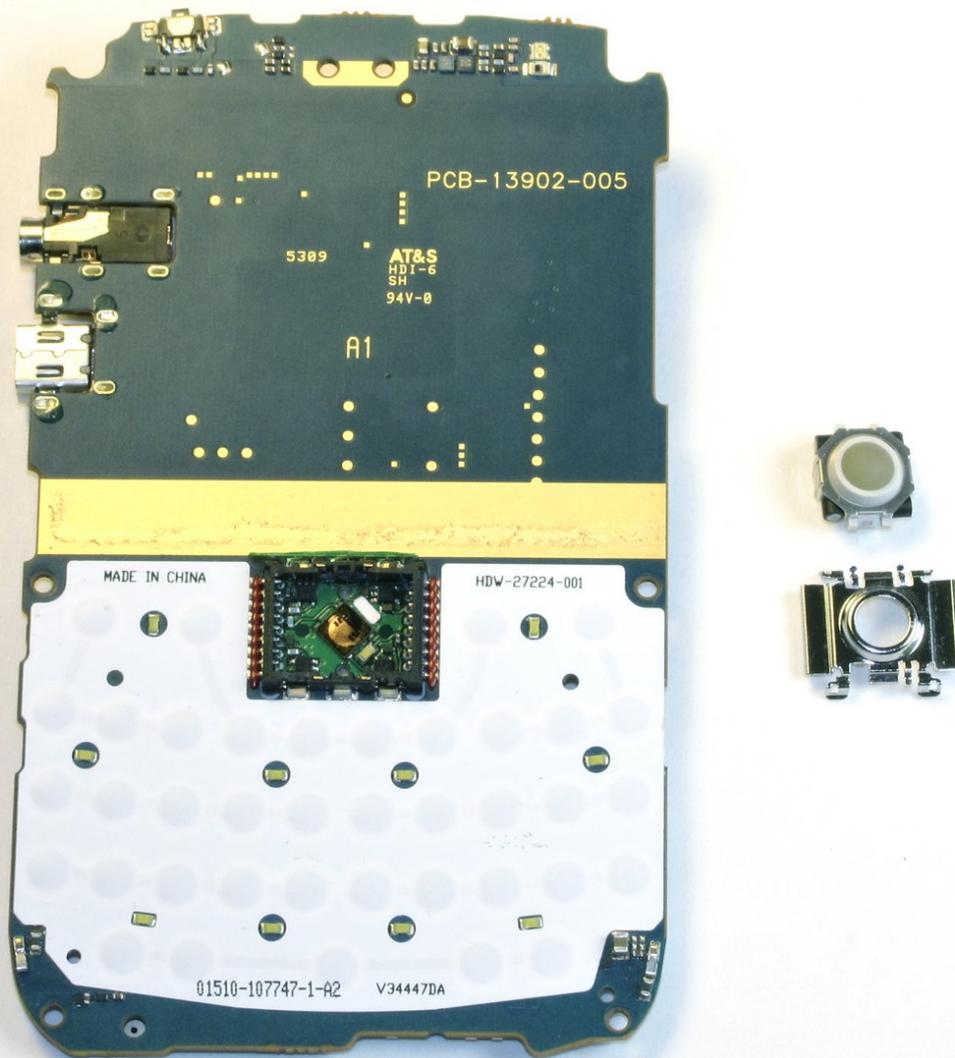

 **TOOLS:**

- [Spudger](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Place your BlackBerry facedown in front of you.

Step 2



- Press the cover release button on the bottom of your device. Lift and remove the back cover.

Step 3



- From the top, use your fingernail to lift the battery out.

Step 4 — Rear Case




- Remove the SIM card.

Step 5



- Remove the six 7.0mm Torx screws securing the rear case to the rest of the phone.

Step 6

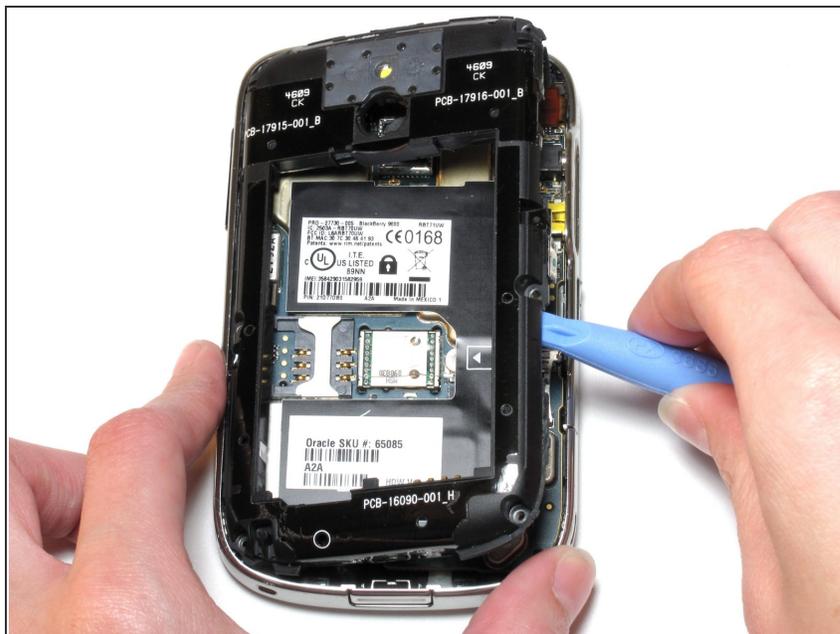


- Use the plastic opening tool to remove the rear case.

Step 7 — Trackball




- Using the same plastic opening tool, lift out the motherboard assembly.
- Remove the motherboard assembly from left to right, using caution near the audio jack on the right side of the device.

Step 8

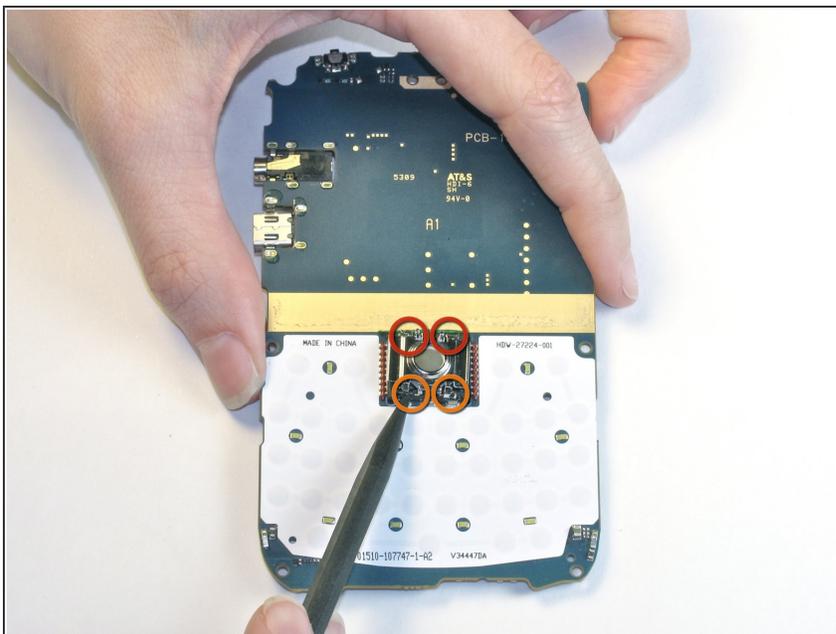

- Using a spudger, pry the top of the metal casing off. There are two pins holding it in place; it should pop off easily.
 - Repeat to the bottom.
- i** This step requires pristine dexterity. Try to find a friend with smaller fingers if necessary.

Step 9

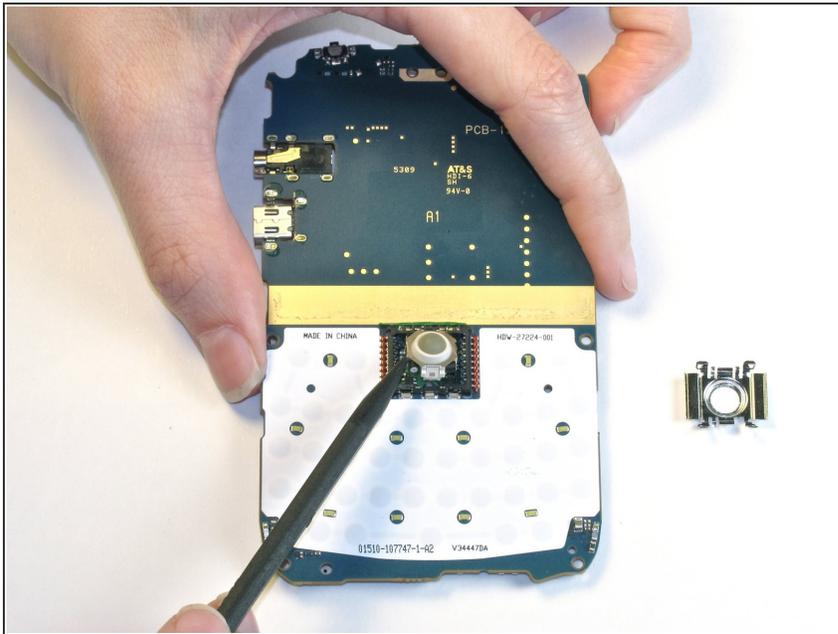

- Lift the trackball out of its socket.

To reassemble your device, follow these instructions in reverse order.