




Panasonic ARC ES-LT3N Battery Replacement

Replace your dead battery and bring back efficient performance to your Panasonic ARC ES-LT3N

Written By: Andrew Trainor

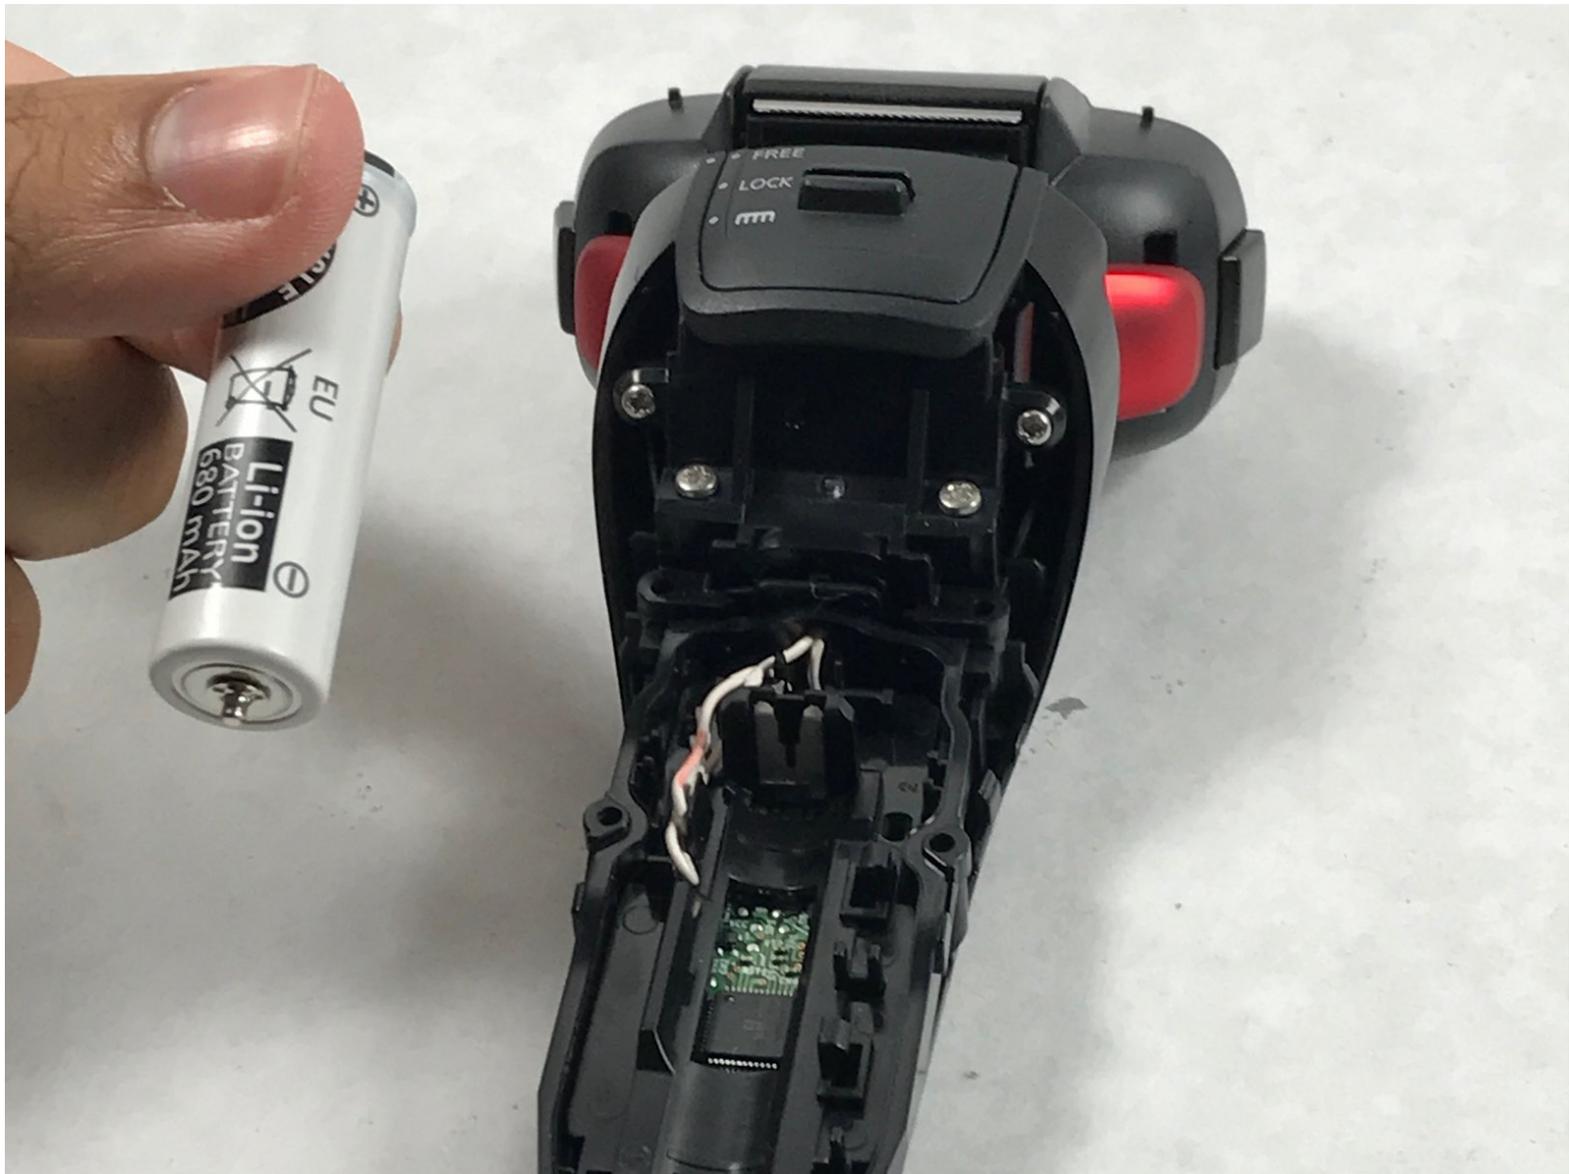

INTRODUCTION

This repair guide will show you the best step by step procedure of how to replace your battery in your Panasonic ARC ES-LT3N. The process is fairly easy and you only need a one tool!

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Casing



- Flip the razor over so the back is facing you.

Step 2




- Using a Phillips #00 screwdriver, remove the 6 mm screw just above the charger port.

Step 3




- Slide the plastic cover at the bottom of the razor downward to remove.

Step 4

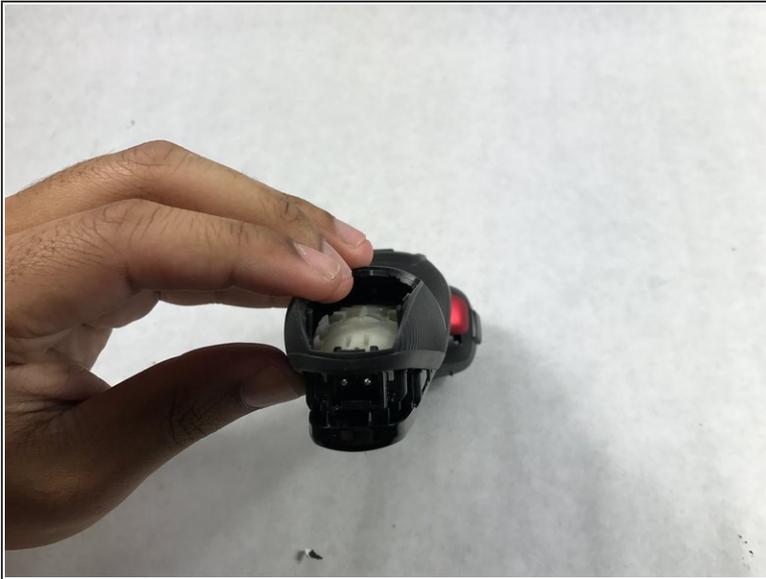


- Lift up the rear casing from the bottom of the razor.
 - ⓘ This may require you to gently pry it apart with your fingers.
 - Lift up the rear casing from the sides of the razor.
 - Pull rear casing up and off razor.
- ⚠ Be careful not to break any plastic!

Step 5 — Battery

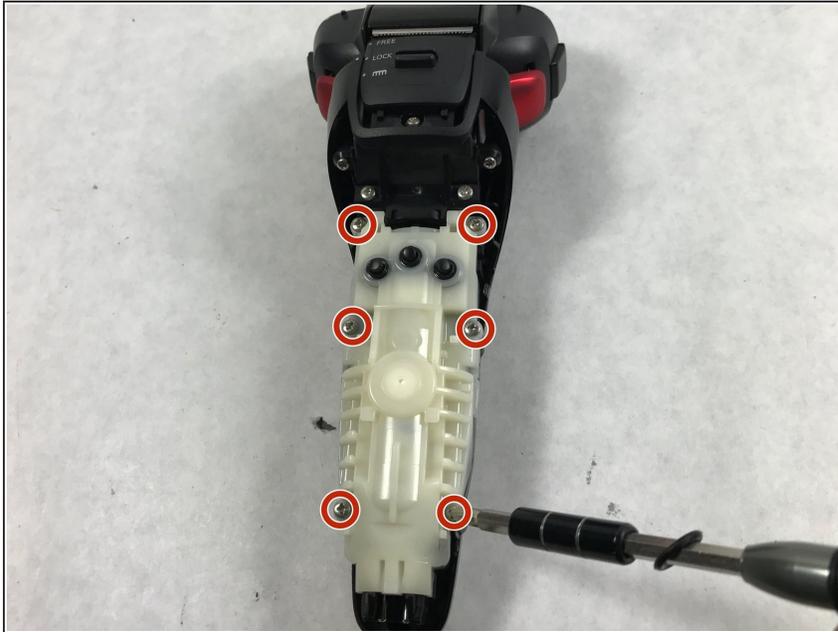


- Using the Phillips 00 driver bit, remove six screws (12mm) from the battery case.

Step 6

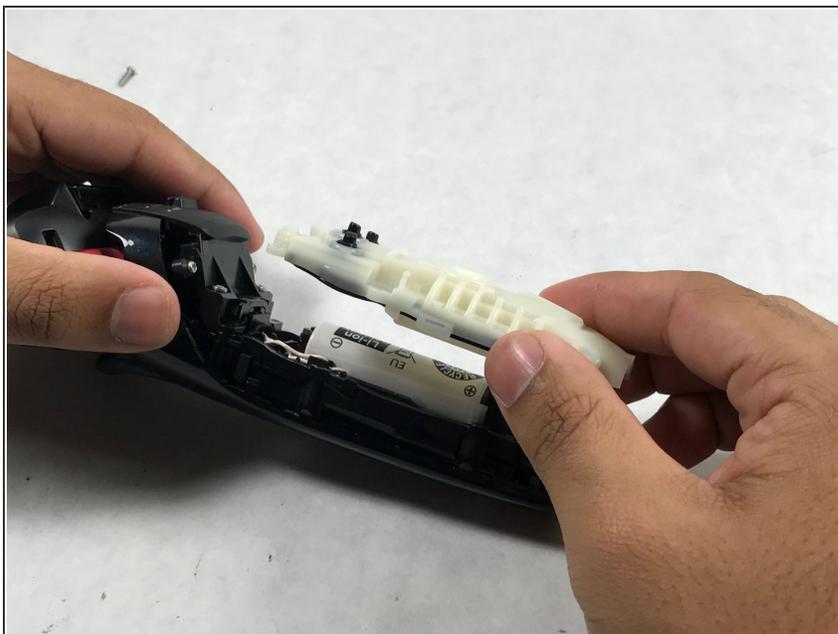

- Remove battery case.

Step 7

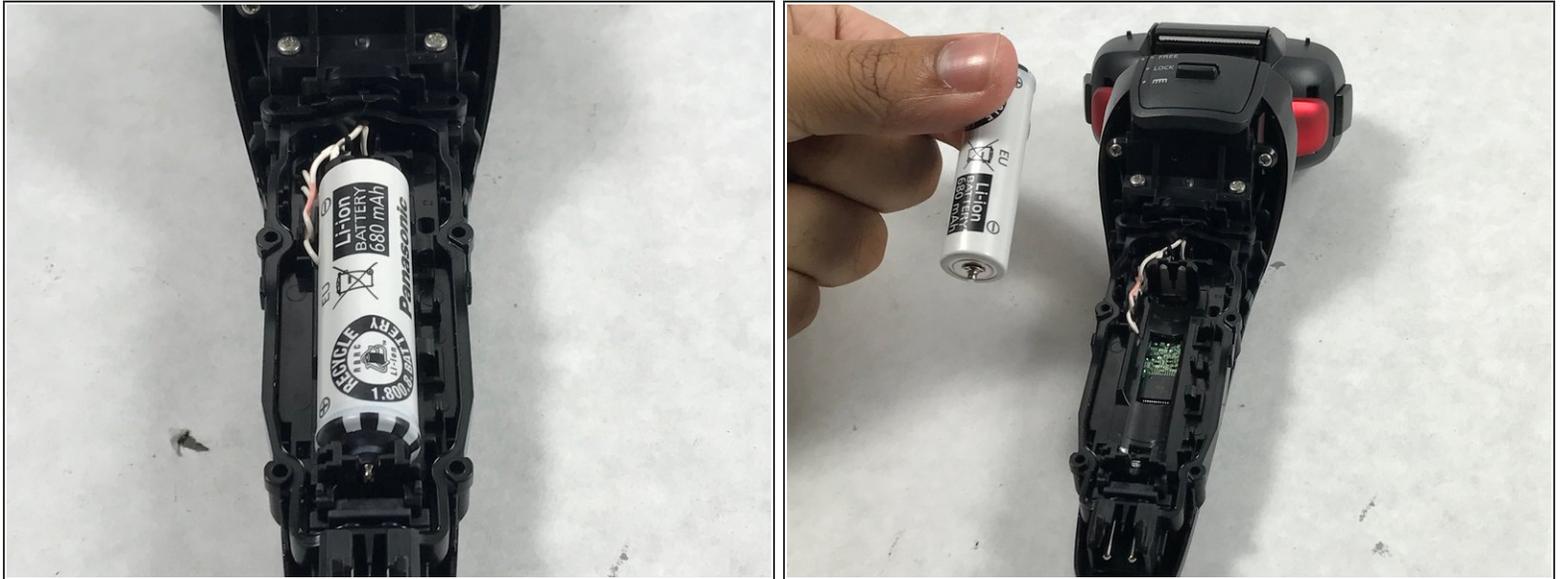

- Remove old battery by lifting the battery up and left.
- ⓘ There are plastic brackets holding the battery on the right. Removing up and left ensures that the brackets will not be damaged and the battery will not come loose.

To reassemble your device, follow these instructions in reverse order.