




# Asus EeeBook X205TA Speakers Replacement

A guide on how to replace the speakers in an Asus EeeBook X205TA.

Written By: William Riggins

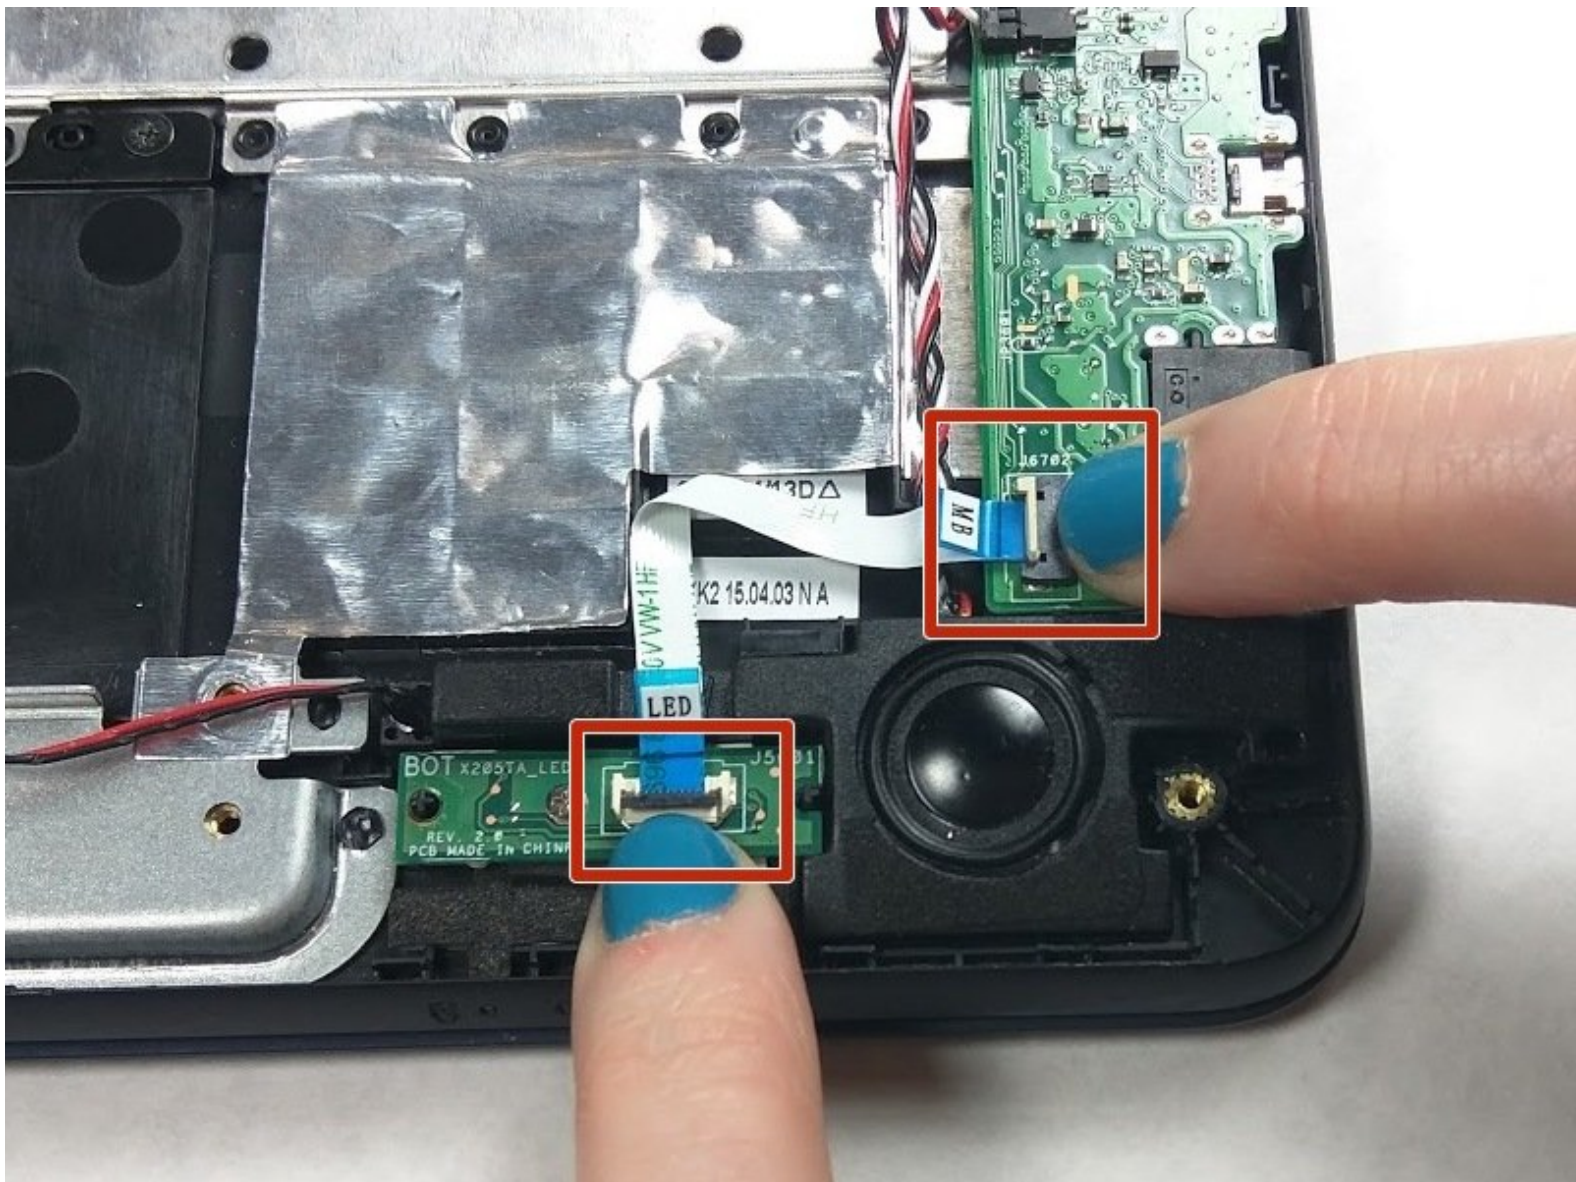

---

# INTRODUCTION


In this guide you will learn how to replace the speakers in an Asus EeeBook X205TA.

---

## TOOLS:

- [iFixit Opening Tools](#) (1)
  - [iFixit Precision Bit Driver](#) (1)
  - [Phillips #2 Screwdriver](#) (1)
  - [Small Plastic Spudger](#) (1)
-

## Step 1 — Battery

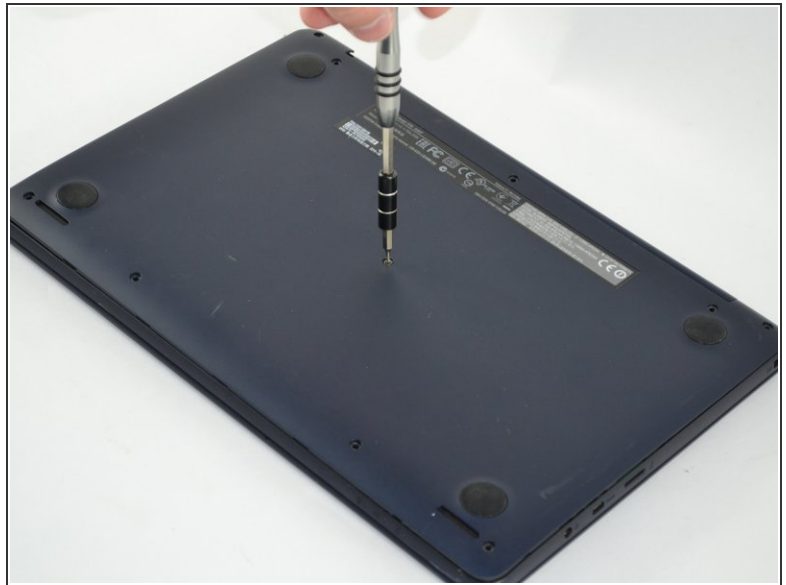

- Unscrew all ten 2mm screws located on the bottom of the laptop using a Phillips #2 screwdriver.

## Step 2



- Insert the plastic opening tool in the crevice between the back of the laptop and the rest of the case.
- Carefully pry open the case from several points.
- ⓘ Slowly remove the back of the laptop, revealing the parts inside.



## Step 3



- Unscrew all six 2mm screws using Philips #2 screws along the edges of the L-Shaped battery.

**i** Any tape or cords that run along the battery should be carefully pushed to the side.

## Step 4




- Disconnect the battery from the motherboard by pulling the No-Fuss Ribbon cables out of the connector.

## Step 5



- Carefully lift the battery out of the laptop.


## Step 6 — Speakers

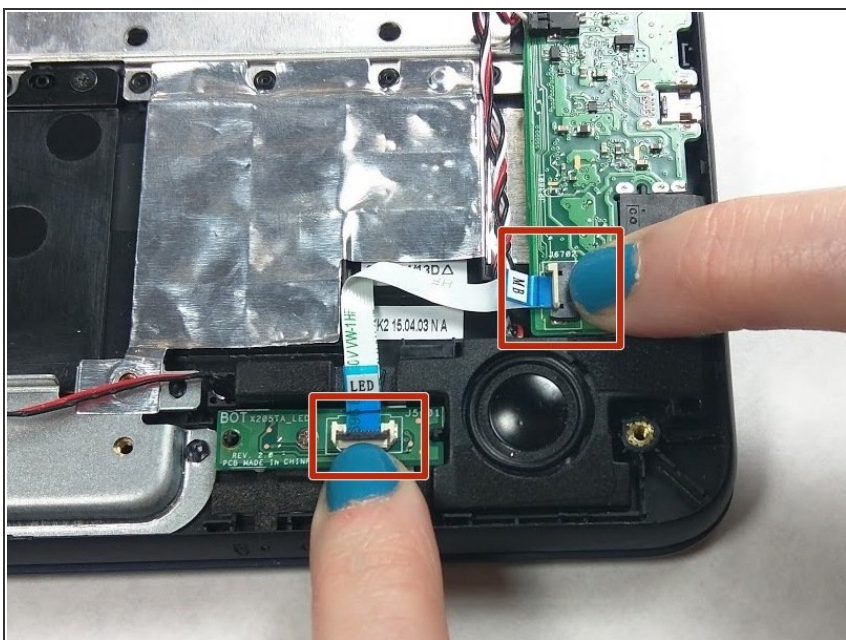

- Locate and lift the tabs from the LED/motherboard ribbon cable.
- Remove the cable.




## Step 7

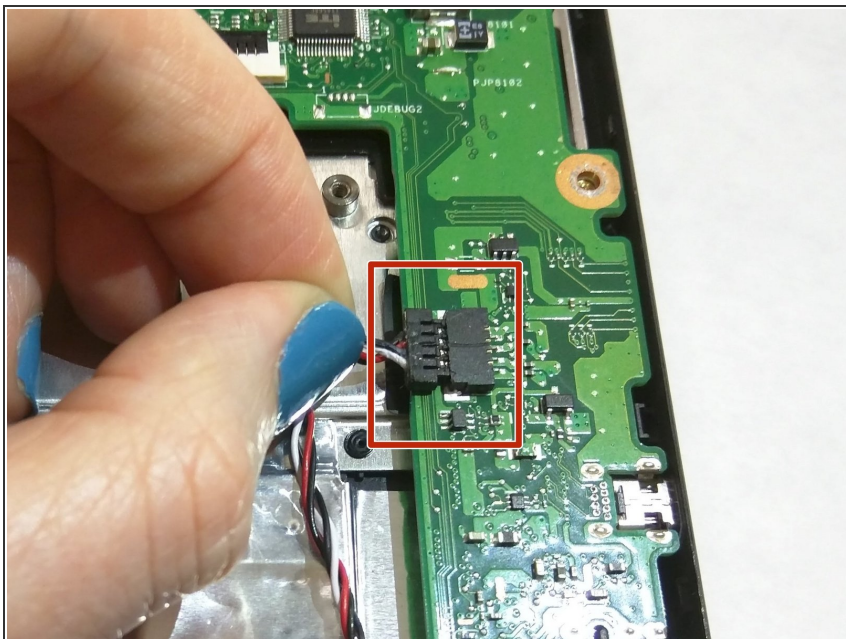


- Unplug the speaker cable from the motherboard.

## Step 8

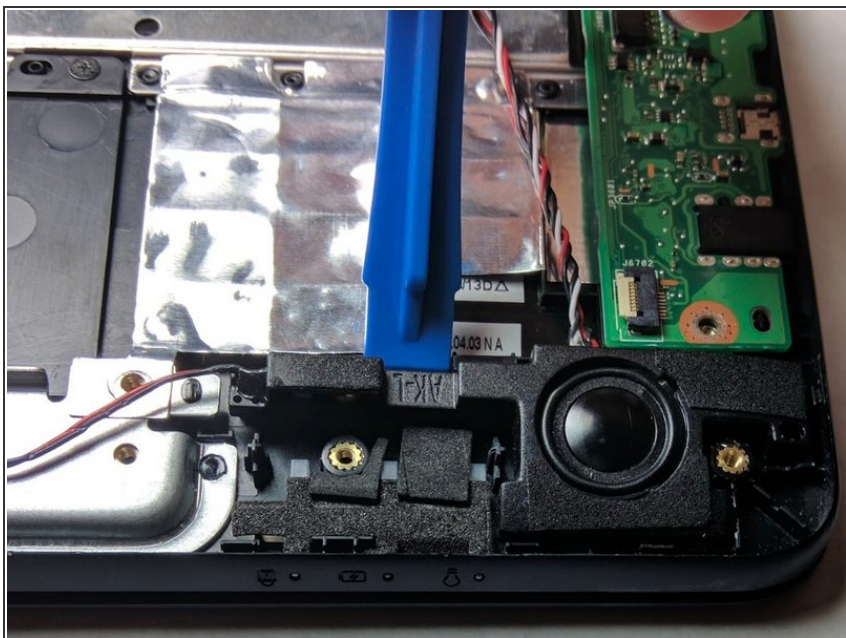

- Pry the right speaker gently with the plastic opening tool.

## Step 9

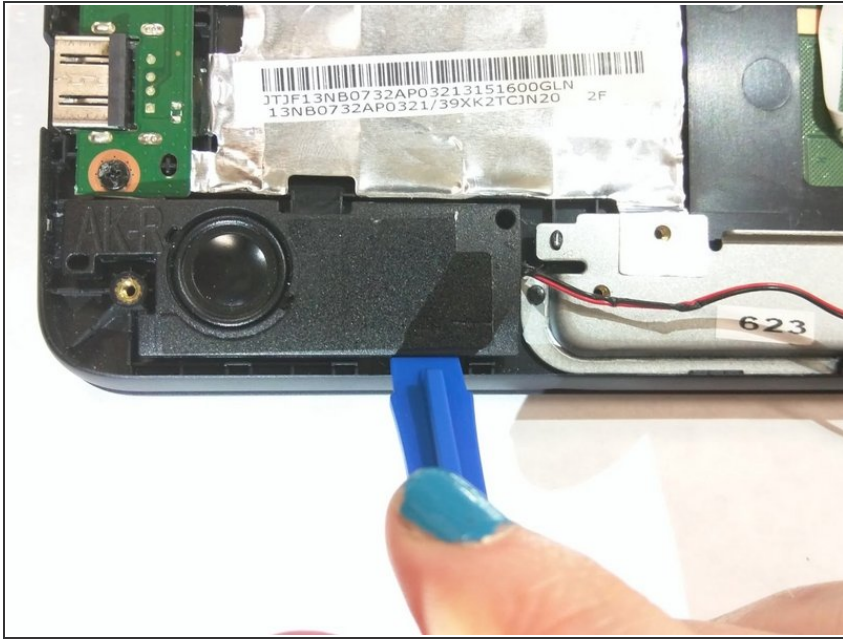

- Pry the left speaker gently with the plastic opening tool.

To reassemble your device, follow these instructions in reverse order.