




P775DM3 CPU Replacement

Written By: Felice Suglia



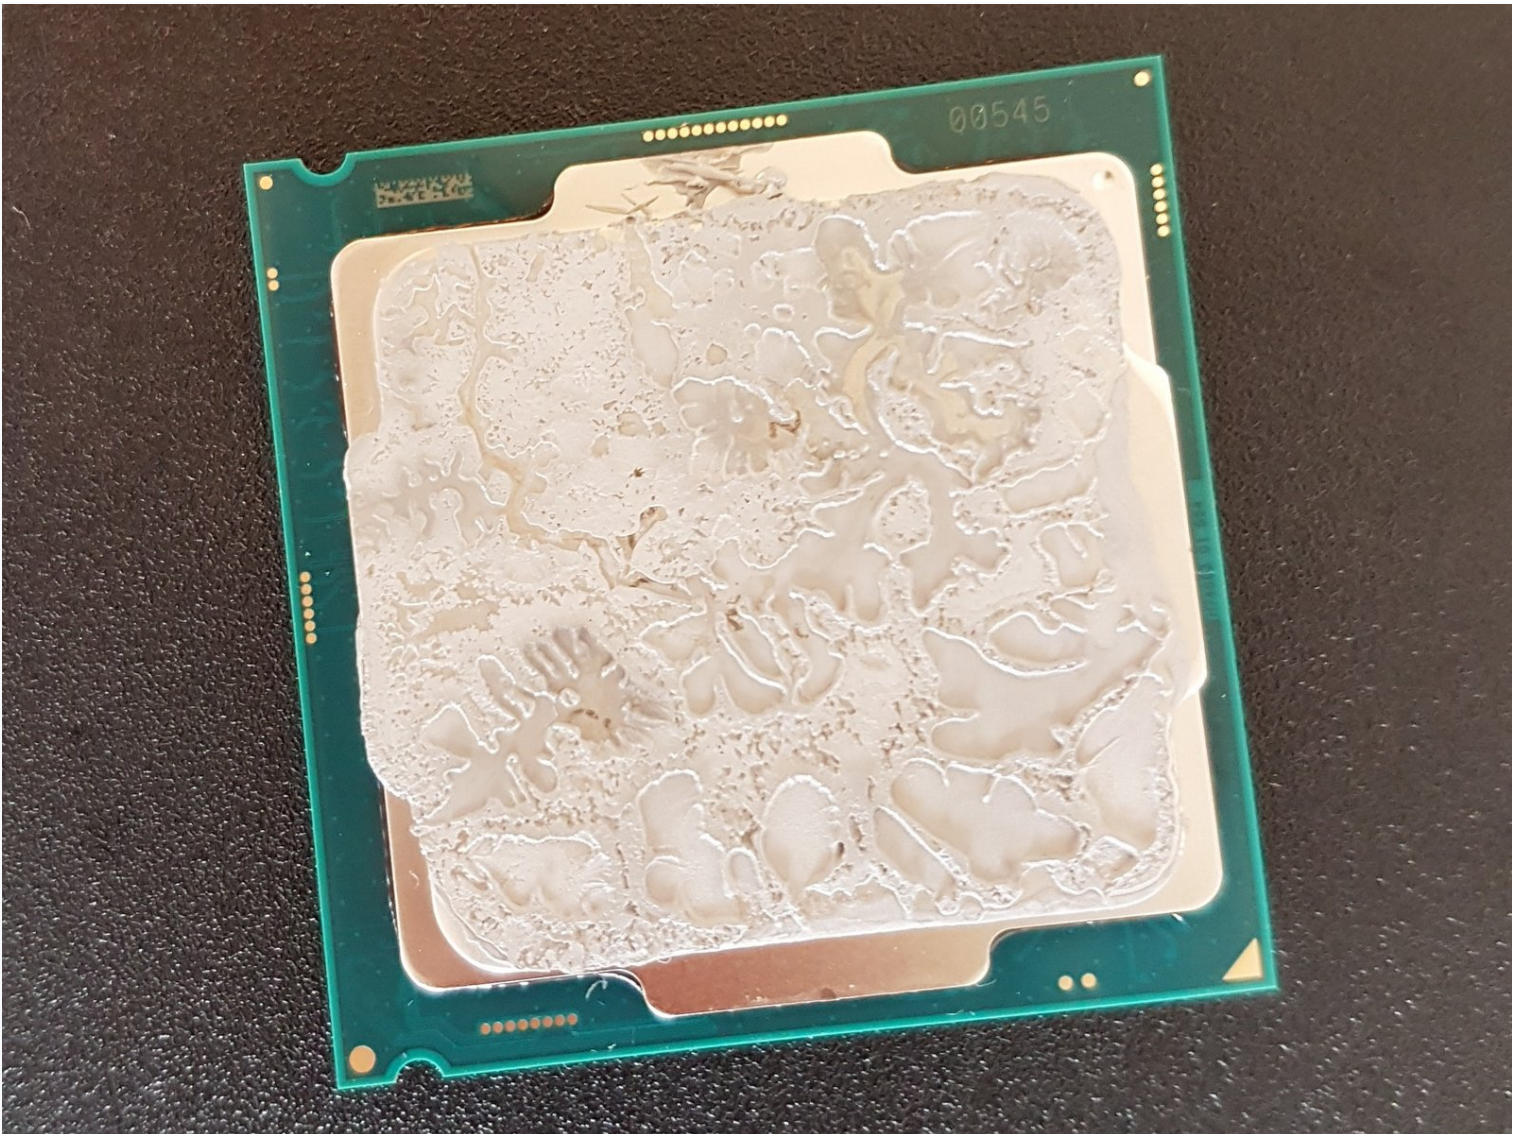

TOOLS:

Phillips #0 Screwdriver (1)

Tweezers (1)





PARTS:

Pièces pour why! P775DM3 CH (1)



Pièces pour why! P775DM3 EU (1)

Step 1 — Battery

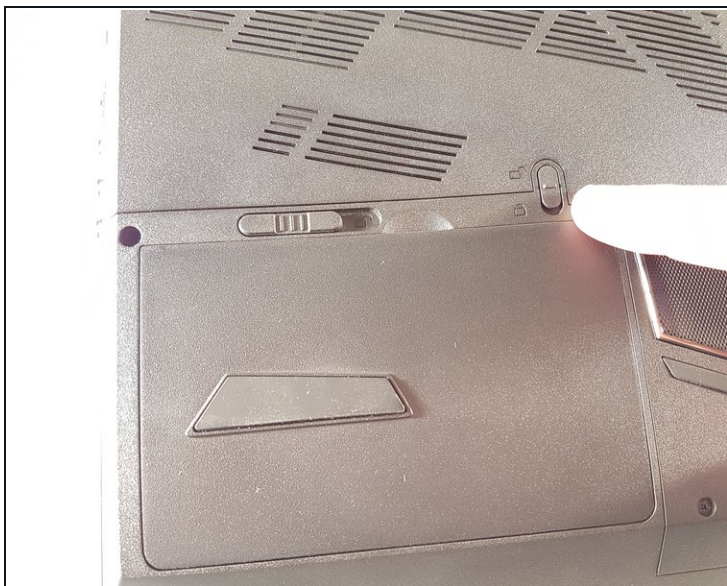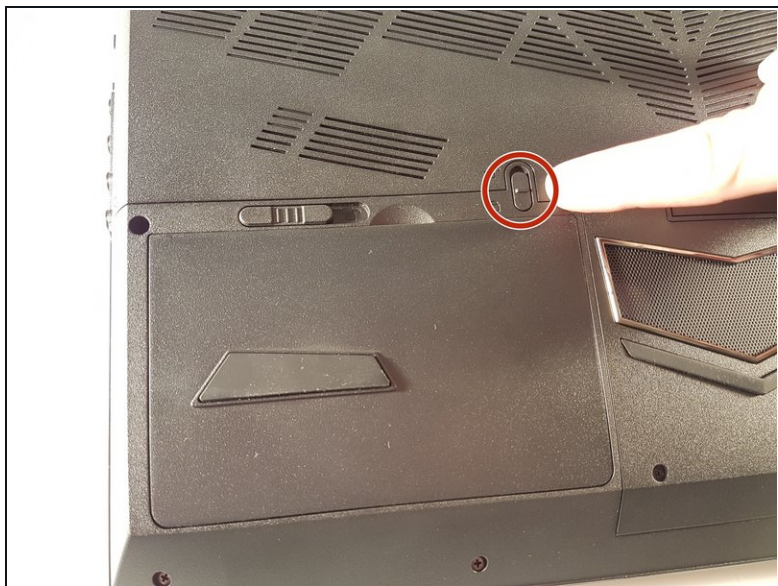

- Unlock the lock circled in red.

Step 2

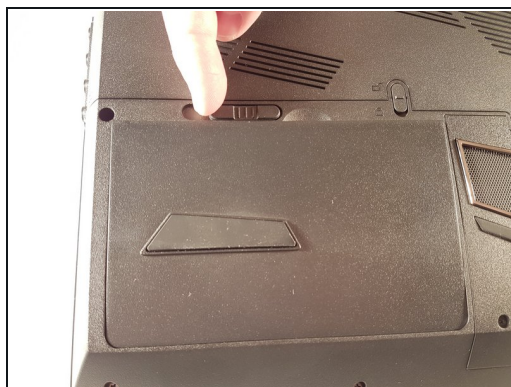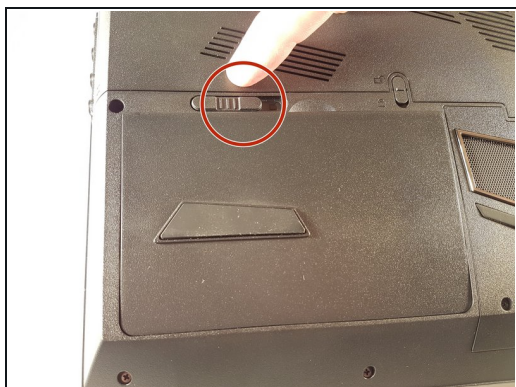


- Lift the battery while unlocking the lock circled in red.

Step 3 — Access to major components




- Unscrew the five screws circled in red.

Step 4

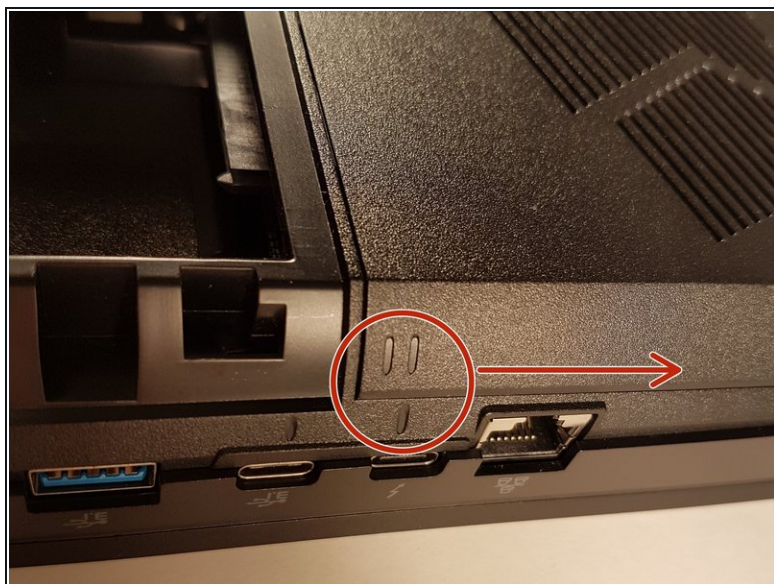




- Slide the plate in the direction of the red arrow.

Step 5

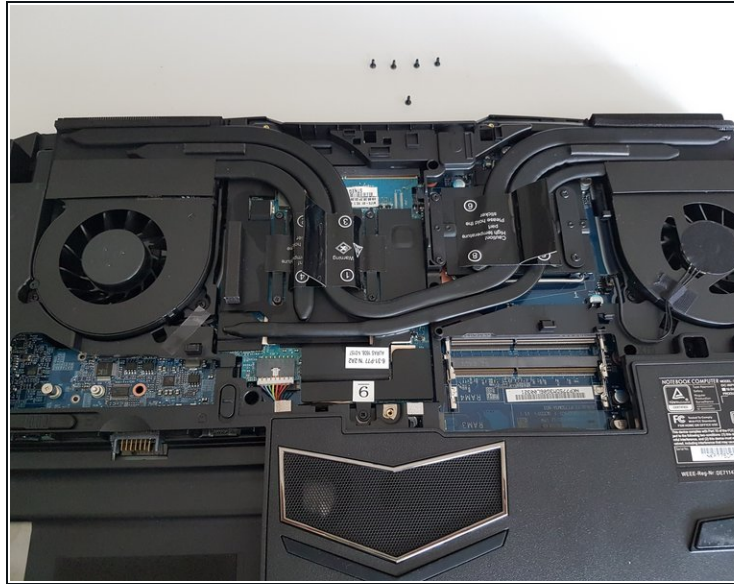




- Lift the plate.

Step 6 — Cooler

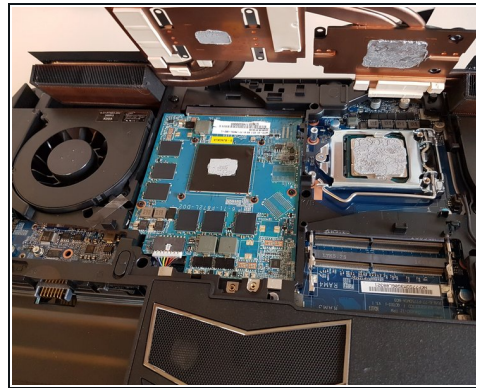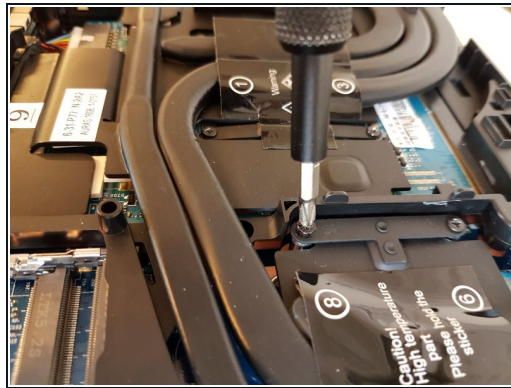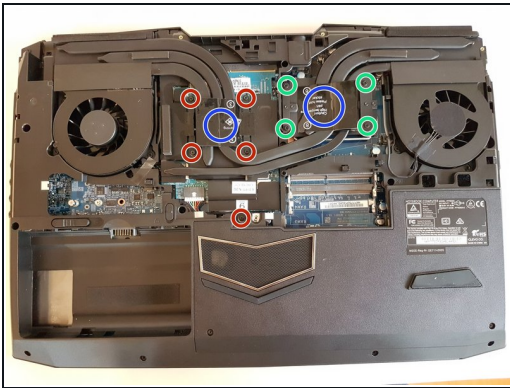

- Unscrew the four large screws circled in green
- Unscrew the five small screws circled in red
- Lift the cooler with the two tabs circled in blue

Step 7 — CPU

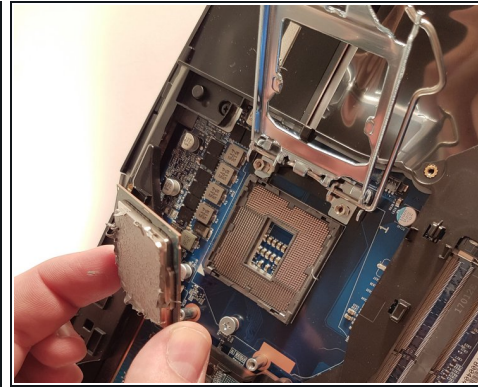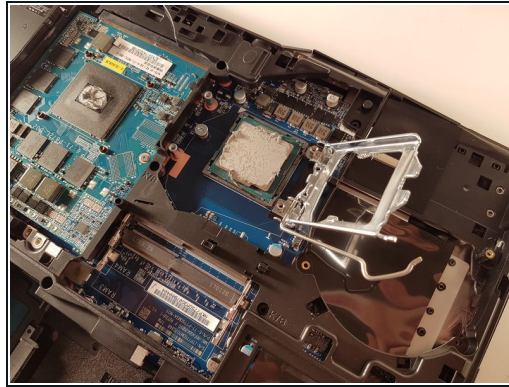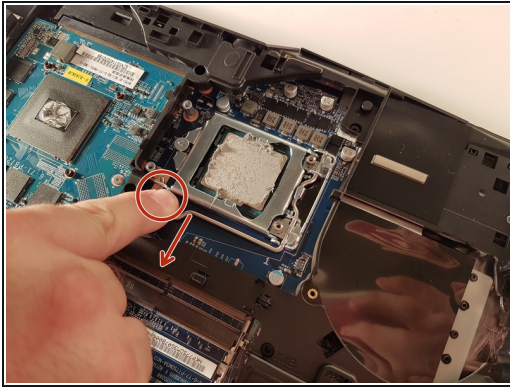

- Pull the lever circled in red in the direction of the red arrow while pressing on it.

⚠ Attention: Don't touch the underside of the processor, pick it up from the sides.

To reassemble your device follow the following instructions in reverse order