




# Dell Vostro 5470 Memory Module Replacement


Written By: Johnathan Hammond

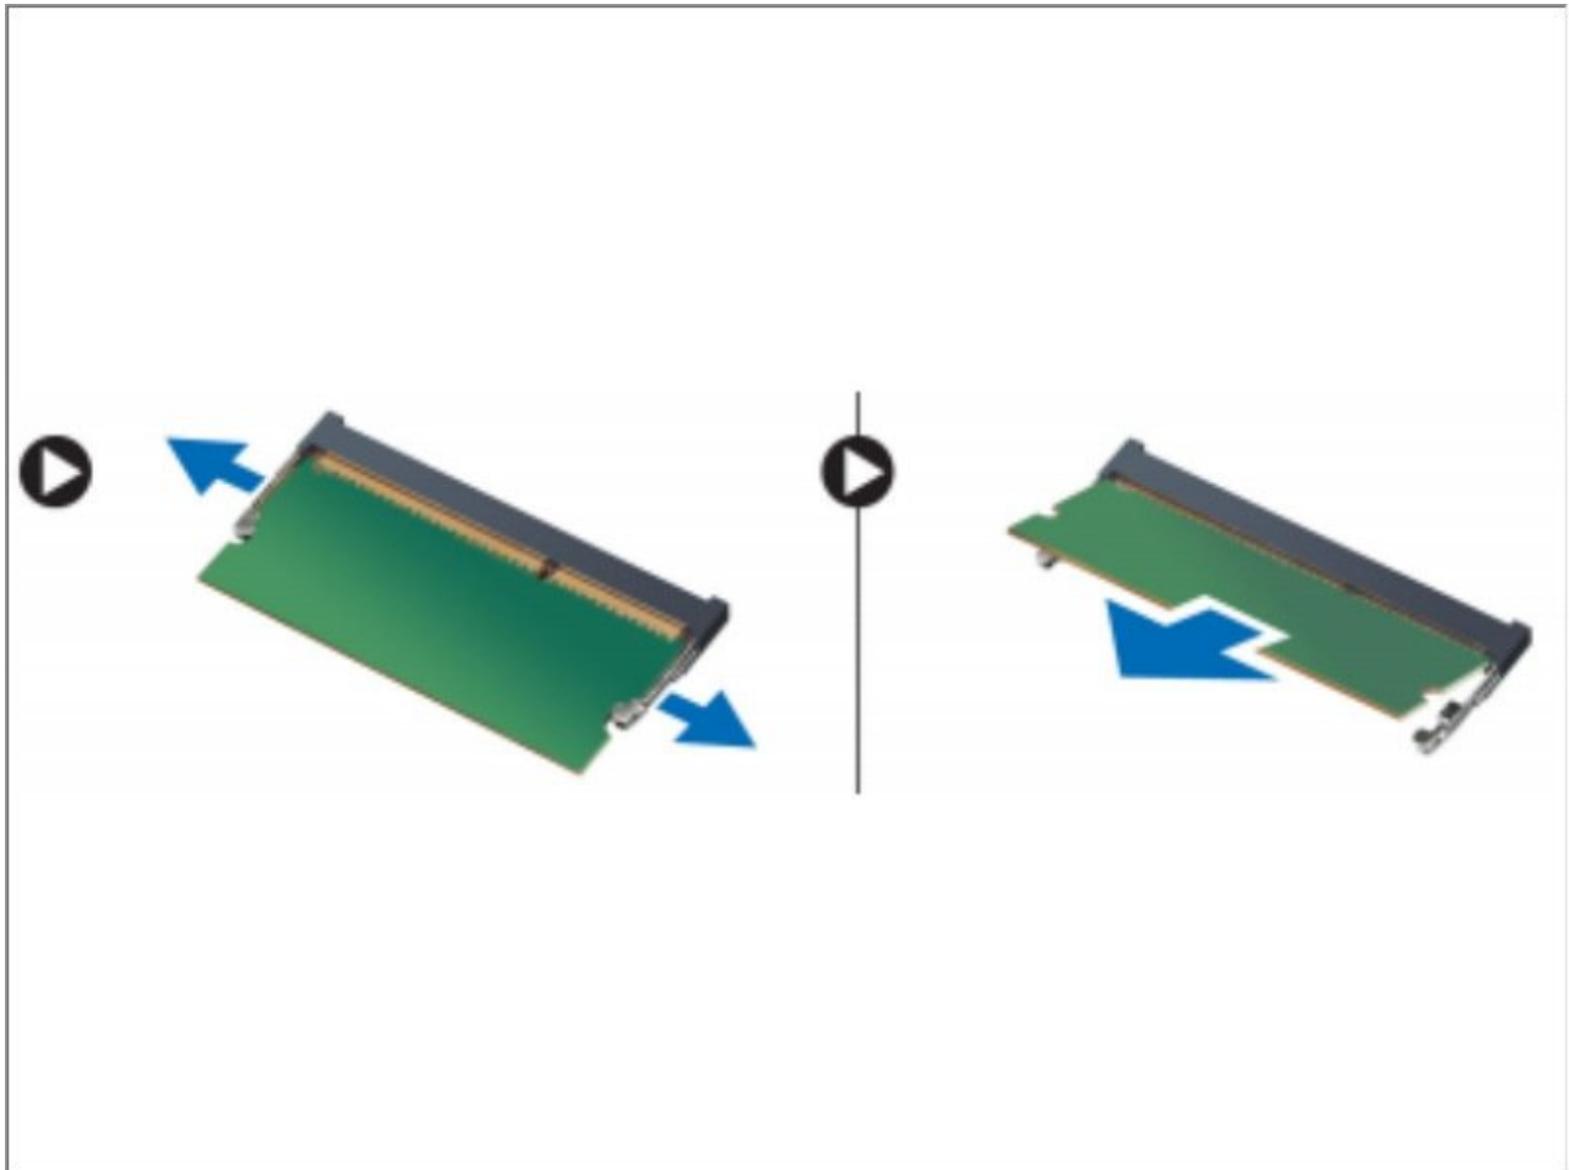

 **TOOLS:**


- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Remove the Screws

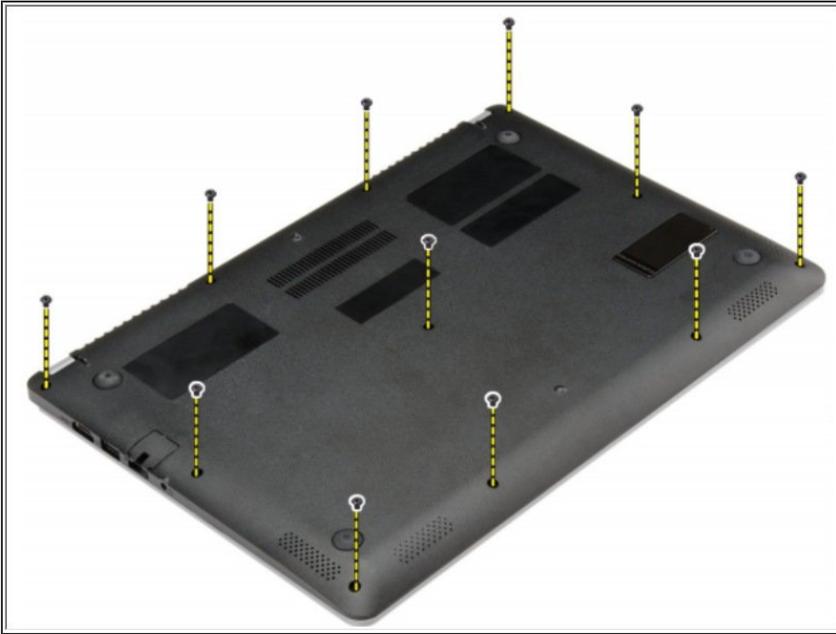

- Remove the screws that secure the base cover to the computer.

## Step 2 — Loosening the Base Cover

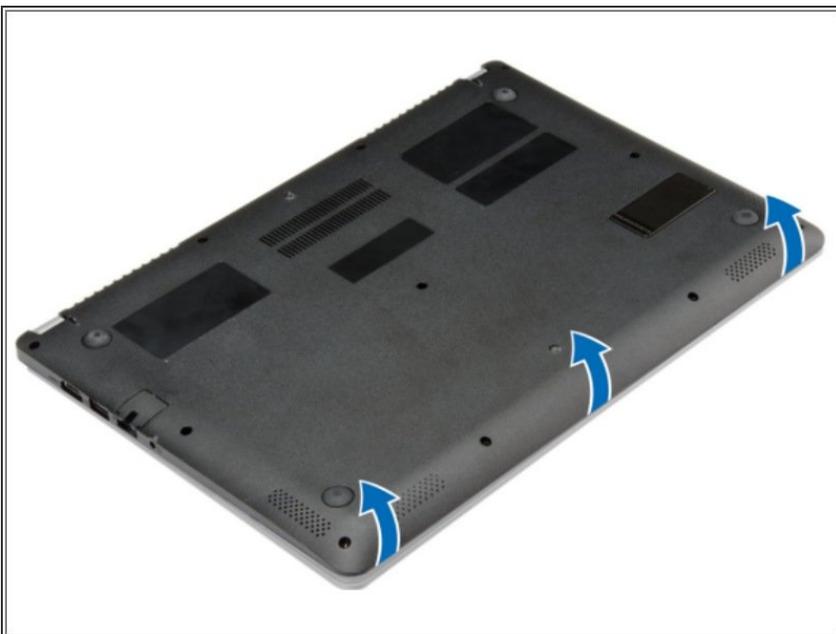


- Pry the base cover along the edges to loosen it.

### Step 3 — Removing the Base Cover




- Lift and remove the base cover from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

### Step 4 — Disconnecting the Battery Cable

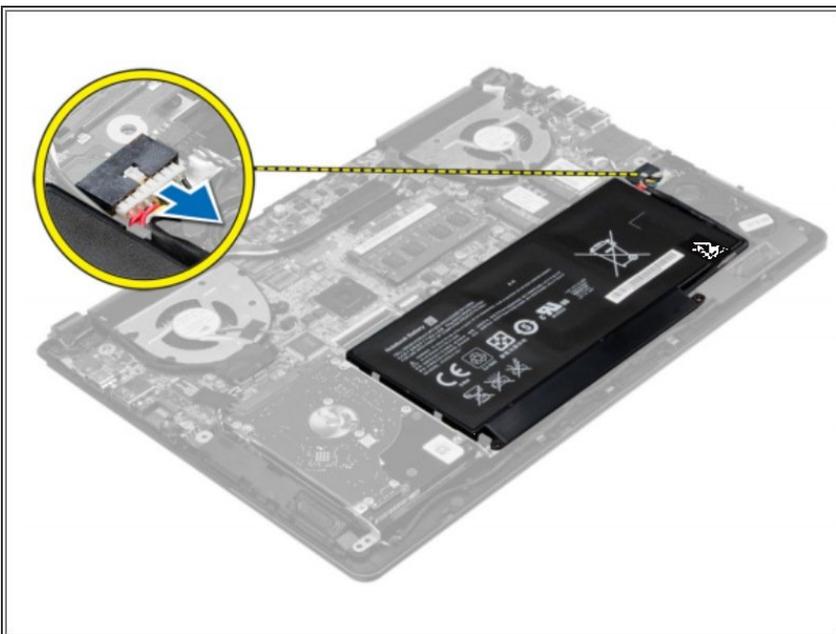

- Disconnect the battery cable from its connector on the system board.

## Step 5 — Releasing the Tabs

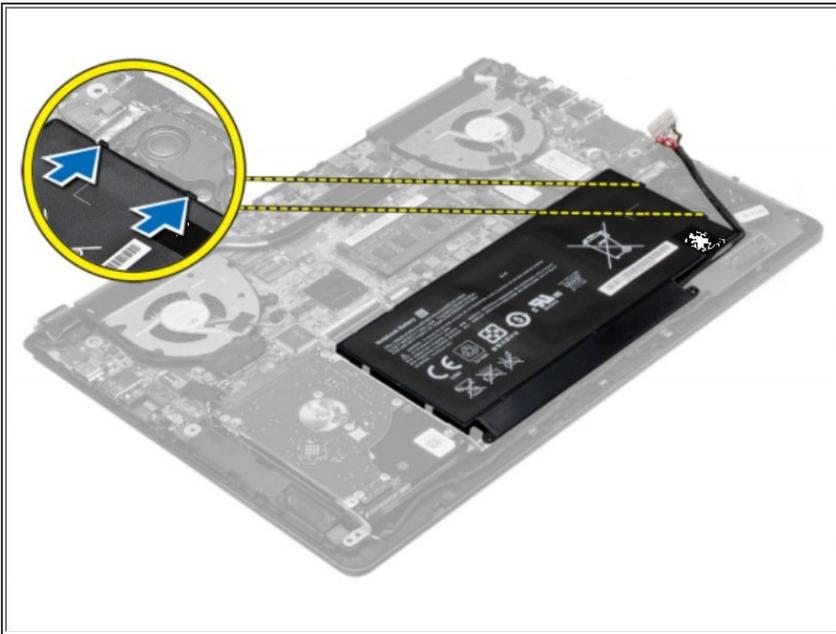


- Release the tabs that secure the battery in the battery bay.

## Step 6 — Removing the Battery



- Lift and remove the battery from the computer.
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 7 — Memory Module

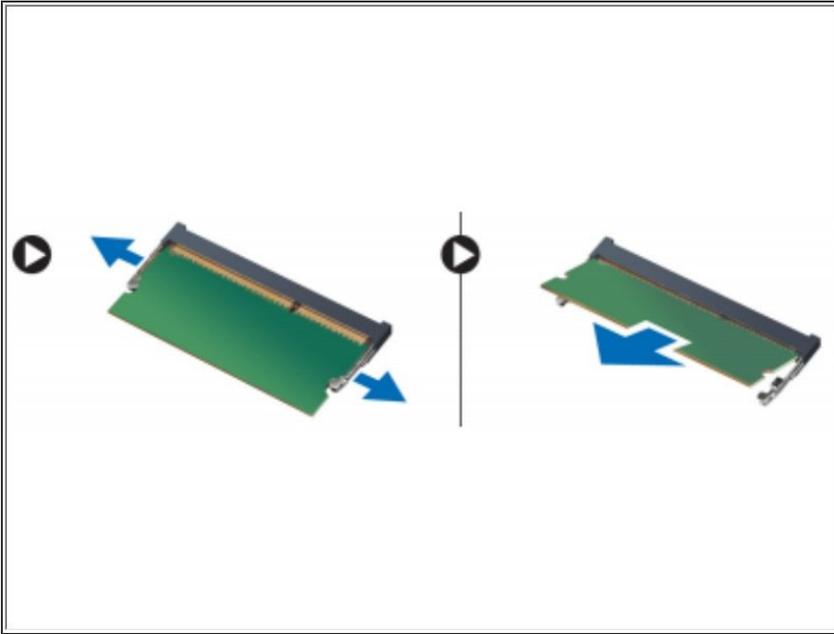

- Pry the securing clips away from the memory module until it pops up. Remove the memory module from its connector on the system board.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

To reassemble your device, follow these instructions in reverse order.