



Diode values, iPhone 6 front end camera J1111

Diode values, iPhone 6 front end camera J1111

Redigido por: Universo Técnico

Motherboard iPhone 6 J1111

GND	40	39	GND
OL	36	35	OL
0.723	34	33	0.442
0.507	32	31	0.453
0.450	30	29	0.450
0.507	28	27	GND
OL	26	25	0.737
GND	24	23	0.508
GND	22	21	GND
0.449	20	19	0.446
0.449	18	17	0.450
0.449	16	15	0.447
0.449	14	13	0.492
0.449	12	11	GND
0.449	10	9	GND
GND	8	7	0.534
0.307	6	5	0.330
0.410	4	3	0.405
0.409	2	1	0.405
GND	38	37	GND
	41		
	GND		



FLUKE
Modelo 117



-  Escala de Diodo
-  Escala de Diodo
-  Diode Scale
-  Modalità Diodo



Universotecnico.com
Cursos especializados Microsoldering








Rodrigo Santos

Passo 1 — Diode values, iPhone 6 front end camera J1111



- Inserir instruções aqui.

Passo 2

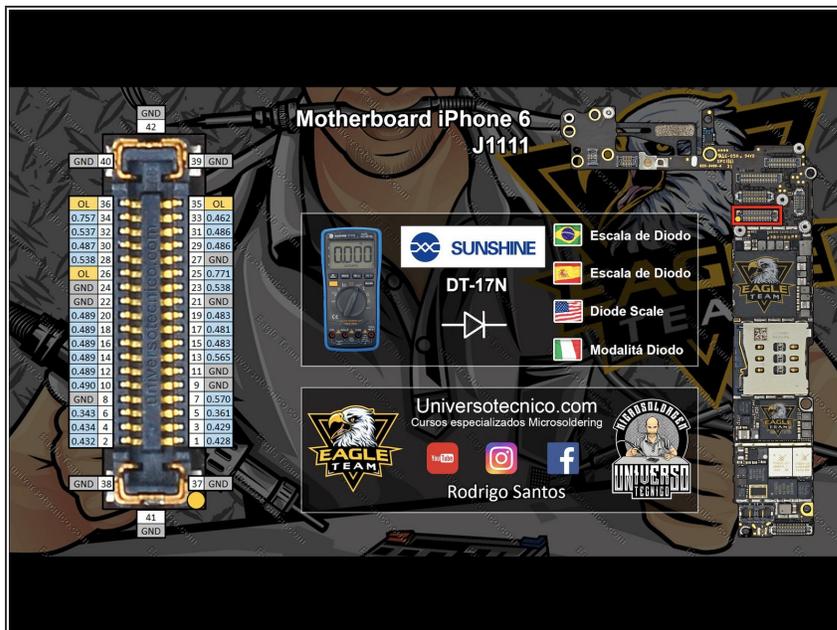

- Inserir instruções aqui.

Para remontagem de seu dispositivo, siga estas instruções na ordem inversa.