



# Samsung Galaxy Tab 8.9 LCD Screen Replacement

This guide will walk you through the process of...

Written By: Eric Bird



# INTRODUCTION

This guide will walk you through the process of replacing a broken, frozen, or unresponsive display screen on a Samsung Galaxy Tab 8.9.


---

## TOOLS:

[iFixit Opening Tool](#) (2)


---

### Step 1 — Insert Opening tool

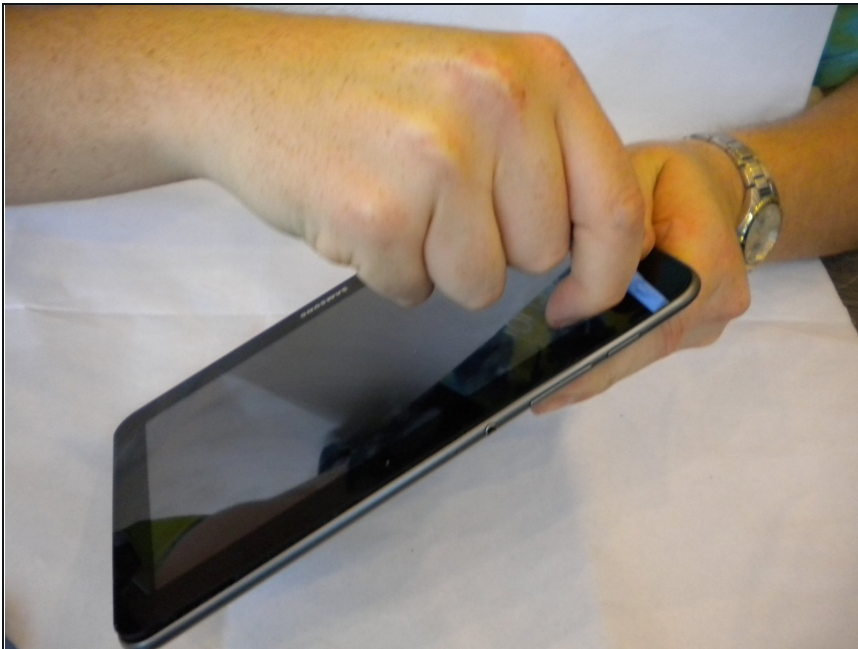


- Insert a plastic opening tool between the back cover and screen of the Samsung Galaxy Tab 8.9 (as indicated in the photograph).

## Step 2 — Insert second tool

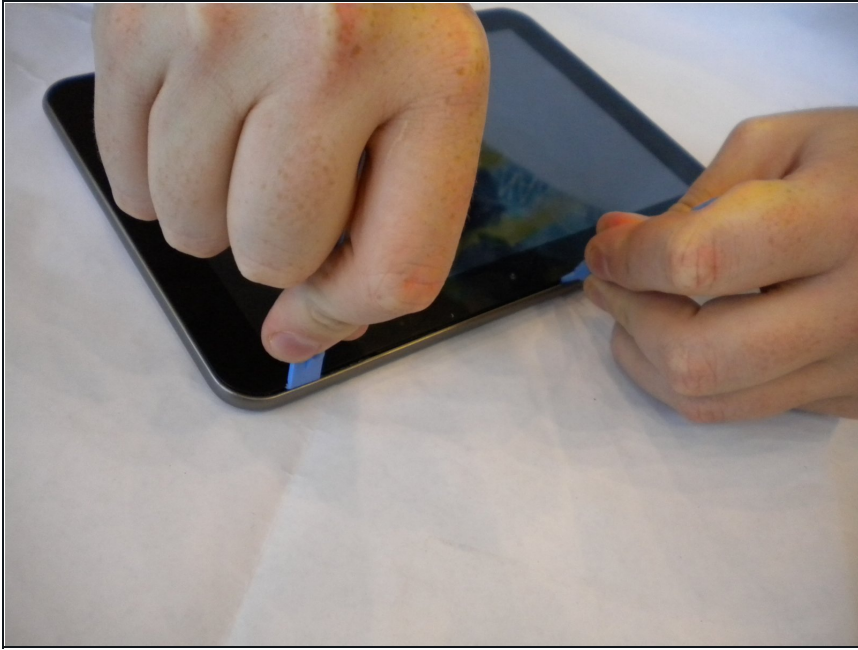

- Insert a second plastic opening tool 6 cm (~2.4 inches) away from the first tool.

## Step 3

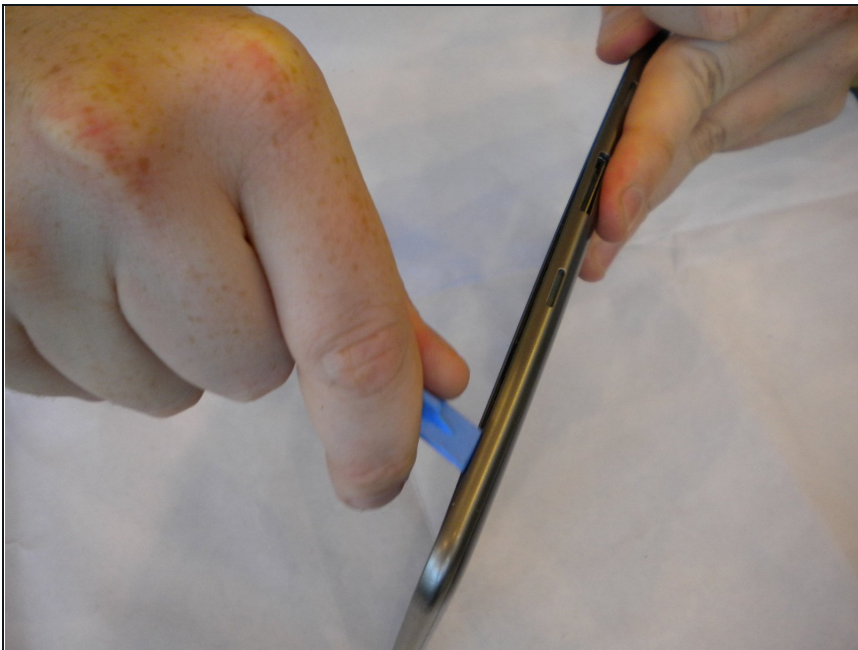


- Slide the second plastic opening tool along the edge of the device to separate the back cover.

## Step 4




- Using your hands, remove the back cover.

## Step 5 — Display

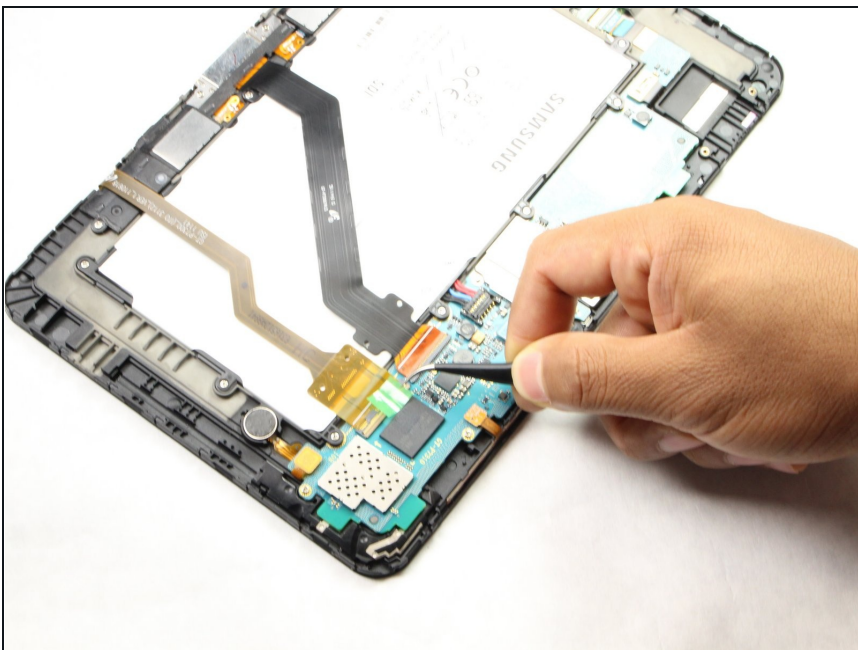

- Using [tweezers](#), peel away the green tape located on top of the two flexible ribbon cables.

## Step 6

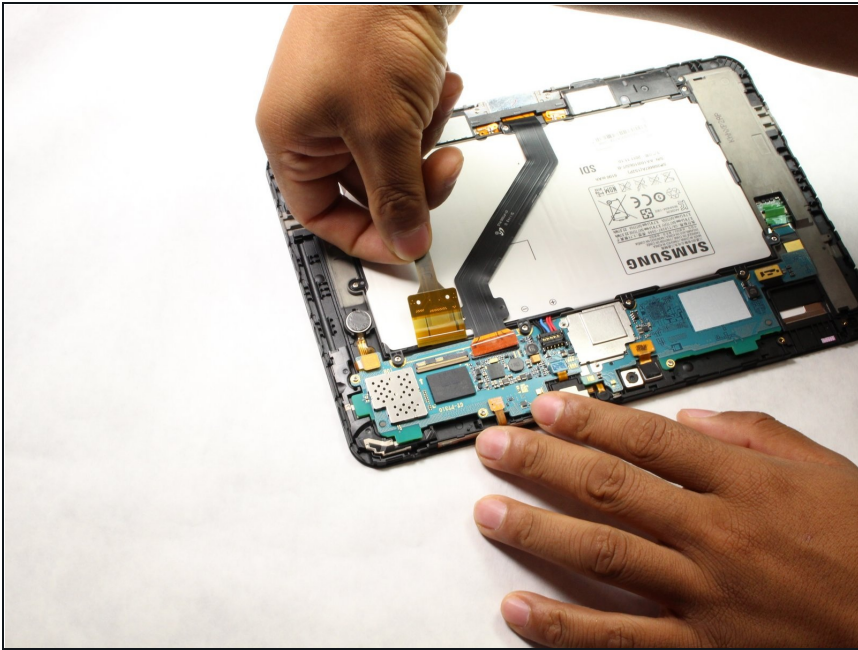


- Slide out the yellow flexible ribbon cable to disconnect it from the motherboard.

## Step 7



- Remove green tape from lcd connector.

## Step 8

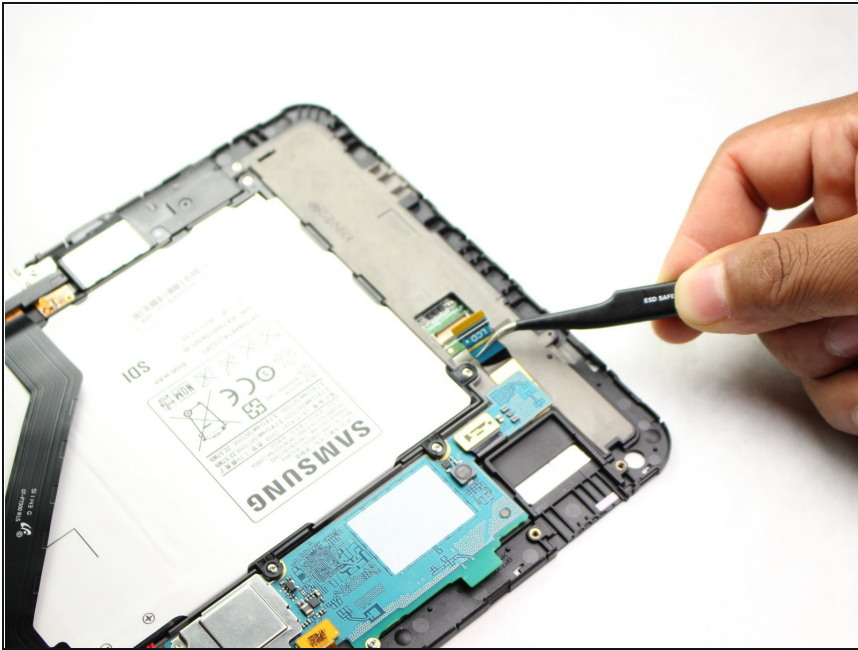


- Pull lcd cable out of connector.

## Step 9



- Slide metal tool around perimeter to release glue.
- ⚠ Be careful not to damage the yellow ribbon cable.

## Step 10

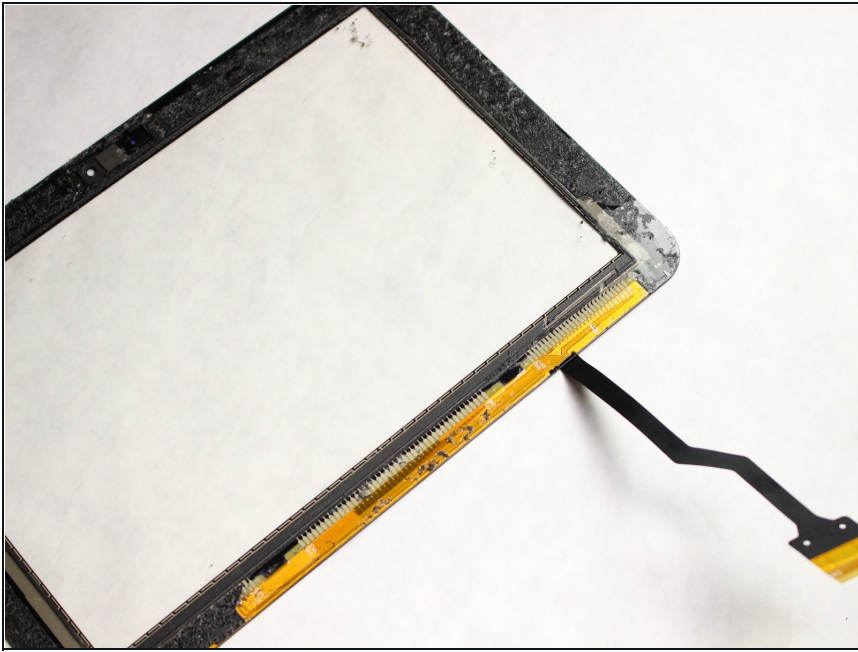

- Pull glass cover from main frame.

## Step 11



- Pry screen from housing.

---

To reassemble your device, follow these instructions in reverse order.

